


76222

SAE "D" TO SAE "D"

WET

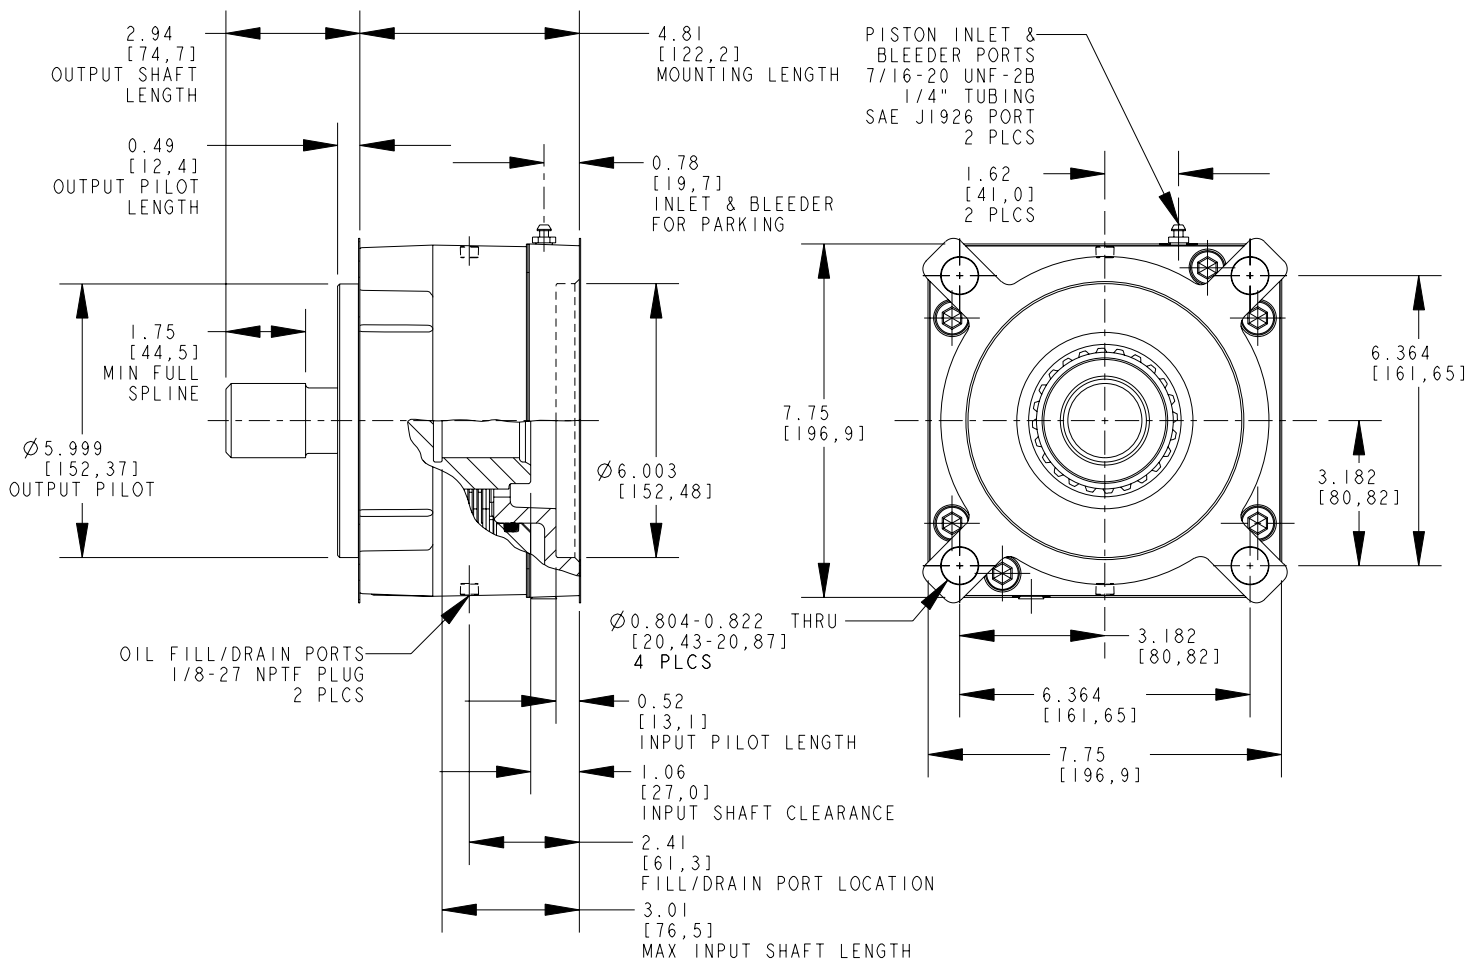

| | |
|---------------------------------|--|
| RATED TORQUE | 20,000 (2,260) |
| FULL RELEASE PRESSURE | 295 (20) |
| INPUT SPLINE (INTERNAL) | 13T 8/16 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE |
| OUTPUT SPLINE (EXTERNAL) | 13T 8/16 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE |
| OIL FILL VOLUME HORIZONTAL (mL) | 200 |
| OIL FILL VOLUME VERTICAL (mL) | 380 |
| O-RING SERVICE KIT | PK-1373 |
| STACK SERVICE KIT | PK-1372 |
| BEARING SERVICE KIT | PK-1371 |
| GASKET SERVICE KIT | PK-1374 |

- * UNITS: LENGTH, DIAMETER = IN (mm), PRESSURE = PSI (BAR), TORQUE = LBS IN (Nm)
- * MAX OPERATING PRESSURE FOR PARKING IS 2,750 PSI (190 BAR).
- * PRESSURE SPIKES OR SURGES ARE NOT TO EXCEED 3,500 PSI (241 BAR).
- * BRAKE CAVITY COOLING OIL PRESSURE NOT TO EXCEED 15 PSI (1 BAR).
- * MAXIMUM HORIZONTAL OPERATING SPEED IS 4,000 RPM.
- * FOR VERTICAL APPLICATION, CONTACT AUSCO FOR MAX SPEED DETAILS.
- * REVIEW IMPORTANT NOTES ON GENERAL INFORMATION.