


76349 SAE "D" TO SAE "D"

WET

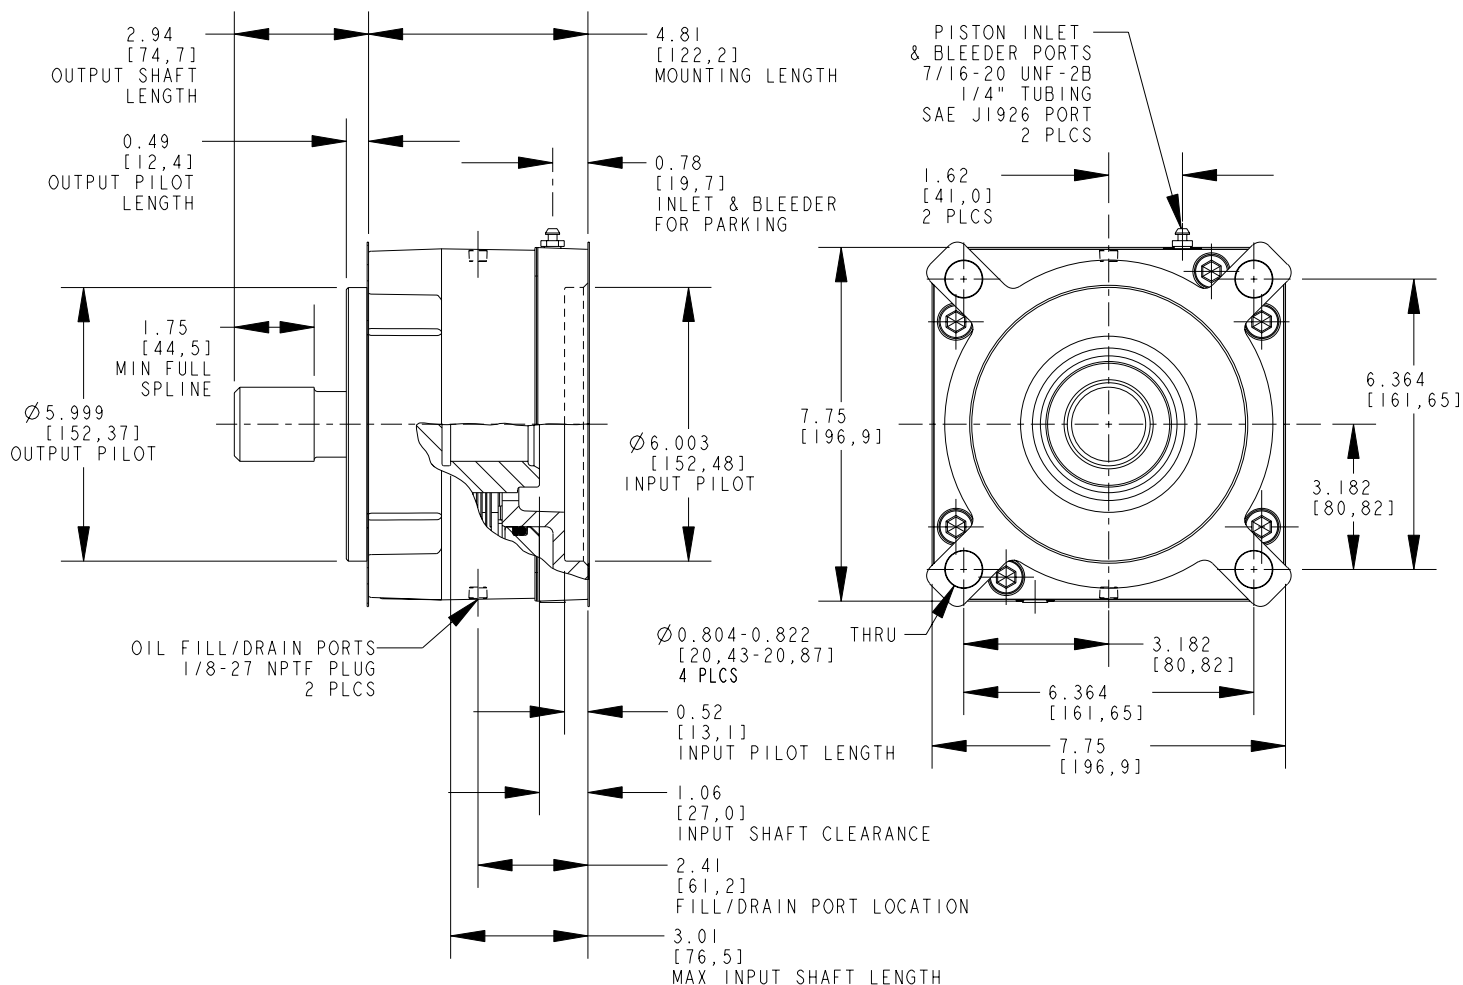

RATED TORQUE	16,000 (1,808)
FULL RELEASE PRESSURE	220 (15)
INPUT SPLINE (INTERNAL)	13T 8/16 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE
OUTPUT SPLINE (EXTERNAL)	13T 8/16 ANSI B92.1 SIDE FIT 30° PRESSURE ANGLE
OIL FILL VOLUME HORIZONTAL (mL)	200
OIL FILL VOLUME VERTICAL (mL)	380
O-RING SERVICE KIT	PK-1373
STACK SERVICE KIT	PK-1372
BEARING SERVICE KIT	PK-1371
GASKET SERVICE KIT	PK-1374

- * UNITS: LENGTH, DIAMETER = IN (mm), PRESSURE = PSI (BAR), TORQUE = LBS IN (Nm)
- * MAX OPERATING PRESSURE FOR PARKING is 2,750 PSI (190 BAR).
- * PRESSURE SPIKES OR SURGES ARE NOT TO EXCEED 3,500 PSI (241 BAR).
- * BRAKE CAVITY COOLING OIL PRESSURE NOT TO EXCEED 15 PSI (1 BAR).
- * MAXIMUM HORIZONTAL OPERATING SPEED IS 4000 RPM.
- * FOR VERTICAL APPLICATION, CONTACT AUSCO FOR MAX SPEED DETAILS.
- * REVIEW IMPORTANT NOTES ON GENERAL INFORMATION.