


**SOLENOID OPERATED VALVES  
 POPPET 2-WAY NORMALLY OPEN  
 COMMON CAVITY**

**VEI-8A-2A-06-NA-S-NSS**

**SIZE 08**

**OD.15.06.18 - Y - S0**



**PATENT PENDING**

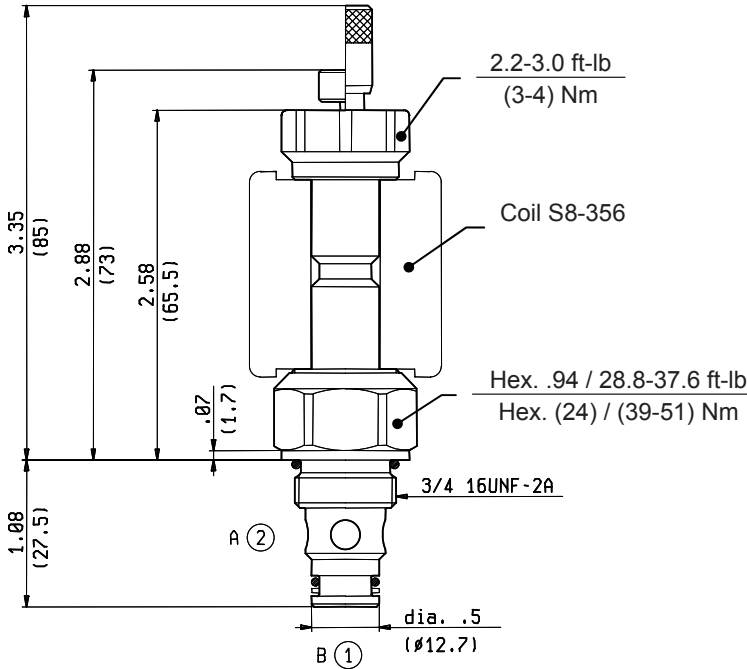

Inches  
(mm)

**TECHNICAL DATA**

Maximum Operating Pressure	5000 psi (350 bar)
Fatigue Cycle Life at 5000 psi (350 bar) and 0.5 Hz (1 s ON - 1 s OFF)	10 million cycles
Rated Flow	11 gpm (40 l/min)
Cavity - Tooling (CA-08A-2N)	page CT.A.001.U
Line bodies	page MN2.A...
Weight	0.286 lbs (0.130 kg)
Fluids - Temperatures	page 7.01.040
Testing Conditions - Seals	page 7.01.040
Internal Leakage	page 7.01.040
Filtration : 25 µm nominal or better	page 7.01.050
Minimum Voltage Required	90% of nominal
<b>Coils must be ordered separately</b>	<b>page 1.71.042</b>
Mounting Position	unrestricted

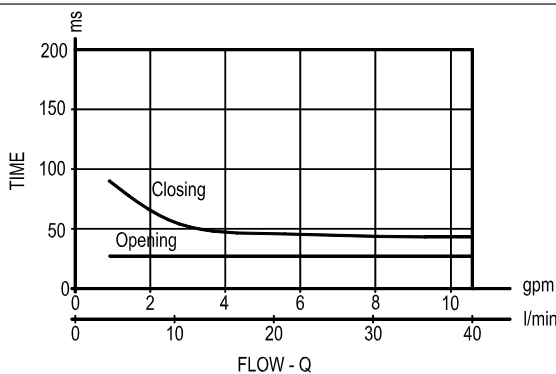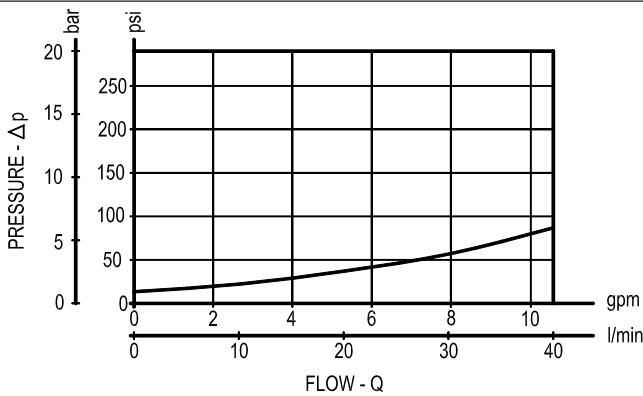

**Y ORDERING OPTIONS**

<b>1A</b>	Standard	
<b>1B</b>	Push Style Manual Override	
<b>1C</b>	Push and Twist Style Manual Override	