


NAYTONTECH

90-93 DA/DB Acura Integra Center Console Cup Holder/Gauge Pod Install Instructions v2 - Updated 11/7/2023

1. Remove the center console from your car.
2. Remove the 4 zip ties holding the shipping X brace from your new cup holder or gauge pod.
 - a. This X brace can be discarded, it is only for shipping.
3. From the underside of the center console remove the 4 screws that hold in the factory tray.
4. Insert the NaytonTech cup holder and align the 4 screw holes. Put in the 2 bottom screws first (see picture below)

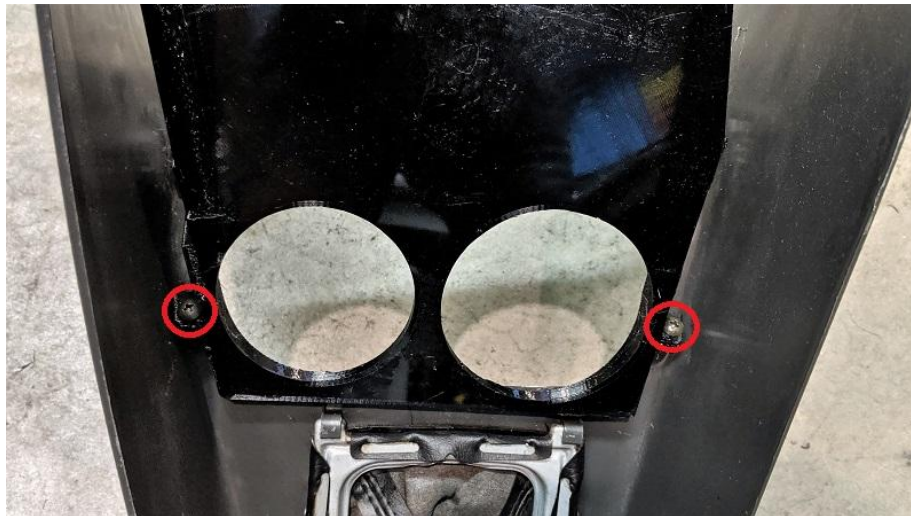

5. Now put in the 2 upper screws – WARNING – be very careful when putting these in. Because of the tight space I am unable to make these upper supports much stronger. It's best to only adjust them to line up with the screw holes and not the front of the lip. **Adjusting these too far in/out can cause them to crack!**



6. You can put the cups into the holes now and press them in until they touch the small lip at the top of the cup (v2 cups), they are not designed to be flush so do not push them in that far.
 - a. The V2 lip doesn't go all the way around and should line up with the back flat area, not the front lip.
7. Reinstall the console into your car and enjoy your new cup holders or gauge pods.

If you have any questions about installation, please email us at naytontech@gmail.com