




Be ahead



# ARES BT A

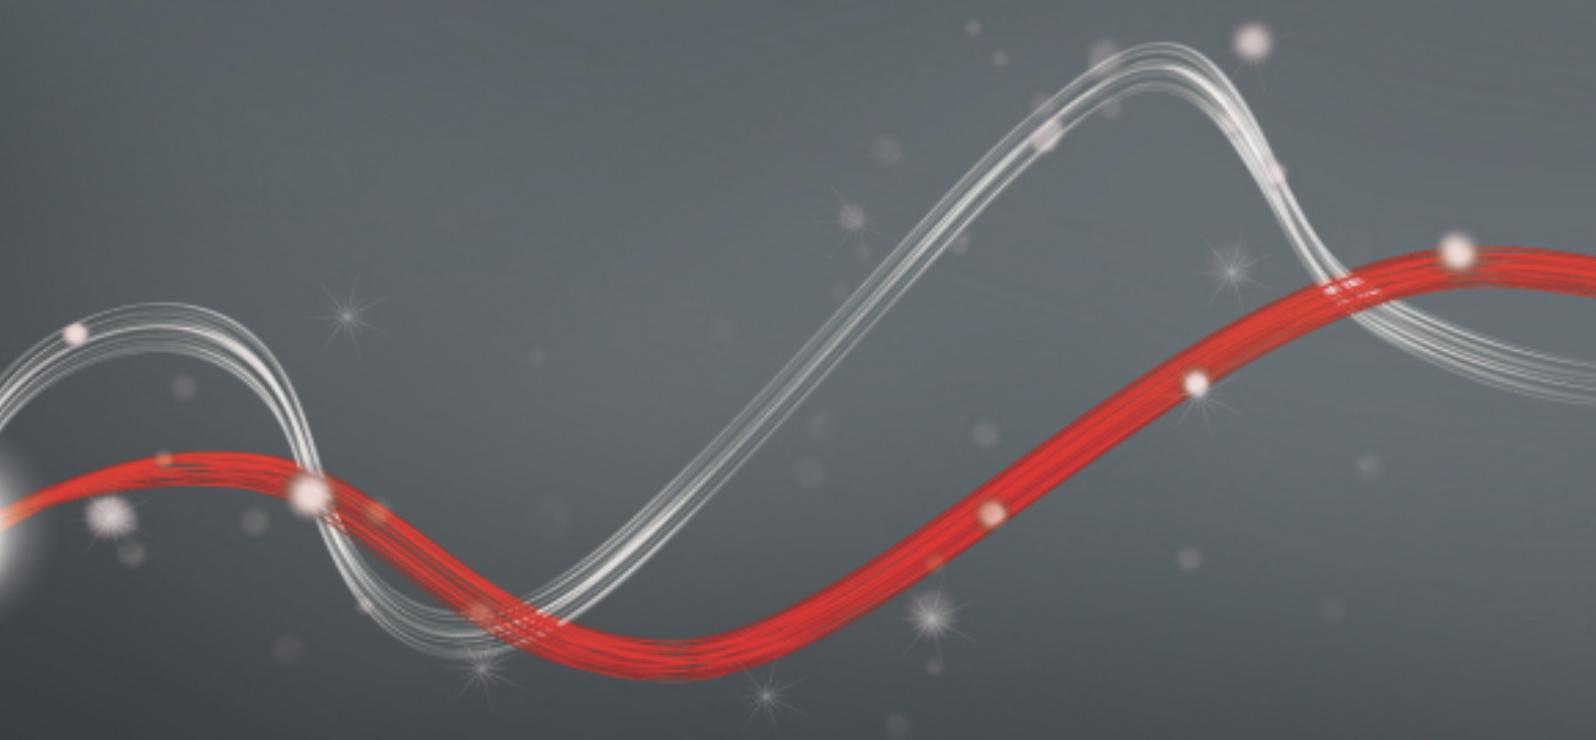

## Product

• ADVANTAGES  
• PLUS

• CONTROL UNIT  
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK



- ee link
- 24 V
- er ready
- d-track

## ARES BT A

Code	Name		Description	
P926189 00002	ARES BT A1000		Operator 24 V for sliding gates up to 1000 kg in weight. Leaf speed 9 m/min. Limit switch Electromechanical.	
P926190 00002	ARES BT A1000 V		Operator 24 V for sliding gates up to 500 kg in weight. Leaf speed 12 m/min. Limit switch Electromechanical.	
P926187 00002	ARES BT A1500		Operator 24 V for sliding gates up to 1500 kg in weight. Leaf speed 9 m/min. Limit switch Electromechanical.	
P926188 00002	ARES BT A1500 V		Operator 24 V for sliding gates up to 750 kg in weight. Leaf speed 12 m/min. Limit switch Electromechanical.	



· Product

· **ADVANTAGES**  
· **PLUS**

· CONTROL UNIT  
· TECHNICAL FEATURES

· ACCESSORIES

· **DISCOVER U-LINK**

## ADVANTAGES

**Simplified and intuitive wiring:** the Hamal control units have standardised terminal blocks with different colours depending on the input and output function blocks for maximum ease of connection of operators and accessories.

**Obstacle recognition:** The D-Track torque control system together with the virtual encoder ensure maximum precision in the control of leaf movement and the recognition of obstacles, ensuring maximum safety for people and property, as well as facilitating certification of the system.

## PLUS



**release lever with personalised key:** the release lever simplifies motor release and the personalized key ensures its uniqueness, for better safety



**front screws:** this arrangement of the casing screws offers ease and convenience during installation and maintenance, even when there is limited space.

• Product

• ADVANTAGES  
• PLUS

• CONTROL UNIT  
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK


## HAMAL



### HAMAL

- Application: control unit for 1 24V operator for sliding gates
- Board power supply: 230V single-phase
- Operator power supply: 24V 80W
- Main features: removable terminal blocks with new standard colour-coding, dip-switch programming and potentiometers, incorporated dual channel receiver, D-Track anti-crushing system, slowdown during opening and closing
- Main functions: automatic re-closing, pedestrian opening, input for 8k2 edge, fast closing

	ARES BT A1000	ARES BT A1500
Control unit	HAMAL	
Power supply	24 V	24 V
Power input	240 W	400 W
Pinion module	4	4
Slowdown	yes	yes
Locking	mechanical	mechanical
Release	knob operated with personal key	knob operated with personal key
Frequency of use	intensive	intensive
Environmental conditions	from -20 °C to 55 °C	
Protection rating	IP24	
Actuator weight	7 kg	7 kg
Impact reaction	d-track	d-track



• Product

• ADVANTAGES  
• PLUS

• CONTROL UNIT  
• TECHNICAL FEATURES

• ACCESSORIES

• DISCOVER U-LINK

	Code	Name	Description
	D571053	<b>CVZ</b>	Steel rack, 4-module, cross-section 30 x 12 mm, length 1 m, screw-fitted on supports (supplied)
	D111904	<b>MITTO B RCB02 R1</b>	Transmitter with 2 channels. Range 50/100 m. Power supply 12 V with 1 battery type 23 A
	P121023	<b>Q.BO KEY WM AV</b>	 Vandalproof key selector with double contact, for outdoor use. Metal structure.
	P121022	<b>Q.BO KEY WM</b>	
	P121024	<b>Q.BO TOUCH</b>	  Wireless digital touch button panel 433Mhz rolling code.
	P121025	<b>Q.BO PAD</b>	 Vandalproof digital push-button panel, for outdoor use. Metal structure and s/steel buttons. Compatible with WIEGAND protocol, it ensures maximum system safety as it does not directly control the opening of the entry point.
	P125035	<b>SL BAT2</b>	 set of backup batteries for Deimos BT A and Ares BT A
	P111527	<b>DESME A15 O</b>	 Pair of photocells adjustable horizontally and vertically. IR signal synchronised to prevent any risk of blinding. Range . Power supply ac/dc.
	P111526	<b>DESME A15</b>	
	P903018	<b>PHP</b>	  Pair of aluminium posts for THEA/DESME series photocells Height 522 mm
	D113748 00003	<b>RADIUS B LTA 24 R1</b>	Flashing light without incorporated antenna for motors with power supply 24 V.
	D113749 00003	<b>RADIUS B LTA 24 R2</b>	
	N190104	<b>BIR C</b>	Rubber safety edge (H 30 mm), price per m
	P125018	<b>THEKE B PRA 01</b>	Metal protection box for ARES and ICARO series sliding operators
	N999156	<b>SFI</b>	Anchor base for ARES and ICARO (supplied with operator)

· Product

· ADVANTAGES  
· PLUS

· CONTROL UNIT  
· TECHNICAL FEATURES

· ACCESSORIES

· DISCOVER U-LINK

## What is U-Link?

The innovative technology that gives you new power

An exclusive Bft innovation: U-Link (Universal Link) is an exclusive Bft platform that allows the creation of technological ecosystems. In Home Automation Access, it allows communication with all the home access automation devices of any brand. So you save time and can control everything with ease, without any worries.

### It is intuitive

Easy to install and use

### It is scalable

Allows an unlimited number of devices to be added

### It is flexible

Allows the creation of groups of interconnected products

### It is practical

Works with or without a web connection

### It is functional

Parameters can be controlled remotely via dedicated applications

- Product
- ADVANTAGES PLUS
- CONTROL UNIT TECHNICAL FEATURES
- ACCESSORIES
- DISCOVER U-LINK

## All in one scheme: discover this amazing technology

A unique platform allowing the creation of technological ecosystems offering a wide range of solutions for different sectors.

Thanks to the B-Eba cards and the Clonix U-Link receiver, this proprietary platform featured by Bft products adapts to any protocol and access automation product (even non-Bft and old generation), and is used in various sectors. Each device thus becomes smart and can be interconnected with other systems, thanks to a language that becomes universal.

### U-Base 2



Software to install, easily and comfortably carry out maintenance and identify any malfunction of U-link compatible operators.

### U-SDK



U-SDK is the innovative application that can make Bft automation systems compatible and easily integrated with a BMS network for the supervision of buildings.



### Magistro

An innovative and easy to install system for easily managing all the home automation.



### U-Control

U-Control is the application that helps the simple and quick integration of BFT automations in large building management systems.



### Blue-Entry


Technology abreast of the times and attentive to daily needs: thanks to the use of U-link the house gate can now be opened with just your smartphone.



### Clonix U-Link

Allows the connection of old-generation products or non-Bft products to U-Link systems.

Old-generation Bft operators or a product belonging to other brands: can they be connected to U-link? Yes, thanks to the Clonix receivers. Accessories that know no limits.

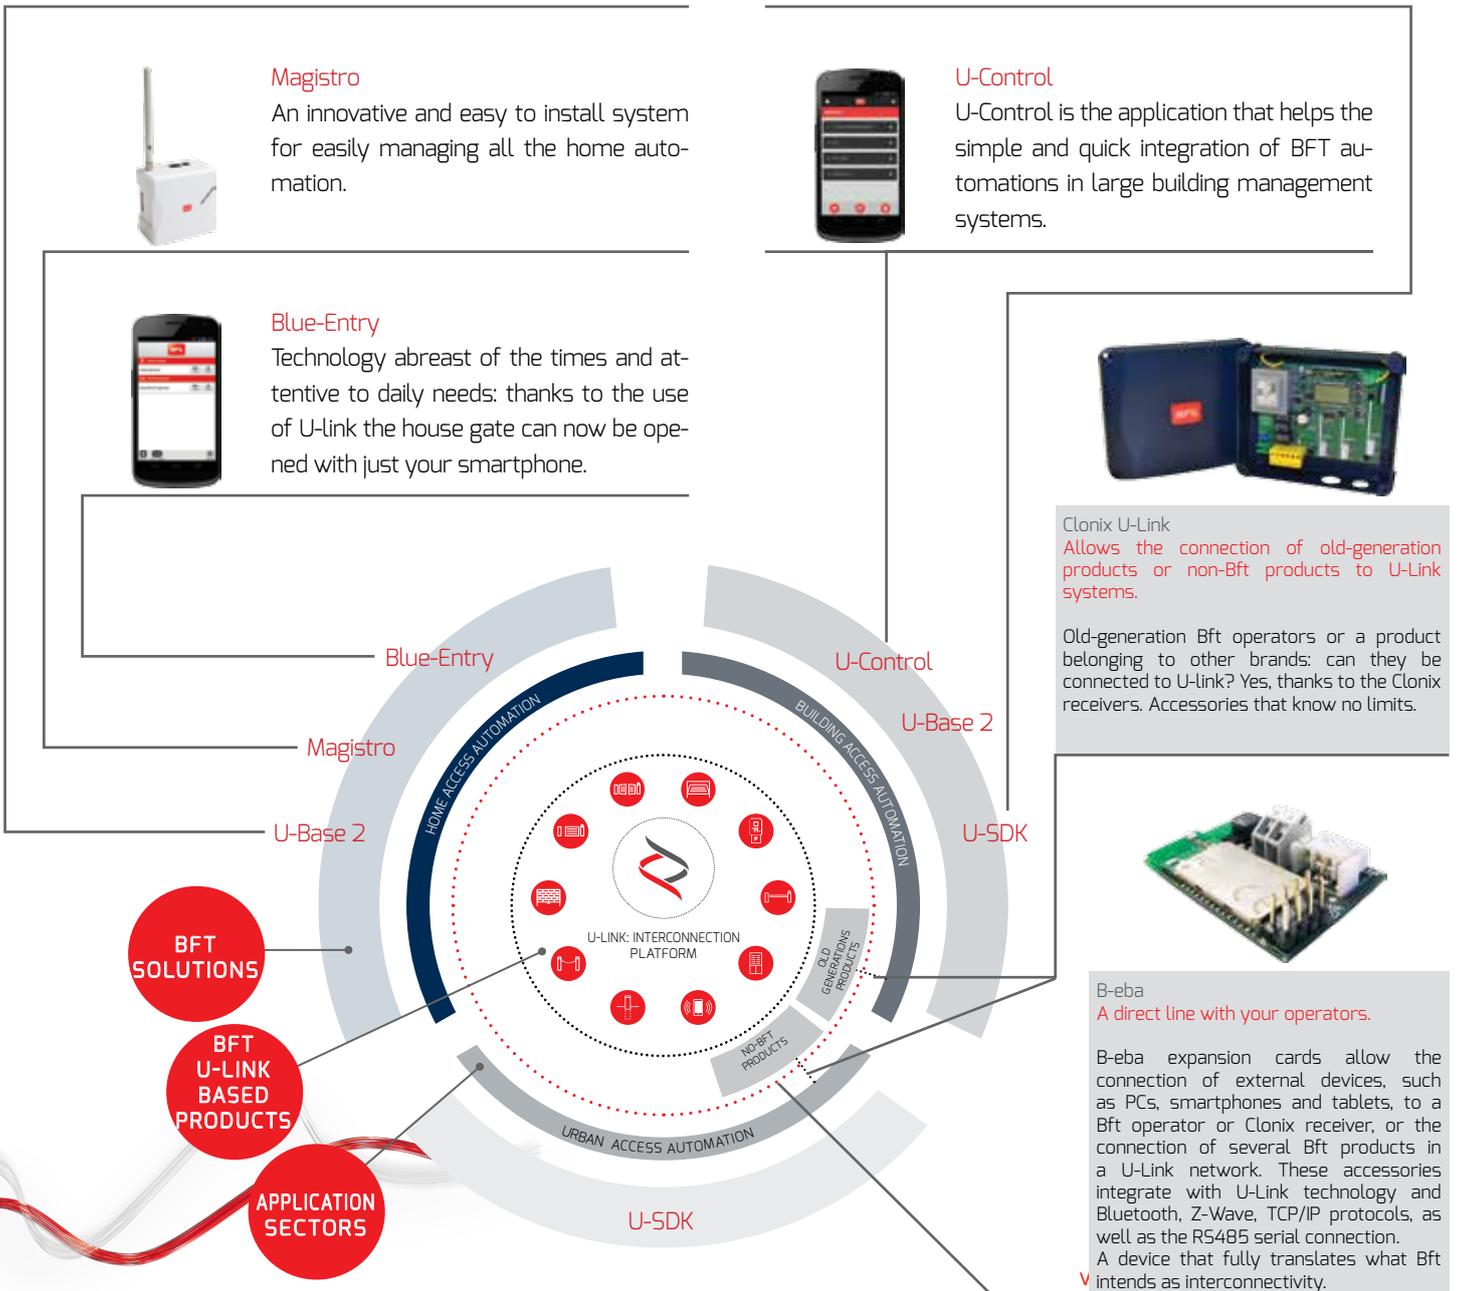

### B-Eba

A direct line with your operators.

B-eba expansion cards allow the connection of external devices, such as PCs, smartphones and tablets, to a Bft operator or Clonix receiver, or the connection of several Bft products in a U-Link network. These accessories integrate with U-Link technology and Bluetooth, Z-Wave, TCP/IP protocols, as well as the RS485 serial connection. A device that fully translates what Bft intends as interconnectivity.



INFORMATION REGARDING THE PROTECTION OF THE INDUSTRIAL AND INTELLECTUAL PROPERTY RIGHTS OF BFT. BFT S.p.A. protects its industrial property by depositing trademarks, patents, models and designs. The intellectual property of BFT S.p.A. is protected by copyright law. BFT S.p.A. also protects its know-how by taking measures to protect the technical and commercial information inherent in its company and products. All the products in this catalogue are ORIGINAL BFT MODELS and only BFT S.p.A. is authorised to produce them and market them anywhere in the world. All the commercial names in this catalogue are owned by BFT S.p.A., and only BFT S.p.A. is authorised to use them in relation to the corresponding merchandise category. FALSIFIERS WILL BE PROCEEDED AGAINST IN ACCORDANCE WITH BOTH CIVIL AND CRIMINAL LAW. THESE CONDITIONS NOT ONLY GUARANTEE THE INTELLECTUAL PROPERTY RIGHTS OF BFT, BUT ALSO PROTECT CUSTOMERS BY GUARANTEEING THAT THE PRODUCTS THEY ARE PURCHASING ARE ORIGINAL BFT PRODUCTS RESULTING FROM STUDIES AND DESIGNS WITHIN THE BFT COMPANY.