

Non e permesso consegnare a terzi o riprodurre questo documento, ne utilizzare il contenuto o renderlo comunque noto a terzi senza autorizzazione esplicita. Ogni infrazione costituirà un evidente abuso e comporterà il risarcimento dei danni subiti. E' fatto riserva di tutti i diritti derivanti da brevetti o modelli.

Toute communication ou reproduction de ce document, toute exploitation ou communication de son contenu sont interdites, sauf autorisation expresse. Tout manquement a cette regle constitue un abus evident et expose son auteur au versement de dommages et interets. Tous droits de propriete industrielle reserves, notamment en matiere de brevets et de modesles.

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Contrivention of this restriction will constitute an evident abuse and result in a liability to the payment of damages. All rights are reserved in the event of the grant of patent or registration of a utility model or design. This document is the subject of copyright.

Weitergabe sowie Vervielfaeligung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdruendlich zugestanden. Zuwiderhandlungen stellen einen offensichtlichlichen Missbrauch dar und verpflichten zu Schadensersatz. Alle Rechte fuer den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

1	2	3	4	5	6	7	8			
A	B	C	D	E	F	G	H	I	J	K
for Tube 6x1,0 new Line <CI>	M12x1,5	8	Hex.18	Ø15,4	30,6	20Nm (24Nm)	(19,5) Push in length <CI>	1,5	Ø18,3	with O-ring

G : recommended torque without lubrication (max. torque) respect max torque of counter part


Cleanliness requirement:

Class: K00 according JED-593

Area: for the whole part (Special agreements possible; to be agreed with Product Engineering)

Material:

- ① CuZn
- ② PA (inner components)
- ③ EPDM

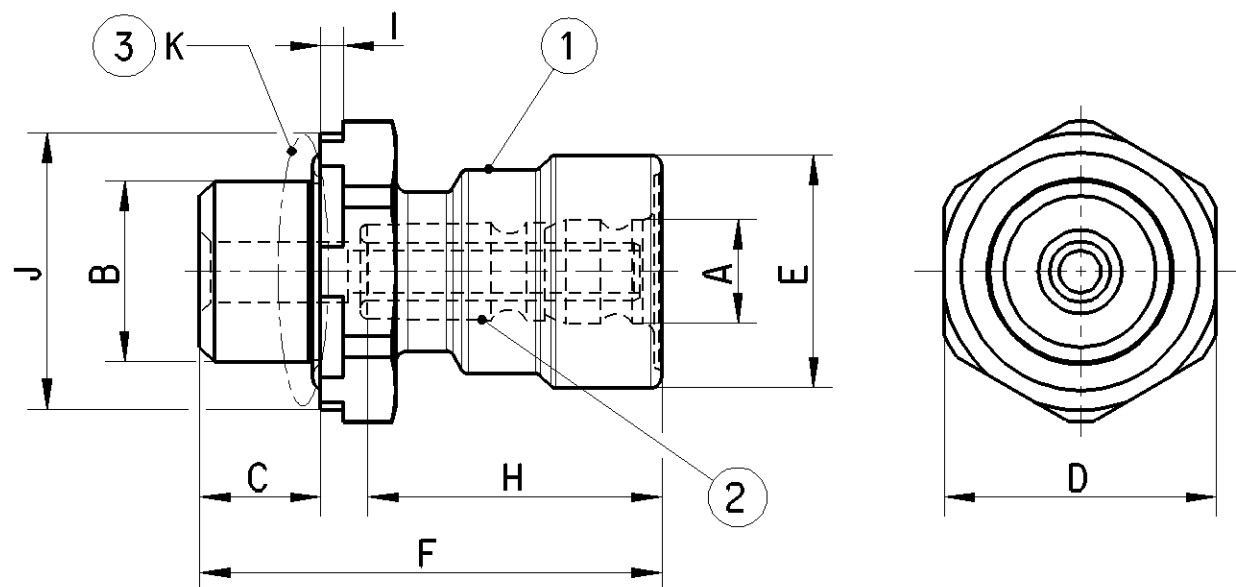


General Specification : JED-762 ; JED-622 ; JED-220

Engineering related agreements with Supplier have to be mentioned in the "Release of Supplier"

For use in application in compressed air systems in commercial vehicles :

- with Polyamind or Hytel tubes acc. ISO7628; DIN74324, DIN73378
- with compressed air acc. JED-848
- at working conditions (consider tube spec.) :
 - -40 °C ... 100 °C
 - max. 12,5 bar



General Specification: JED-334-1, Size ISO 14405-1 LP		Copyright WABCO®		WABCO											
Further Technical Data:		Date	Signature												
Doc. Code:	Sheet:	To	Drawn		Screw-in Fitting										
General Tolerances			2019-11-28	Balogo											
Range of Nominal Dimensions (± mm)			Checked												
Class 1)			2019-12-11	Szczulkowski											
			Expert												
			Szczulkowski												
Fine	X	0.5	1.0	1.5	2.0	Material No. 893 800 802 2	Date of first issue: 2013-08-07								
Medium		1.0	2.0	3.0	4.0		0.025 KG	2:1 1:1	Doc.Code	Language	Sheet				
Coarse		2.0	3.5	5.0	6.5				A 3	Pro/E	502571	2 x	C	5790	005
Tapped Holes acc. -			Size		CAD System	ECN-No.		Revision	Techn. Resp.	Replacement for					
1) Tolerance Class Applied Crossmarked			A 3		Pro/E	502571		2 x	C	5790			-		

