

**Tab F - Specification Sheet**  
**by E. Barber and J. Osgerby, 2012**

**Mounting**

|                                   |   |
|-----------------------------------|---|
| Lamp (Bulb) Description           | 14 x LED 3000K 425lm CRI 80 - 5W  |
| Environment                       | Indoor - Dry Location   |
| Finish                            | White   |
| Technical and Product Description | TAB F floor lamp providing direct lighting with adjustable head. Body in painted pressofused aluminium. Multi-led diffuser in specially designed PMMA to avoid the "multi-shadow" effect and dazzle. Head rotation $\pm 45^\circ$ |

**Electrical**

|           |                             |
|-----------|-----------------------------|
| Voltage   | 120                         |
| Switching | ON-OFF switch on power cord |


**Physical**

|                       |                         |
|-----------------------|-------------------------|
| Cord Length (inches)  | 78                      |
| Construction Material | Die Cast Aluminum, PMMA |
| Weight                | 4.4 lbs                 |



F6561009 White

**Dimensional Image**

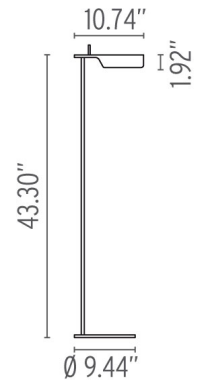

**Certifications**

