

INFLATE

1. Unroll camp pad and lay it flat on a clean surface with CORE logo face-up.



(fig. 2)

2. Locate and open valve to the "INFLATE" position (fig. 1).

3. Uncinch bottom of carrybag to locate and unpack pump sack (fig. 2).



4. Connect pump sack valve plug to camp pad valve (fig. 3). Open free end of pump sack and hold 10-12" away from your mouth.


5. Blow 1-2 breaths into pump sack, (fig. 4) then quickly close sack and begin rolling it towards the camp pad, applying pressure to push air into the camp pad as you go (fig. 5).

6. Repeat steps 4 and 5 as needed until camp pad reaches preferred level of firmness. Once inflated fully, close valve.


TIP: If the camp pad feels too firm you can use the "Micro-Adjust" feature on the inflate valve to release small bursts of air from camp pad. To do this, open inflate valve to micro-adjust position and press down on the green trampoline for 1-2 seconds at a time until you find that *just right* level of comfort.




(fig. 1)




(fig. 3)



(fig. 4)




(fig. 5)



DEFLATE

1. Open valve to "deflate" position. Air will rapidly exit the camp pad (fig. 6).

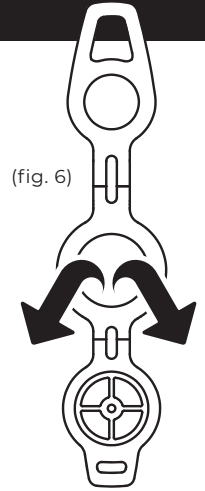

(fig. 6)

2. Once the camp pad is mostly flat, keeping valve open, fold pad lengthwise into 3rds (fig. 7).

(fig. 7)



3. Starting at the foot of the pad, opposite of the valve, begin tightly rolling the pad pressing the air out as you go (fig. 8).

(fig. 8)



4. Once rolled up, place camp pad into carry bag and cinch closed.

5. To pack pump sack, simply stuff back into designated compartment and cinch closed.

We've got you COVERED.

Our products feature a 1-year warranty. If you have any questions or product concerns, please contact us.



1-Year Limited Warranty

VISIT:

coreequipment.com/pages/warranty

Need some help?

☎ 1-888-775-5628

✉ help@coreequipment.com

🖱 coreequipment.com

Scan to learn more and see detailed instructions.



Elevate LLC
Overland Park, KS 66223

Made in China