



Rowan Engineering

Single Shot Loader .177 and .22 cal. FX Dreamline and Crown

Thank you for your purchase. Please read these fitting instructions before using the loader.

Your kit should contain –

1 off FX SSL


1 off 1.5mm allen key

1 off 2mm allen key


Safety first.

Observe safe practices when handling your rifle and follow the manufacturer's safety instructions when doing so. Take extra care when working on your rifle. Ensure that the rifle is un-cocked and the safety catch is set to safe and is absolutely not loaded with pellets.

1. Before fitting the loader, please read and understand these instructions fully. The loader can only be fitted from the normal magazine loading side on the right. This is done in a similar manner as fitting the FX multi-shot magazine and can be retained by rear 'twist lock'.

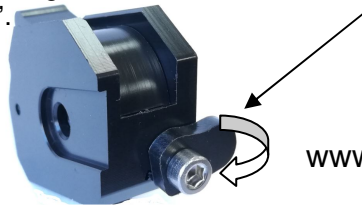

2. A grub screw can apply more or less pressure to swell the pellet 'grip o'ring' such that the pellet is gently retained in the loading arm.

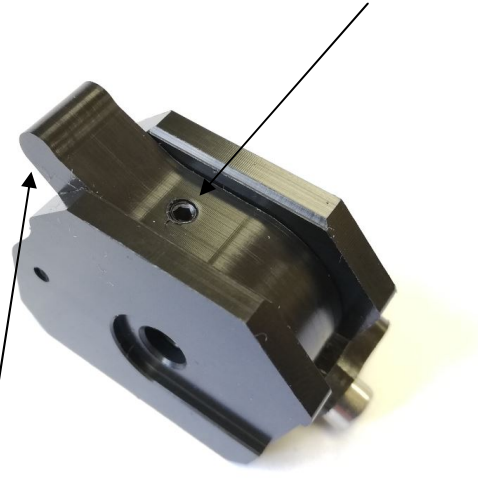

3. Open and close is by using the small lever on the side of the loader arm

4. Once fitted, the loader is ready for use.