



Single Shot Loader .177 and .22 cal. FX Dynamic, Panthera, King

Thank you for your purchase. Please read these fitting instructions before using the loader.

Your kit should contain –

1 off FX SSL


1 off 1.5mm allen key

Safety first.

Observe safe practices when handling your rifle and follow the manufacturer's safety instructions when doing so. Take extra care when working on your rifle. Ensure that the rifle is un-cocked and the safety catch is set to safe and is absolutely not loaded with pellets.

1. Before fitting the loader, please read and understand these instructions fully.
The loader can only be fitted from the normal magazine loading side on the right.
This is done in a similar manner as fitting the FX multi-shot magazine.

2. A grub screw can apply more or less pressure to swell the pellet 'grip o'ring' such that the pellet is gently retained in the loading arm.
(It will take 20 to 30 shots to bed in the gripper 'o'ring).

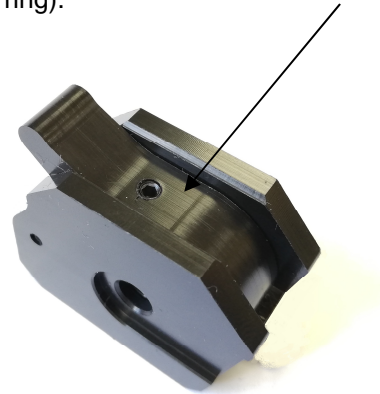

3. Open and close is by using the small lever on the side of the loader arm

4. Once fitted, the loader is ready for use.