

# General turning



Boring bars

A

Turning

## CC\*\* steel boring bar S-Clamping

SCLCR/L Kr: 95°

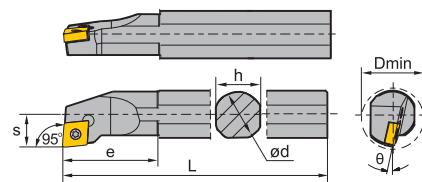

Right hand style

B

Milling

C

Drilling

D

Technical Information

E

Index

Article	*	Stock		Dimensions [mm]								Inserts
		R	L	ød	L	h	s	L <sub>2</sub>	e	D <sub>min</sub>	θ	
S08K-SCLCR/L06	● ●	8	125	7	5	14	14	10	-15	CC**0602**		
S10K-SCLCR/L06	● ●	10	125	7	5	14	14	10	-15	CC**0602**		
S10M-SCLCR/L06	● ●	10	150	9	6	14	14	12	-13	CC**0602**		
S12M-SCLCR/L06	● ●	12	150	11	9	25	25	16	-10	CC**0602**		
A08F-SCLCR/L06	*	8	80	7.5	5	14	14	10	-15	CC**0602**		
A10H-SCLCR/L06	*	10	100	9.5	6	14	14	12	-13	CC**0602**		
A12K-SCLCR/L06	*	12	125	11.5	9	25	25	16	-10	CC**0602**		
S12M-SCLCR/L09	● ●	12	150	11	9	25	25	16	-10	CC**09T3**		
S16M-SCLCR/L09	● ○	16	150	15	11	32.5	32.5	20	-12	CC**09T3**		
S16R-SCLCR/L09	● ●	16	200	15	11	32.5	32.5	20	-12	CC**09T3**		
S20Q-SCLCR/L09	● ●	20	180	18	13	38	38	25	-8	CC**09T3**		
S20S-SCLCR/L09	● ●	20	250	18	13	38	38	25	-8	CC**09T3**		
S25Q-SCLCR/L09	● ○	25	180	23	17	45	45	32	-6	CC**09T3**		
S25T-SCLCR/L09	● ●	25	300	23	17	45	45	32	-6	CC**09T3**		
A12K-SCLCR/L09	*	12	125	11.5	9	25	25	16	-10	CC**09T3**		
A16M-SCLCR/L09	*	16	150	15.5	11	32.5	32.5	20	-12	CC**09T3**		
A20Q-SCLCR/L09	*	20	180	19	13	38	38	25	-8	CC**09T3**		
A25R-SCLCR/L09	*	25	200	24	17	45	45	32	-6	CC**09T3**		
S25Q-SCLCR/L12	● ○	25	180	23	17	45	45	32	-6	CC**1204**		
S25T-SCLCR/L12	● ●	25	300	23	17	45	45	32	-6	CC**1204**		
S32R-SCLCR/L12	● ●	32	200	30	22	50	50	40	-10	CC**1204**		
S32U-SCLCR/L12	● ●	32	350	30	22	50	50	40	-10	CC**1204**		
S40S-SCLCR/L12	○	40	250	37	27	60	60	50	-8	CC**1204**		
S40V-SCLCR/L12	● ●	40	400	37	27	60	60	50	-8	CC**1204**		
A25R-SCLCR/L12	*	25	200	24	17	45	45	32	-6	CC**1204**		
A32T-SCLCR/L12	*	32	300	30	22			40	-10	CC**1204**		
A32S-SCLCR/L12	*	32	250	31	22	50	50	40	-10	CC**1204**		

● Ex stock    ○ On demand

\* With internal cooling

System code > A322

Grade selection > A42

Technical info > A501

Cutting data > A366