




**Glossy Pressed Wall Tile**


# Krea

<b>Product Size*</b>	4" x 16"
<b>Thickness*</b>	7.4 mm
<b>Number of Faces</b>	1
<b>DCOF</b>	N/A
<b>Breaking Strength</b>	≥ 125 lbs
<b>Freeze Resistant</b>	N/A
<b>Stain Resistant</b>	Resistant
<b>Recommended Grout Joint</b>	1/16 Pressed
<b>Packaging</b>	8.39 ft <sup>2</sup> per carton 20 pieces per carton 70 cartons per pallet
<b>Weight Per Carton</b>	23.13 lbs

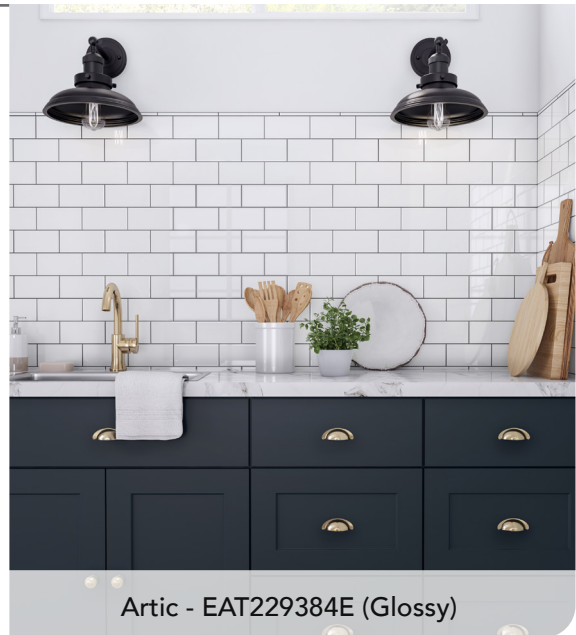

Artic - EAT229384E (Glossy)

\*All measurements are nominal.

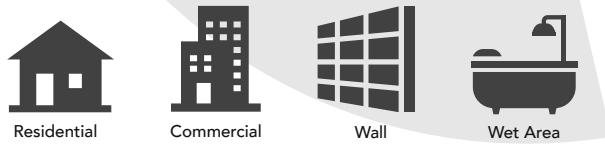

Water Absorption  
≤ 20%



Shade Variation  
V1



Finish  
Glossy



Artic - EAT29384E (Glossy)

**ATTENTION:** Be sure to specify the product with the proper wear rating for the specific area to be covered.

- > Before setting the tiles, verify the grade, shade & caliber numbers assuring that they are the same on all cartons.
- > Shade variation is inherent to ceramic tile. Tile should be combined from several cartons during installation to ensure proper blend.
- > Use only approved setting material recommended for ceramic tile on properly prepared floors & walls. Use expansion joints as required.

**VERY IMPORTANT**

Claims will not be accepted after installation

Please visit [www.earthwerks.com](http://www.earthwerks.com) for full warranty details and installation guidelines. All specifications and offerings subject to change without notice.