




Ceramic Wall Tile

Selwyn

Product Size*	10" x 14"
Thickness*	7.6 mm
Number of Faces	10
DCOF	≥ 0.42
Breaking Strength	> 275 lbs
Freeze Resistant	Resistant
Stain Resistant	Class A
Recommended Grout Joint	1/8 Lugged
Packaging	14.25 ft ² per carton 15 pieces per carton
Weight Per Carton	40.65 lbs

*All measurements are nominal.

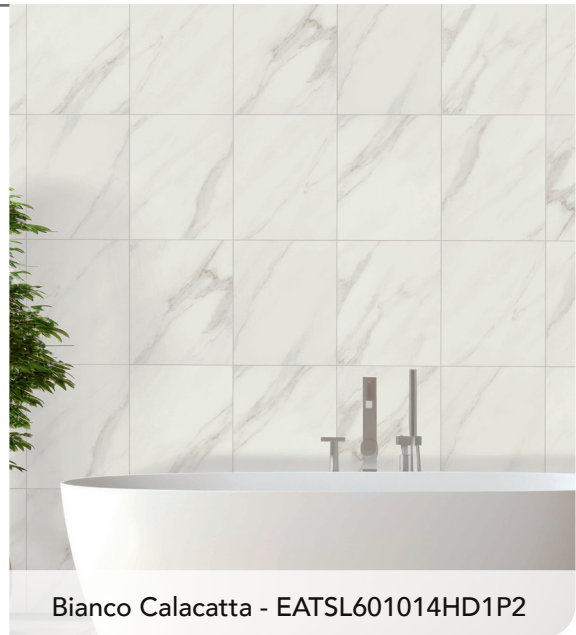

Bianco Calacatta - EATSL601014HD1P2



Residential



Commercial



Wall



Wet Area



Water Absorption

≤ 0.5%




Shade Variation

V4



Finish

Matte



Bianco Calacatta - EATSL601014HD1P2

ATTENTION: Be sure to specify the product with the proper wear rating for the specific area to be covered.

- > Before setting the tiles, verify the grade, shade & caliber numbers assuring that they are the same on all cartons.
- > Shade variation is inherent to ceramic tile. Tile should be combined from several cartons during installation to ensure proper blend.
- > Use only approved setting material recommended for ceramic tile on properly prepared floors & walls. Use expansion joints as required.

VERY IMPORTANT

Claims will not be accepted after installation

Please visit www.earthwerks.com for full warranty details and installation guidelines. All specifications and offerings subject to change without notice.