


FEATURES

- Coated non-resonant soft dome
- Powerful neodymium motor system
- Tuned closed-end transmission line chamber
- Dynamic dome stabilizer and flow resistor
- Machined aluminium faceplate
- Vented coil former
- Braided long-life silver litz wires

Specs :

Nominal Impedance	6 Ω	Free air resonance, Fs	450 Hz
DC resistance, Re	5.3 Ω	Sensitivity (2.83 V / 1 m)	94 dB
Voice coil inductance, Le	0.14 mH	Mechanical Q-factor, Qms	N/A
Effective piston area, Sd	32 cm ²	Electrical Q-factor, Qes	N/A
Voice coil diameter	60.5 mm	Total Q-factor, Qts	N/A
Voice coil height	4.0 mm	Moving mass incl.air, Mms	2.0 g
Air gap height	3 mm	Force factor, Bl	7.2 Tm
Linear coil travel, Xmax	± 0.5 mm	Equivalent volume, Vas	- liters
Magnetic flux density	1.28 T	Compliance, Cms	- mm/N
Magnet weight	- kg	Mechanical loss, Rms	- kg/s
Net weight	- kg	Rated power handling	- W

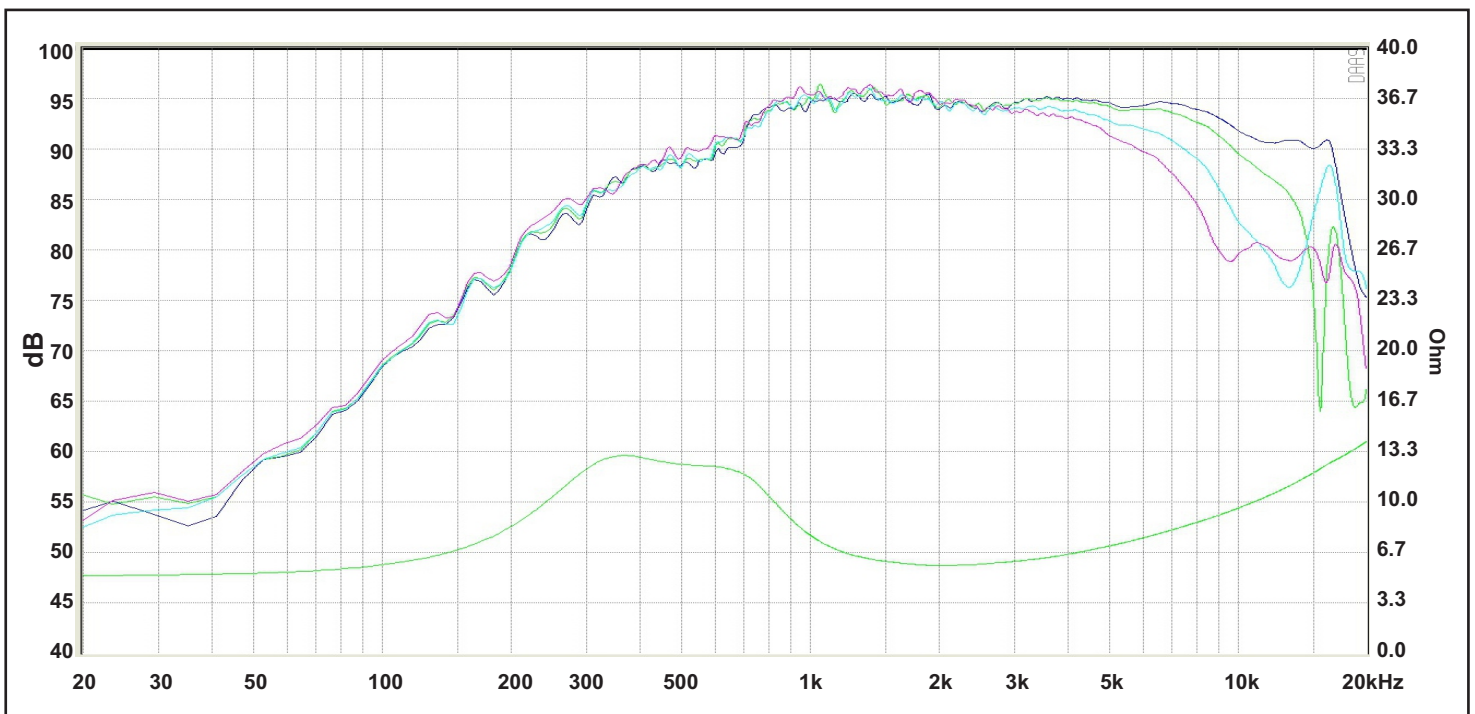

Response Curve :

— (Blue) : on axis

— (Green) : 15° off-axis

— (Red) : 30° off-axis

— (cyan) : 45° off-axis

REV.0 (20.06.2019)