

### FEATURES

- Vented aerodynamic cast aluminium chassis for optimum strength and low compression
- Proprietary cone material with EGYPTIAN PAPYRUS™ fibres made in-house
- Soft low damping rubber surround for optimum transient response
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and reduced distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires attached 180° apart for improved stability
- Vented pole piece for reduced compression
- Low piston to chassis diameter ratio
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet


### Specs :

Nominal Impedance	8 Ω	Free air resonance, Fs	29.5 Hz
DC resistance, Re	6.0 Ω	Sensitivity (2.83 V / 1 m)	89 dB
Voice coil inductance, Le	0.20 mH	Mechanical Q-factor, Qms	4.18
Effective piston area, Sd	158 cm <sup>2</sup>	Electrical Q-factor, Qes	0.32
Voice coil diameter	39 mm	Total Q-factor, Qts	0.29
Voice coil height	19.4 mm	Moving mass incl.air, Mms	16.9 g
Air gap height	6 mm	Force factor, Bl	7.7 Tm
Linear coil travel (p-p)	13.4 mm	Equivalent volume, Vas	61 liters
Magnetic flux density	1.1 T	Compliance, Cms	1.72 mm/N
Magnet weight (NEO)	0.15 kg	Mechanical loss, Rms	0.75 kg/s
Net weight	1.48 kg	Rated power handling*	70 W

\* IEC 268-5, T/S parameters measured on drive units that are broken in.

### Box recommendations :

Vented enclosure: 22 liters tuned to 36-37 Hz  
(Sealed enclosure: 14-35 liters)

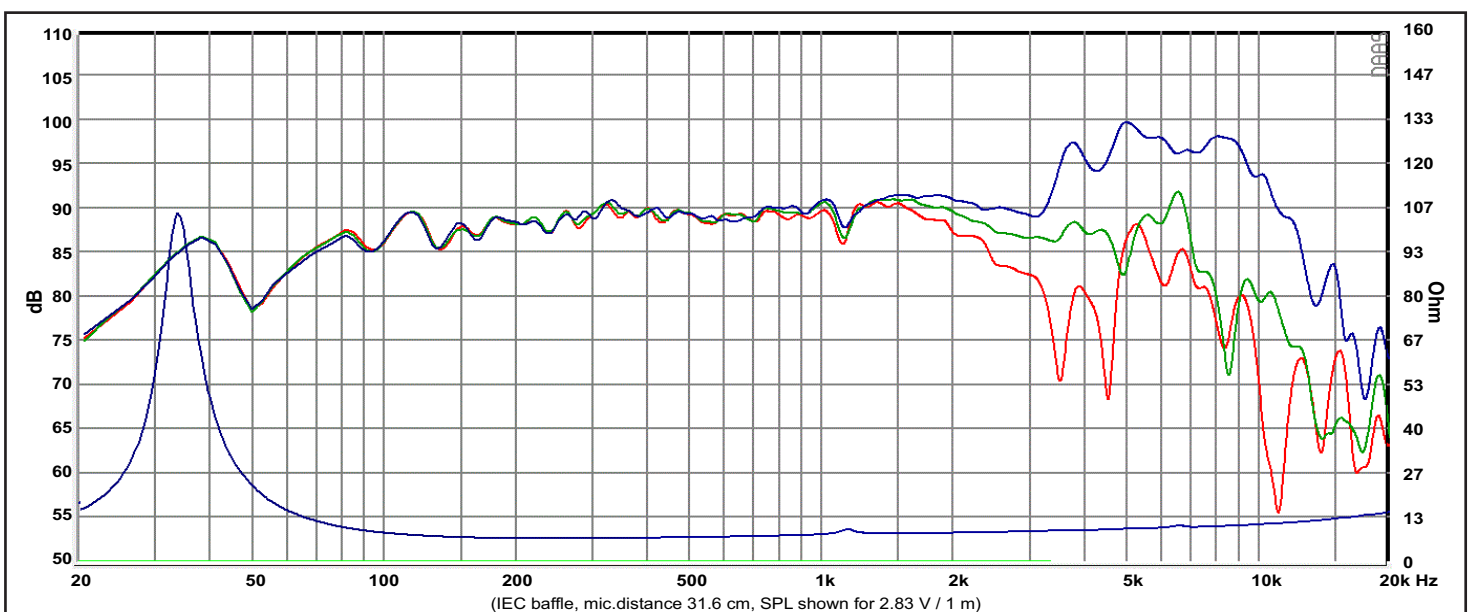

Response Curve :

— (Blue) : on axis      — ( Green ) : 30° off-axis      — (Red) : 60° off-axis

REV. 3 (06.02.2021)