


HQ-BOBBIN STYLE CORE INDUCTORS



Copper Wire Ø:	0.85 - 1.60 mm
CU Purity:	> 99.99 %
Wire Bonding Length:	10/ 40/ 50 mm
Tin Coated Length:	9/ 35/ 45 mm
Core Material:	HQ - Soft Ferrite
L-tolerance:	± 5 %
L-Value:	Nom. 25° C and 1 kHz

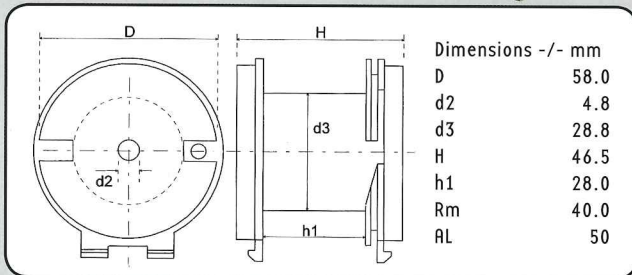

HQ 58/46

HQ 58/46 • CU 1.60 mm • Cross-Section 2.01 mm² AWG 14

Description	L/mH	R/0hm	Order Number
HQ58/1.5/160	1.50	0.07	134 0257
HQ58/1.8/160	1.80	0.08	134 0258
HQ58/2.2/160	2.20	0.10	134 0260
HQ58/2.7/160	2.70	0.11	134 0262

HQ 58/46 • CU 1.50 mm • Cross-Section 1.77 mm² AWG 15

Description	L/mH	R/0hm	Order Number
HQ58/3.0/150	3.00	0.13	134 0263
HQ58/3.3/150	3.30	0.14	134 0264
HQ58/3.9/150	3.90	0.15	134 0266

HQ 58/46 • CU 1.32 mm • Cross-Section 1.37 mm² AWG 16

Description	L/mH	R/0hm	Order Number
HQ58/4.7/140	4.70	0.19	134 0268
HQ58/5.6/140	5.60	0.22	134 0270

HQ 58/46 • CU 1.32 mm • Cross-Section 1.37 mm² AWG 16

Description	L/mH	R/0hm	Order Number
HQ58/6.8/132	6.80	0.26	134 0272
HQ58/8.2/132	8.20	0.30	134 0274

HQ 58/46 • CU 1.12 mm • Cross-Section 0.98 mm² AWG 17

Description	L/mH	R/0hm	Order Number
HQ58/10/112	10.0	0.40	134 0276
HQ58/12/112	12.0	0.45	134 0278
HQ58/15/112	15.0	0.57	134 0279