


### FEATURES

- Beryllium dome for non-resonant high frequency extension
- Dual balanced compression chambers for improved dynamics
- Dual copper caps for absolute minimum voice coil inductance and minimum phase shift
- High saturation neodymium motor system with T-shaped pole piece for lower distortion
- Non-reflective cast aluminium chamber with optimized damping for improved dynamics
- Shallow flow optimized magnet structure for optimum coupling to rear chamber
- CCAW voice coil for low moving mass
- Long life silver lead wires
- Low resonance frequency for extended range
- Solid aluminium waveguide
- Controlled directivity
- Adapter ring for bolt-less mounting to driver

### Specs :

Nominal Impedance	4 Ω	Free air resonance, F <sub>s</sub>	700 Hz
DC resistance, R <sub>e</sub>	3.0 Ω	Sensitivity (2.83 V / 1 m)	97 dB
Voice coil inductance, L <sub>e</sub>	0.02 mH	Mechanical Q-factor, Q <sub>ms</sub>	2.1
Effective piston area, S <sub>d</sub>	9.6 cm <sup>2</sup>	Electrical Q-factor, Q <sub>es</sub>	0.60
Voice coil diameter	29.0 mm	Total Q-factor, Q <sub>ts</sub>	0.46
Voice coil height	2.0 mm	Force factor, B <sub>l</sub>	3.1 Tm
Air gap height	3 mm	Rated power handling*	80 W
Linear coil travel (p-p)	1.0 mm	Magnetic flux density	1.5 T
Moving mass incl. air, M <sub>ms</sub>	0.46 g	Magnet weight	0.1 kg
		Net weight	0.63 kg

\* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct

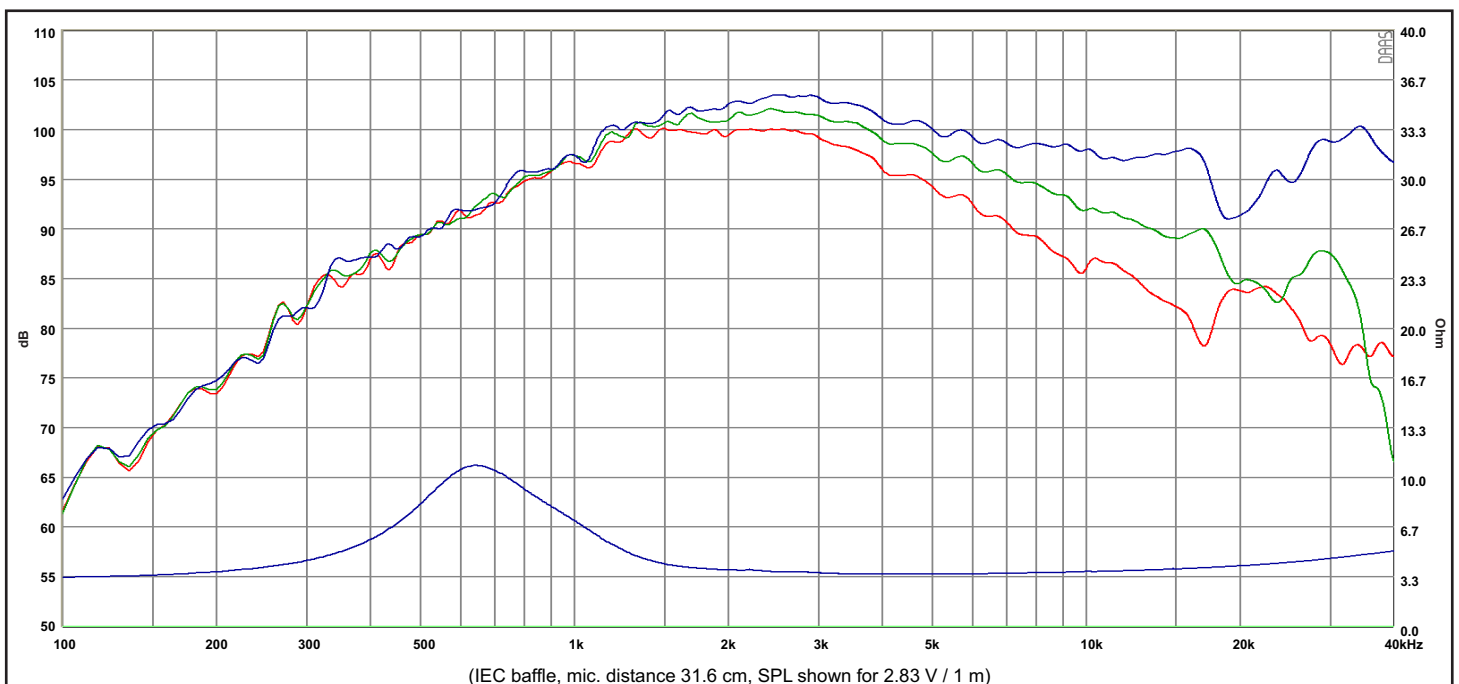

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis

REV.2 (22.10.2020)