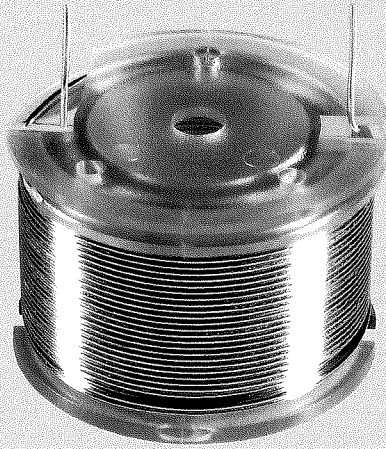
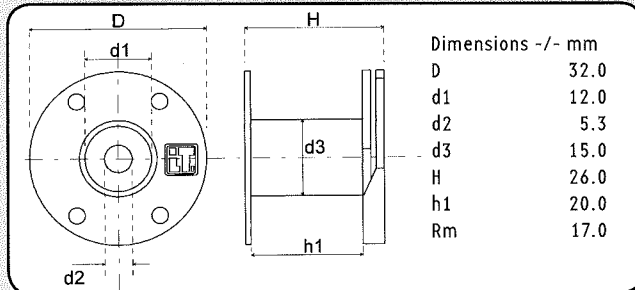



**AIR CORE CONDUCTORS TSC (TRUE SILVER COIL)**


Wire Coil:  
Copper Wire:  
Coil:  
L-Value:  
Material of inductor body:  
Length of connection:  
Peel off length:

Copper spring, silver-plated  
Thermoplastic Wire  
backed vibration-free  
Nom. 25°C and 1 kHz  
transparent polycarbonate  
min 10 mm  
9 mm


**LU 32/26**
**Air Core Conductors TRUE SILVER COIL 32/26**
**AWG 20**

Description	L/mH	Draht Ø	R/0hm	Order Number
LUT 32/26-Ag.	0.05	0.80	0.14	1501310
LUT 32/26-Ag.	0.10	0.80	0.21	1501311
LUT 32/26-Ag.	0.12	0.80	0.23	1501312
LUT 32/26-Ag.	0.15	0.80	0.26	1501313
LUT 32/26-Ag.	0.18	0.80	0.28	1501314
LUT 32/26-Ag.	0.22	0.80	0.32	1501315
LUT 32/26-Ag.	0.24	0.80	0.33	1501316
LUT 32/26-Ag.	0.27	0.80	0.35	1501317
LUT 32/26-Ag.	0.30	0.80	0.37	1501318
LUT 32/26-Ag.	0.33	0.80	0.39	1501319
LUT 32/26-Ag.	0.36	0.80	0.40	1501320
LUT 32/26-Ag.	0.39	0.80	0.43	1501321
LUT 32/26-Ag.	0.47	0.80	0.47	1501322
LUT 32/26-Ag.	0.51	0.80	0.49	1501323
LUT 32/26-Ag.	0.56	0.80	0.52	1501324
LUT 32/26-Ag.	0.68	0.80	0.60	1501325

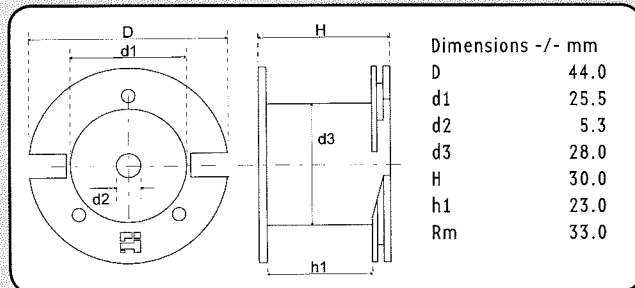
**LU 44/30**
**Air Core Conductors TRUE SILVER COIL 44/30**
**AWG 20**

Description	L/mH	Draht Ø	R/0hm	Order Number
LUT 44/30-Ag.	0.75	0.80	0.65	1501326
LUT 44/30-Ag.	0.82	0.80	0.68	1501327
LUT 44/30-Ag.	0.91	0.80	0.73	1501328
LUT 44/30-Ag.	1.00	0.80	0.77	1501329
LUT 44/30-Ag.	1.10	0.80	0.80	1501330
LUT 44/30-Ag.	1.20	0.80	0.85	1501331
LUT 44/30-Ag.	1.30	0.80	0.87	1501332
LUT 44/30-Ag.	1.50	0.80	0.94	1501333