

LUCIDA®

SURFACES

setting life's stage™



MaxCore™
DECO

MaxCore™
ULTRA

MaxCore™
DECO

MaxCore™
TERRA

MaxCore™
MONO

MaxCore™
PRO

A stage is as sound as its foundation, as strong as its core and as stylish as its surface.



Urethane with Ceramic Bead Finish

2x-4x UV coat plus ceramic bead finish for super-max strength and quality.

4X

EnCore™

EnCore™ Technology is a bespoke surface because a symphony is as memorable as its finish.



Abrasion and Stain Resistant

20-28 MIL hardened vinyl wear layer provides excellent resistance to abrasive scuffs and stains.



Decorative HD Film & Texture

High definition film prints create vivid, natural hardwood look. Matching texture contributes to abrasion resistance.

CorePrit™

CorePrit™ Technology is a white limestone core essence that is the spine of our product.



100% Virgin Premium SPC

(Stone Polyvinyl Composite)
100% phthalate-free extruded closed-cell core provides exceptional rigidity, dimensional stability, and anti-telegraphing performance.



Unilin® Locking System


The industry's strongest and most innovative drop and lock system enables quick, easy, hassle-free installation.



Anti-microbial.



IXPE Quiet sound reduction underlayment

Minimizes impact and transmitted sound, provides underfoot warmth and comfort.

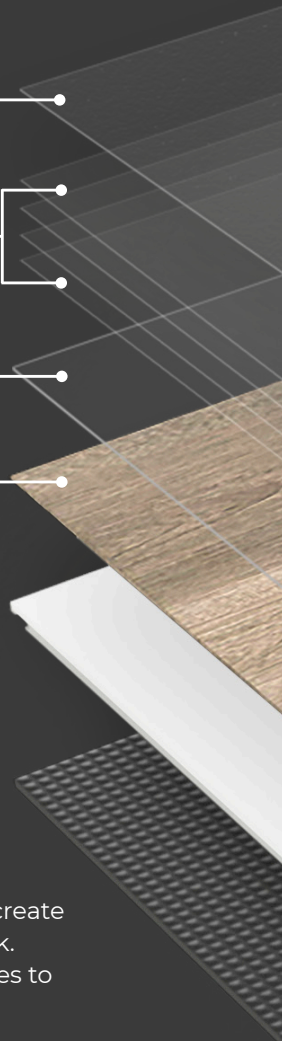

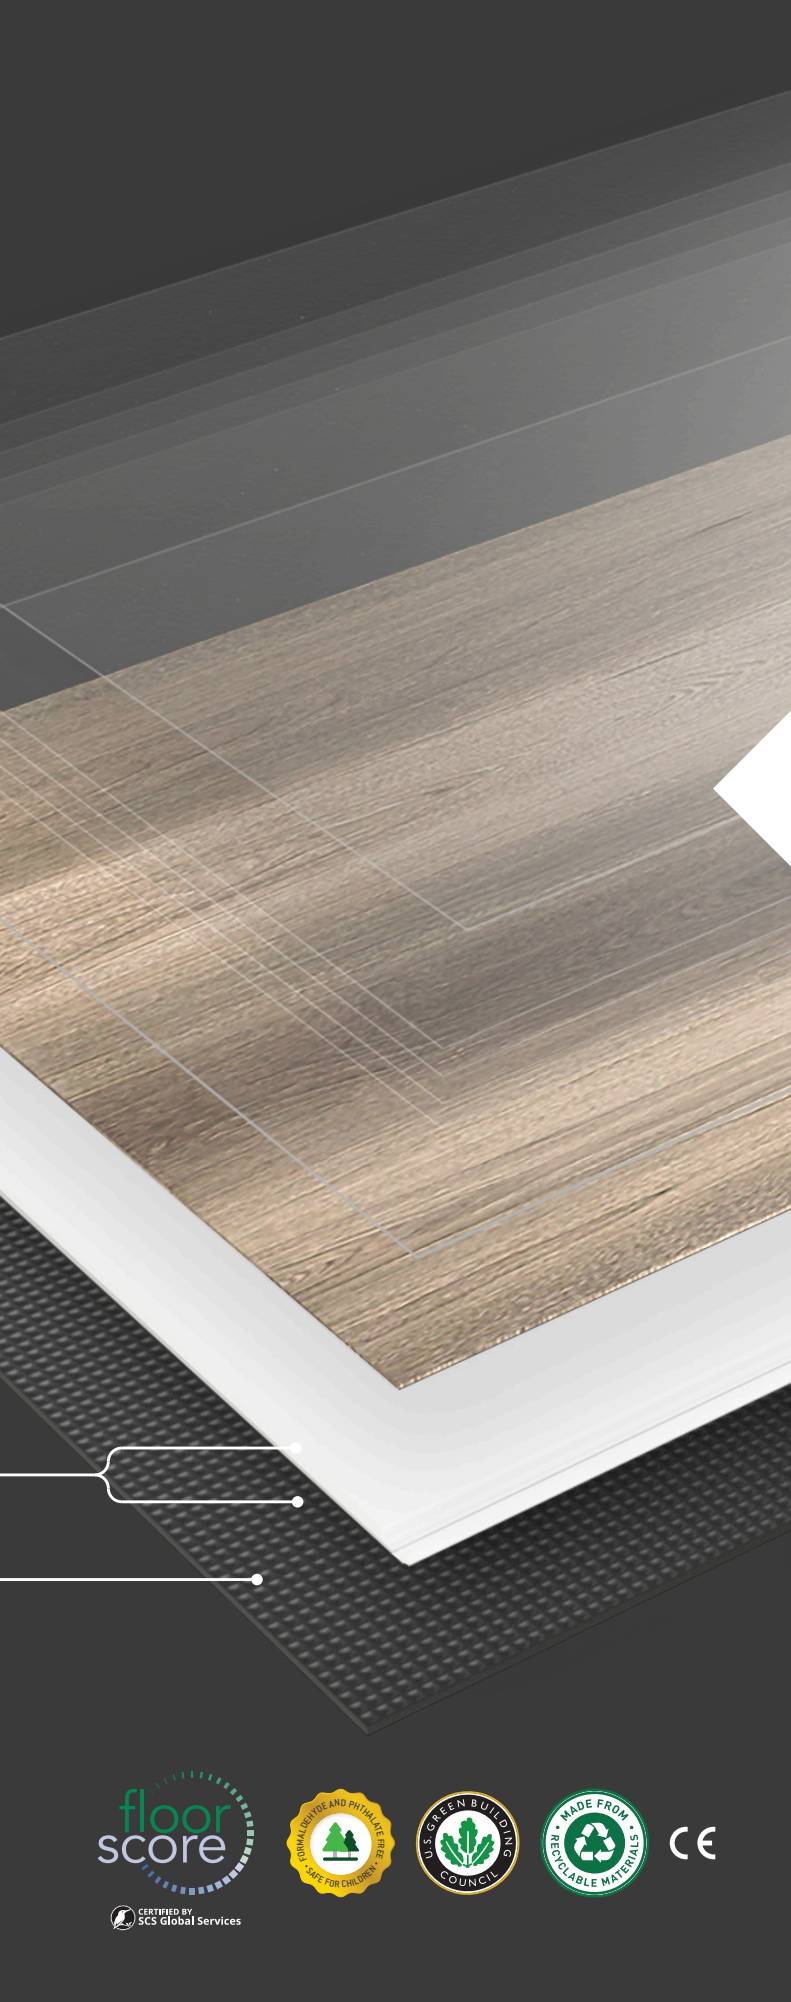

Drop & Lock Flooring

Experience the industry's strongest technology and easiest installation.



Commercial Grade

Approved for all healthcare, institutional, and educational facilities.



100% Waterproof

Rigid Core Performance



25 Year Warranty

10 Years Commercial



CERTIFIED BY
SCS Global Services



702 in Peak Shine



MaxCore™
DECO

MaxCore™ DECO

Building on the industry-leading MaxCore™ 3rd gen. platform, MaxCore™ Deco emerges with unique flooring configurations that allow for Chevron, Parquet, and Herringbone designs.



Multidirectional

Plank Size: W: 5.1" x L: 25.4" x D: .27"

Wear Layer: 22 MIL

Texture: Woodgrain



701 | White Oak

Art deco, artful, decorative, the Jazz Age.



MaxCore™
DECO

Multidirectional



702 | Peak Shine

The tune is familiar, the rhythm is unexpected.



703 | Soft Gray

Like a business casual suit, perfect for weekend meetings.



701



702



703



Chevron

Plank Size: W: 18" x L: 53" x D: 27"

Wear Layer: 22 MIL

Texture: Woodgrain



MaxCore™
DECO

Chevron

◀ 710 | Spiced Oak

The perfect blend of flavors, with a hint of spice.



711 | Charred Oak

Dark, but always in a good mood.



710



711

MaxCore™ DECO

Index

TECHNICAL SPECIFICATIONS



100% Virgin Premium SPC
(Stone Polymer Composite)



Wear Layer
22 mil (.55 mm)



System
Unilin Locking System



IXPE Quiet sound reduction underlayment
Minimizes impact and transmitted sound, provides underfoot warmth and comfort.

Thickness Overall: 0.27" (7mm)
Wear Layer: 0.55 mm (22mil)

Profile Micro-Bevel Edges

Type & Composition: 100% Virgin Premium SPC

Application: Residential & Commercial

Surface Treatment: 4x UV Coating, anti-microbial embedded with Ceramic bead Finish

Visual Repeat: Approx. every 1,200mm (39.37in)

Print Repeat: Approx. 1 plank in every 10 boxes

Backing: IXPE Moisture Resistant, Sound Reducing material

Warranty: 10 Year Limited Commercial
25 Year Limited Residential



Multidirectional/Chevron



Box 16 14.5
planks sq ft

Pallet 50 725
boxes sq ft

Width 5.1" (129.5mm)

Length 25.4" (645mm)

Thickness 0.27" (7mm)

Texture Woodgrain




701 | White Oak




702 | Peak Shine



703 | Soft Gray



710 | Spiced Oak



711 | Charred Oak

Box 4 26.5
planks sq ft

Pallet 43 1,139.5
boxes sq ft

Width 18" (450mm)

Length 53" (1340mm)

ITEM	SPECIFICATION
------	---------------

TECHNICAL SPECIFICATIONS

Dimensions	Plank: Width: 5.1" (129.5mm) Length: 25.4" (645mm) Chevron Plank: Width: 18" (452mm) Length: 53" (1232mm)
Thickness	Overall: 0.27" (7mm) Wear Layer: 0.55 mm (22mil)
Profile	Micro-Bevel Edges
Coverage	Planks: 14.5 sq.ft (1.35 sq.m) per box, 725 sq. ft (67 sq.m) per pallet Chevron Planks: 26.5 sq.ft (2.46 sq. m) per box, 1,139.5 sq.ft (105.86 sq. m) per pallet
Planks per Box	Planks: 16 Planks Chevron Planks: 4 Planks
Boxes per Pallet	Planks: 50 Boxes Chevron Planks: 43 Boxes
Weight	Planks: 30.6 lbs. (13.9 kg) per box, 1,530 lbs. (695 kg) per pallet Chevron Planks: 58 lbs. (26.3 kg) per box, 2,494 lbs. (1131 kg) per pallet
Composition	100% Virgin Premium SPC (Stone Polyvinyl Composite)
Type	Floating-floor with easy-install industry-leading UNilin™ Locking System
Application	Residential & Commercial
Surface Treatment	4x UV Coating, Anti-Microbial Embedded with Ceramic bead Finish
Visual Pattern Repeat	Approx. every 1,200mm (39.37in)
Print pattern repeat	Approx. 1 plank in every 10 cartons
Backing	Moisture Resistant
Warranty	10 Year Limited Commercial 25 Year Limited Residential

PERFORMANCE

Classification	EN ISO 10582	Slip Resistance — Dry	EN 13893	Surpasses	
	Domestic	Heavy Class 23			
	Commercial	Very Heavy Class 34	Din 51130	Surpasses	
Size & Straightness	EN 426	Passes	Chemical Resistance	EN 423	No Effect
	EN 428	Passes	Reaction To Fire	EN 13501-1	Bfl-S1 Classification
	EN 434	Surpasses	100% Phthlate Free		Yes
Thickness	EN 435	Passes	100% Waterproof		Yes
Dimensional Stability	EN 433	Surpasses	Antimicrobial		Yes
Flexibility	ISO 4918	Passes	Environmental Certification		Floorscore Certified
Residual Stability	ISO 105-B02	Surpasses	Scratch/Abrasion		Excellent
Castor Chair	Reach Svhc 163	Passes	Slip Resistance		Class Ds
Color Fastness To Light	EN 717-1	0 Mg/M	lic (Impact Isolatn Class)	Impact Sound Absorption	72 Db
Product-Content Safety			STC (Sound Transmission Class)	Traveling Sound Absorption	71 Db
Formaldehyde Emission					

