



التراليت
ULTRALIGHT

LED LIGHT BULB

UTLPLC1000 | SERIES

10W

Instant Full Light
Mercury Free 100%


Benefits

- Polycarbonate Housing.
- Suitable for Different Application.
- Easy to Install.
- Indoor Use.

Features

- Long Lifespan up to 30000 Hrs.
- From -20° to 40° celsius operating temperature.
- Color Rendering Index >80.
- G24d-3 Bulb Base.
- Opal Polycarbonate Diffuser.
- E27 Bulb Base.
- Saso Grade B.
- Mercury Free 100%.

Characteristics




G24d-3 Bulb Base



Instant Full Light



E27 Bulb Base



G24d-3 Bulb Base



E27 Bulb Base



| Technical Operating & Electrical Data

Input Voltage : Frequency	100-240VAC 50/60Hz
Rated Color Rendering Index	80
Beam Angle	120°
Life Span	30000Hrs
Displacement	0.9
Operating Temperature	-20° to 40°
Switching Cycles	15000
Protection Class	-


| Mechanical Data

Housing Material	Polycarbonate
Cover Material	Opal Polycarbonate
Available Colors	White
Light Bulb Base	E27, G24d3-

| Areas Of Application



Public Indoor



Hospital



Shopping Center



Commercial



WorkPlace



Education Center




| Specifications

Model No	Power	CCT	Luminous	Efficicacy	PF	Current
UTLPLC1000-E27	10W	2700K	1000Lm	100	0.4548	94mA
UTLPLC1000-E27	10W	5000K	1100Lm	110	0.4554	94mA

| Dimensions

No	Model No	Light Bulb Base	Length	Width	Height	Weight
1	UTLPLC1000	E27	34mm	34mm	160mm	78g

| Product Dimensions

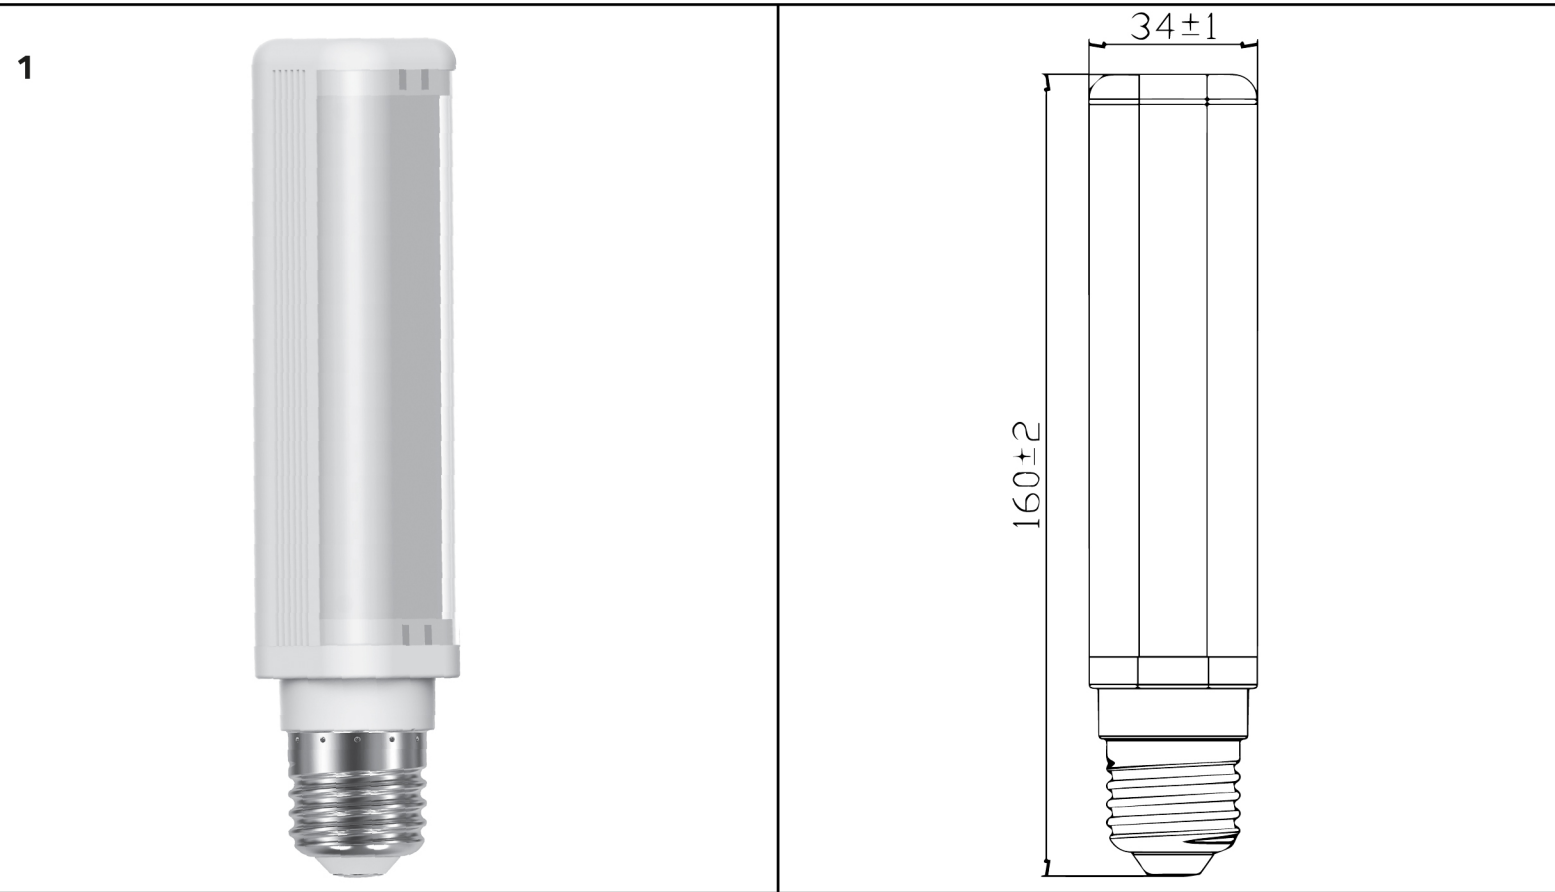

| Specifications

Model No	Power	CCT	Luminous	Efficiency	PF	Current
UTLPLC1000-G24D-3	10W	2700K	1000Lm	100	0.4548	94mA
UTLPLC1000-G24D-3	10W	3000K	1000Lm	100	0.4548	94mA
UTLPLC1000-G24D-3	10W	4000K	1100Lm	110	0.4554	94mA
UTLPLC1000-G24D-3	10W	5000K	1100Lm	110	0.4554	94mA
UTLPLC1000-G24D-3	10W	6500K	1100Lm	110	0.4554	94mA

| Dimensions

No	Model No	Light Bulb Base	Length	Width	Height	Weight
1	UTLPLC1000	G24D-3	34mm	34mm	154mm	78g

| Product Dimensions

