



FEATURES



- 3-Step MacAdam
- One LED Bin supply
- High Density LED for uniform output
- 50,000h Long-Life LED
- Available in both IP20 & IP65
- Versatile application with LED Profile (sold separately)
- DC24V LED Strip
- DALI DT8 Colour Tuneable



Neon Flex Series

LUMINAIRE SPECIFICATION

SKU	SIZE	WATTAGE
TN-DEIM	6x12mm	5W, 10W
Colour Temperature	2700K, 3000K, 4000K, 2700K-6000K	
Cutting Size	50mm	
IP Rating	IP67	
Bending Type	Horizontal	
Voltage	24V	
Dimming	DALI	
Efficiency (lm/w)	27-36lm/w	
CRI	90	


ORDER INFORMATION

	Output	Bend	CT	Cable
TN-DEIM	5W 10W	Horizontal	2700K	Front
			3000K	Side
			4000K	Bottom
			Tunable	

MOUNTING OPTIONS


Aluminium Profile

Available in 1m, 2m & 3m lengths



Stainless-Steel Clips

0.8mm Wide Mounting Clips



CABLE FEED OPTIONS



Front Cable Entry




Side Cable Entry





Bottom Cable Entry

DIMENSION SPECIFICATION



Min bending diameter

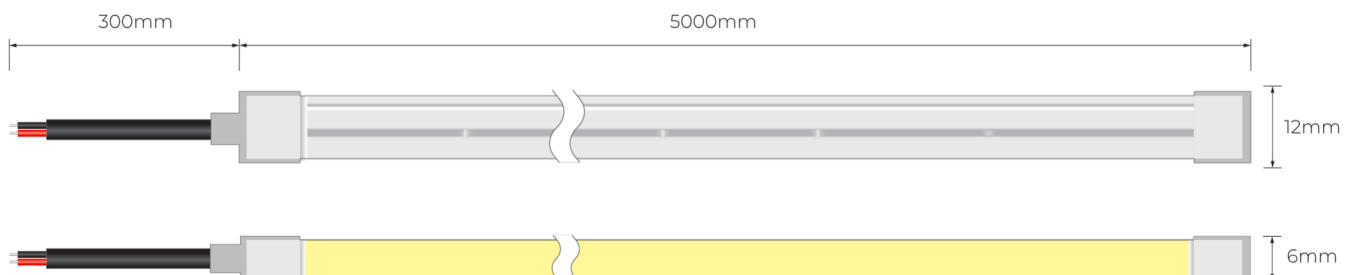Unit: mm
Cross section

STANDARDS COMPLIANCE

EN61347-1 • EN61347-2-13 • EN62384
EN55015 • EN61000-3-2 • EN61000-3-3 • EN61000-4-2,3,4,5,6,8,11 • EN61547
IEC 62386-101 • IEC 62386-102 • IEC 62386-207 • IEC 62386-209
IEC 61347-2-13 Annex J • EN 60598-2-22 • EN 50172

5

YEARS
WARRANTY
5% FAILURE RATE



tunable | 60 Martin Place / Sydney NSW 2000 Australia

T +612 9127 7736 | E info@tunable.au | tunable.au

DATASHEET V2 01.04.25

