

PRODUCT DATASHEET



Porcelain Paving Tiles

Porcelain gives a subtle, contemporary look to any space. Ryno Porcelain is separated into two range. The elegant 'Quadro' range and the wood-grain effect 'Albero' range. Six finishes available, each protected from fading.

- 600 x 600 x 20mm as standard
- Extremely low risk of slip for optimal safety
- Non-porous: protected from staining and diminishing over time
- Frost-proof

QUADRO TILES

For a contemporary, minimalist finish




Crema



Argento



Nero

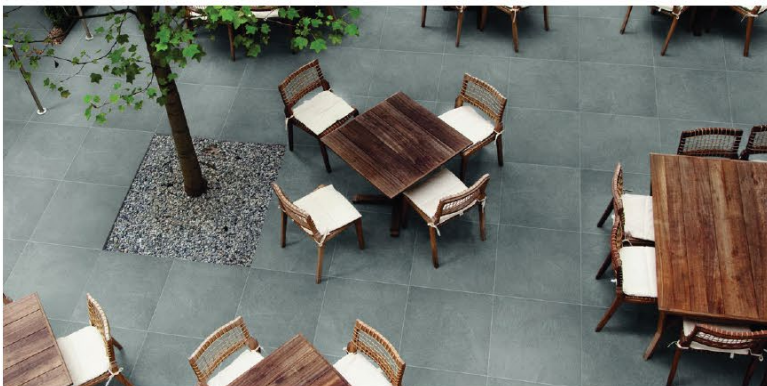

Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk

PRODUCT DATASHEET



Porcelain Paving Tiles

TECHNICAL SPECIFICATION

Physical property/Characteristic	Required test value (where appropriate)	Standard and reference test methods	Result
Abrasion resistance		Standard: BS EN 14411:2016 (European Performance Standard for Ceramic Tiles) Ref. test methods: EN ISO 10545	Passed
Acid and alkali resistance	GHA		
Breaking Strength	> 1300N		
Cracking resistance			
Flexion resistance	> 35N/mm ²		
Frost resistance			
Household chemical resistance	Min GB		
Stain resistance	Min. Class 3		
Water absorption	<0.5%		
Slip resistance - Pendulum Test Values (PTV)	36 or more ("Low risk": slip probability 1 in 1,000,000)	Standard: BS 7976-2:2002 (Pendulum Testers. Method of Operation)	71 (worst dry), 60 (worst wet) 60 (worst dry), 48 (worst wet)
Span and loading			Up to 600mm @4kNm ² and 2kN point load

RECOMMENDED SYSTEM

We recommend Quadro and Albero porcelain is installed on a RynoPaveSupport System. Each offers the strength and longevity Ryno systems are best known for.

Ask about:

- RynoTerracePave Adjustable Terrace System (IGNO)
- RynoTerracePave PaveRail™ Non-Combustible Paving System (IGNO)
- RPA Self-levelling adjustable pedestals
- RPF Fixed-head adjustable pedestals



Castlepoint
Castle Way
Ellon AB41 9RG

01358 726000
sales@rynogroup.co.uk
rynogroup.co.uk