

SINGLE CONNECTION TRIM

Fibre Cement Trim


Cladco Fibre Cement Aluminium Connection Profile Trim is designed to wraparound a single Fibre Cement Board's edge and either a soffit, window or door reveal. The Trim is often used to finish feather boarding Wall Cladding installations.

Cladco Fibre Cement Connection Profiles are manufactured with a slight lip, which perfectly fits a Cladco Fibre Cement Wall Cladding Board and can be installed using Cladco Fibre Cement 38mm Screws.

Protecting your Board's edges from the elements, the Trims also allow your Wall Cladding Board to be fitted closer to the edge of your wall.

All Cladco Fibre Cement Wall Cladding Trims are available in a range of seven colours, manufactured to match the colour of your Cladco Fibre Cement Wall Cladding Boards for an attractive and seamless design.

Trims do not require any staining or painting, and are manufactured onsite using high-quality aluminium for a stain, rust and corrosion resistant product.

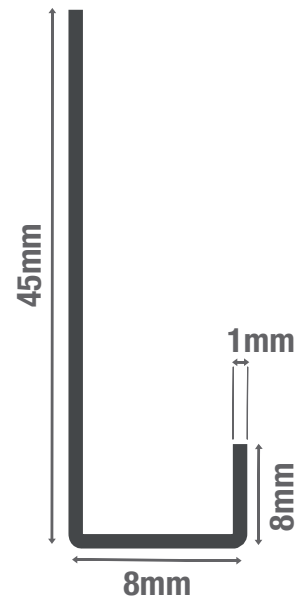

CLADCO TRIMS

SYMMETRIC EXTERNAL CORNER TRIM
Designed to fit on the corners of the building. Fibre Cement Wall Cladding Boards are installed to the flat edges of the Trim.

INTERNAL CORNER TRIM
Used in the internal corners of a building for a neat, seamless finish.

WALL END TRIM
Installed on the finishing edge to conceal exposed ends of Fibre Cement Wall Cladding Boards.

ASYMMETRIC EXTERNAL CORNER TRIM
Designed to be installed on either side of the door or window, allowing Boards to be fitted on the flat surface of the Trim.


SINGLE & DOUBLE CONNECTION TRIMS
Installed to the inside edges of window reveals and door frames to support Boards.

PERFORATED CLOSURE
Installed under the Battens at the base of the build, or at the top of any doors and windows, to ensure ventilation throughout the installation. Perforated Closure also protects the build from any dirt or insects penetrating the air flow space.

START TRIM
Installed at the start of new Board runs at the base of the building.

SPECIFICATIONS	
Length	3 metres
Thickness	1mm
Weight (approx)	1.53kg

COLOURS

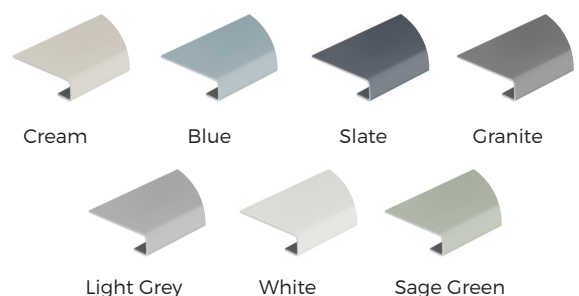

PLEASE NOTE - Images are used for illustration purposes only, actual item may vary slightly from the image supplied.



01837 659901 info@cladco.co.uk
www.cladcodecking.co.uk

Beardown Road, Exeter Road Industrial Estate, Okehampton EX20 1UA

