


Cedral Slates

Accessories: Cedral Mono Pitch Ridges 525mm

TECHNICAL
NOTE

Cr-03/11/en/v2

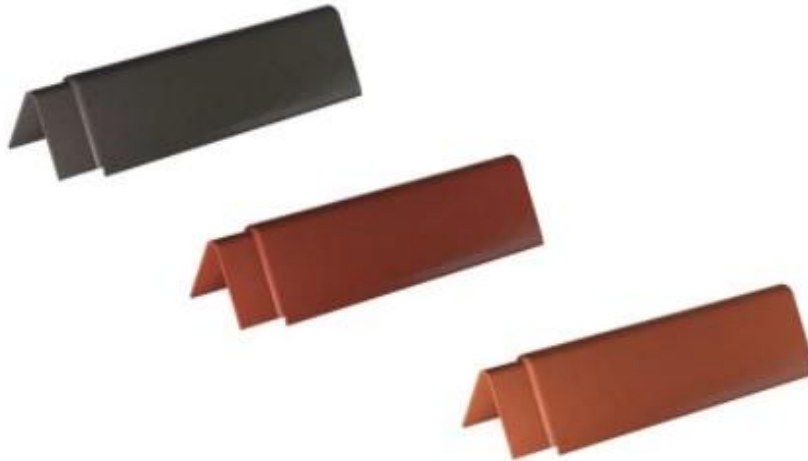

Application

Used for capping the ridge line on a mono pitch roof. Suitable for pitches from 20° up to 45°.

Material

Fibre cement manufactured to EN 492:2012 + A2:2018

Reaction to fire – A2, s1, d0 to the EN 13501-1

Supplied in three colours – Blue/Black, Russet and Terracotta

Ridge Requirement Chart

Roof Pitch	Ridge Degree Required	Stamped on Ridge
20 - 22.5	67.5	67.5
23 – 27.5	62.5	62.5
28 - 35	55	55
35.5 - 45	45	45

Disclaimer

The information in this Technical Note is correct at time issuing. However, due to our committed program of continuous material and system development we reserve the right to amend or alter the information contained therein without prior notice. Please contact your local Etex Exteriors Sales Organization to ensure you have the most current version. All figures contained in this document are illustrations and should not be used as construction drawings. This information is supplied in good faith and no liability can be accepted for any loss or damage resulting from its use.

This document is protected by international copyright laws. Reproduction and distribution in whole or in part without prior written permission is strictly prohibited. Cedral and logos are trademarks of Etex NV or an affiliate thereof. Any use without authorisation is strictly prohibited and may violate trademark laws.