


Tempest Tile 44





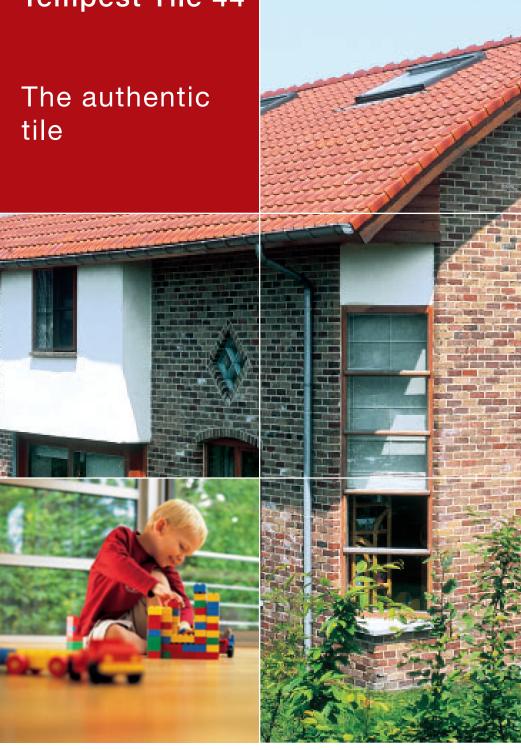

Tempest Tile 44

3 17

TECHNICAL DATA

Model Tempest Tile 44

Minimum pitch 22° Tiles/m² ± 21

> Weight/tile ± 2 kg Weight/m² ± 42 kg

Crushing strength > 1200 N (EN538)

Water impermeability ≤ 0.50 cm³/cm².d (EN539-1)

Frost resistance guarantee for 30 years Batten size

38 x 25 mm for rafters not exceeding 450 mm centres

50 x 25 mm for rafters not exceeding 600 mm centres

Nails

aluminium alloy 45 mm long, 3.35 mm diameter (BS 1202)

DIMENSIONS




Effective Cover Width

Length/Gauge 246 mm Width/Gauge 195 mm


Overall Size


Length 302 mm Width 221 mm



Manufactured to EN1304

ROOF DETAILS

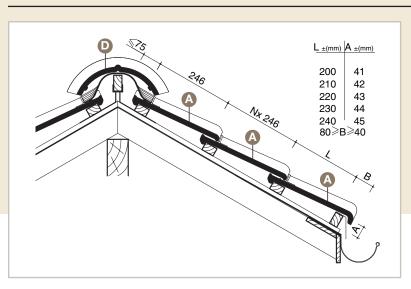






This document does not imply a contract. The colours used in this folder show the natural tint of our clay roof tiles subject to the limitations of the printing process. As clay roof tiles are natural materials, slight variations in colour may occur between batches of tiles, we recommend that they should be taken from several pallets at the same time and mixed at random on the roof. Wienerberger reserves the right to alter the range and the technical data. Dimensions are approximate.

RIDGES AND HIP TILES














VERGE & VARIOUS FITTINGS



























Natural Red (600)

Amarant (848)

Rustic (872)







Old Copper (876)

Anthracite (736)





Wienerberger Ltd.
Koramic Clay Roof Tiles
Wienerberger House
Brooks Drive,
Cheadle Royal Business Park
Cheadle, Cheshire, SK8 3SA

T 0845 600 0051 F 0161 491 0803 koramicsales@wienerberger.com www.wienerberger.co.uk









Manufactured to BS EN 1304

