

PRODUCT DATASHEET


# Classic Composite Decking Boards

RynoTerraceDeck Classic wood-polymer composite (WPC) Decking Boards have a contemporary, grooved appearance.

- Long lasting: will not rot, warp or twist
- Non-slip and splinter-proof
- Low-maintenance: no need to treat or stain
- Manufactured from FSC® certified wood

### DECK BOARD FINISHES

- 4 distinctive colour choices available
- boards reversible, with 2 groove-spacing options

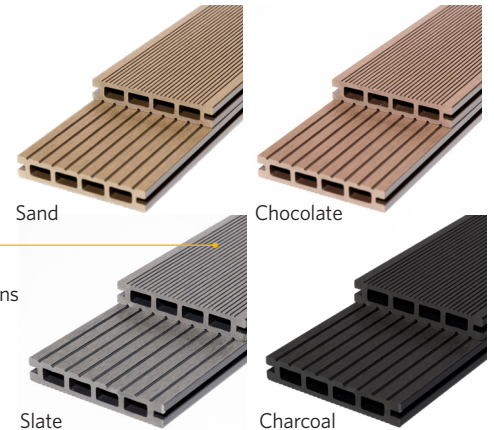

Sand

Chocolate

Slate

Charcoal

### ASSEMBLY

- Quick and simple to install
- Board dimensions 150mm x 25mm x 3m
- Joist spacing 350mm
- Hidden fixings for every application (screws included)




Metal Clasp  
(for a 4mm gap  
between boards)



Plastic T-Clip  
(for a 6mm gap  
between boards)

### RECOMMENDED SYSTEM

We recommend decking is installed on a RynoDeckSupport System.

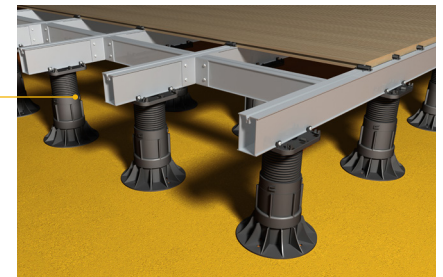

## TECHNICAL SPECIFICATION

	Test Method	Value
Density	ASTM D792-13 Method B	1.33g/cm <sup>3</sup>
Flexural Strength	ASTM D790-10 Procedure A	40.4MPa
Flexural Modulus		5240MPa
Izod Unnotched Impact Strength	ASTM D4812-11	72 J/m C(Complete break)
Shore Hardness	With ref to ASTM D2240-05 (2010)	D/72/1
Tensile Strength	ASTM D638-14	25.5MPa
Water Absorption	ASTM D570-98 (2010)	1.15%
Coefficient of linear thermal expansion (1/C °)	ASTM D696-08	-30°C-30°C: 31.85x10 <sup>-6</sup>
Slip Resistance (Narrow grooves)	BS 7976-2	PTV (Dry) 57 PTV (Wet) 43
Slip Resistance (Wide grooves)		PTV (Dry) 56 PTV (Wet) 39
Reaction to Fire	EN ISO 3501-1	C <sub>fl</sub> - s1



Castlepoint  
Castle Way  
Ellon AB41 9RG

01358 726000  
sales@rynogroup.co.uk  
rynogroup.co.uk