

TOP ABUTMENT VENTILATOR

The Sandtoft top abutment ventilation system provides a neat and discreet way of ventilating the roof space at a top abutment.

Product Technical Information Sheet

General Information

Minimum roof pitch	Suits the minimum roof pitch of all compatible tiles
Compatible flashing	WBLR, Lead
Free Vent Area	5,000 mm ² /linear metre
Fixings	A minimum of 3 fixings per unit
Size of pack	1040 x 240 x 170 mm
Component quantities	To suit 6 metres of Top Abutment
Top Abutment Ventilator material	PS and Aluminium
Screw and washer material	Stainless Steel

Tile Compatibility (Flat Tiles)

301	Calderdale Edge	Humber Plain Tile
303	Cassius	Humber Sandfaced Plain Tile
20/20	Concrete Plain Tile	Rivius
Alban Plain Tile	Dual Calderdale Edge	TLE
Barrow Plain Tile	Dual TLE	Village Plain Tile

Tile Compatibility (Profiled Tiles)*

Double Pantile	Neo Plus	Shire Pantile
Double Roman	New County	Standard Pattern
Lindum	Olympus	

Guidance

Product specification is subject to change and will be updated accordingly.

The system comprises of 1 m vent units that click together, fillers can then be attached to the vent units for profiled tiles. Once the vent units are fixed in place a WBLR or lead flashing can be dressed into place, please refer to our installation guide for more information.


The Sandtoft top abutment ventilation system provides 5000mm²/linear metre free vent area.

Contact Sandtoft technical services for further information.

Product Image



Technical Drawing

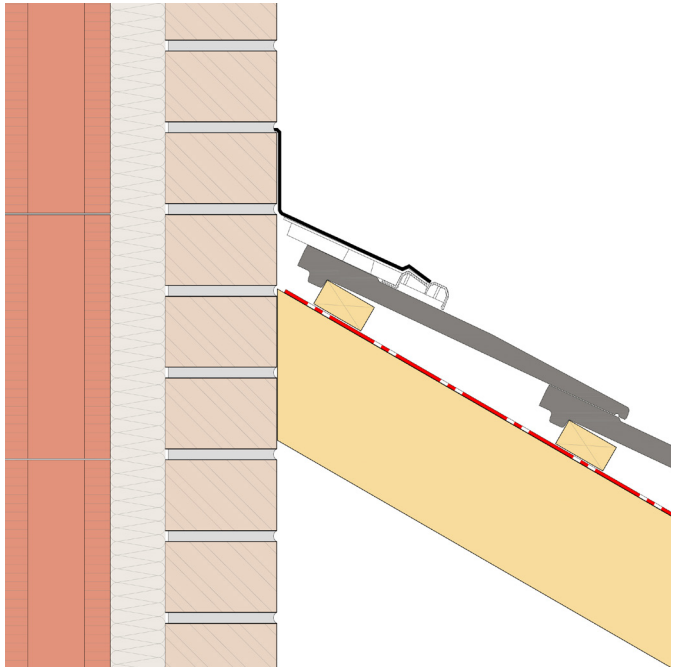

* Profile fillers are available separately.