

Chatillon® Portion Control Scales

Specification Sheet

SS-T-1109

November 2009

The CHATILLON® Tabletop Series are precision top loading scales ideal for food service operations, educational institutions, industrial applications or for the home. Scales feature a steel chrome finish with dual reading dial. Dial is easy to read with large graduations and high-contrast lines and numbers. Dial graduations in avoirdupois and metric units of measure. Scales may be supplied with a fixed, flat platter or with removable bowl.

Two styles of scales are available: temperature compensated or standard. Scale platter and bowl are Type 202 stainless steel.

Features

- Large, Easy-to-Read Dials
- Dual Reading Dial Avoirdupois and Metric
- Chrome Steel Base
- Stainless Steel Platter or Removable Bowl Models
- Temperature Compensated Models
- 1 Year Warranty



Ordering

With Flat Platter, Temperature Compensated

Model	Avoirdupois	Metric	Accuracy (±)
T10-T-F	11 lb x 1 oz	5 kg x 20 g	0.01 lb, 30 g
T20-T-F	22 lb x 1 oz	10 kg x 50 g	0.17 lb, 75 g
T30-T-F	33 lb x 2 oz	15 kg x 50 g	0.17 lb, 75 g
T40-T-F	44 lb x 2 oz	20 kg x 50 g	0.17 lb, 75 g

With Scoop, Temperature Compensated

Model	Avoirdupois	Metric	Accuracy (±)
T10-T-S	11 lb x 1 oz	5 kg x 20 g	0.01 lb, 30 g
T20-T-S	22 lb x 1 oz	10 kg x 50 g	0.17 lb, 75 g
T30-T-S	33 lb x 2 oz	15 kg x 50 g	0.17 lb, 75 g
T40-T-S	44 lb x 2 oz	20 kg x 50 g	0.17 lb, 75 g

With Bowl, Temperature Compensated

Model	Avoirdupois	Metric	Accuracy (±)
T10-T-B	11 lb x 1 oz	5 kg x 20 g	0.01 lb, 30 g
T20-T-B	22 lb x 1 oz	10 kg x 50 g	0.17 lb, 75 g
T30-T-B	33 lb x 2 oz	15 kg x 50 g	0.17 lb, 75 g
T40-T-B	44 lb x 2 oz	20 kg x 50 g	0.17 lb, 75 g

With Flat Platter

Model	Avoirdupois	Metric	Accuracy (±)
T10-X-F	11 lb x 1 oz	5 kg x 20 g	0.2 lb, 100 g
T20-X-F	22 lb x 1 oz	10 kg x 50 g	0.4 lb, 200 g
T30-X-F	33 lb x 2 oz	15 kg x 50 g	0.4 lb, 200 g
T40-X-F	44 lb x 2 oz	20 kg x 50 g	0.4 lb, 200 g
T60-X-F	66 lb x 4 oz	30 kg x 100 g	0.4 lb, 200 g
T110-X-F	110 lb x 8 oz	50 kg x 200 g	0.9 lb, 400 g
T130-X-F	132 lb x 8 oz	60 kg x 200 g	0.9 lb, 400 g

With Scoop

Model	Avoirdupois	Metric	Accuracy (±)
T10-X-S	11 lb x 1 oz	5 kg x 20 g	0.2 lb, 100 g
T20-X-S	22 lb x 1 oz	10 kg x 50 g	0.4 lb, 200 g
T30-X-S	33 lb x 2 oz	15 kg x 50 g	0.4 lb, 200 g
T40-X-S	44 lb x 2 oz	20 kg x 50 g	0.4 lb, 200 g
T60-X-S	66 lb x 4 oz	30 kg x 100 g	0.4 lb, 200 g
T110-X-S	110 lb x 8 oz	50 kg x 200 g	0.9 lb, 400 g
T130-X-S	132 lb x 8 oz	60 kg x 200 g	0.9 lb, 400 g

With Bowl

Model	Avoirdupois	Metric	Accuracy (±)
T10-X-B	11 lb x 1 oz	5 kg x 20 g	0.2 lb, 100 g
T20-X-B	22 lb x 1 oz	10 kg x 50 g	0.4 lb, 200 g
T30-X-B	33 lb x 2 oz	15 kg x 50 g	0.4 lb, 200 g
T40-X-B	44 lb x 2 oz	20 kg x 50 g	0.4 lb, 200 g

Quality Assured.

AMETEK® | **Chatillon®**
Precision Weighing

Ordering

Optional Accessories

Part No.	Description
SPK-T-Bowl	Stainless Steel Bowl
SPK-T-ADP	Bowl Attachment Adapter
SPK-T-Scoop	Scoop and Attachment Assembly
5400	Removable Scoop
19173	Scoop Attachment

Specifications

Accuracy: See Tables

Safe Overload: 105% of rated capacity

Ultimate Overload: 105% of rated capacity

Display: Dual Reading

Operating Temperature: 32° to 104°F (0° to 40°C)

Storage Temperature: -4° to 104°F (-20° to 40°C)

Instrument Weights: See Table

Shipping Weight: See Table

Note: Weights are approximate.

Standard Accessories

Stainless Steel Bowl and Adapter (Model dependent)


Stainless Platter (Model dependent)

Stainless Steel Scoop (Model dependent)



Shown: SPK-T-Scoop assembly.

Dimensions

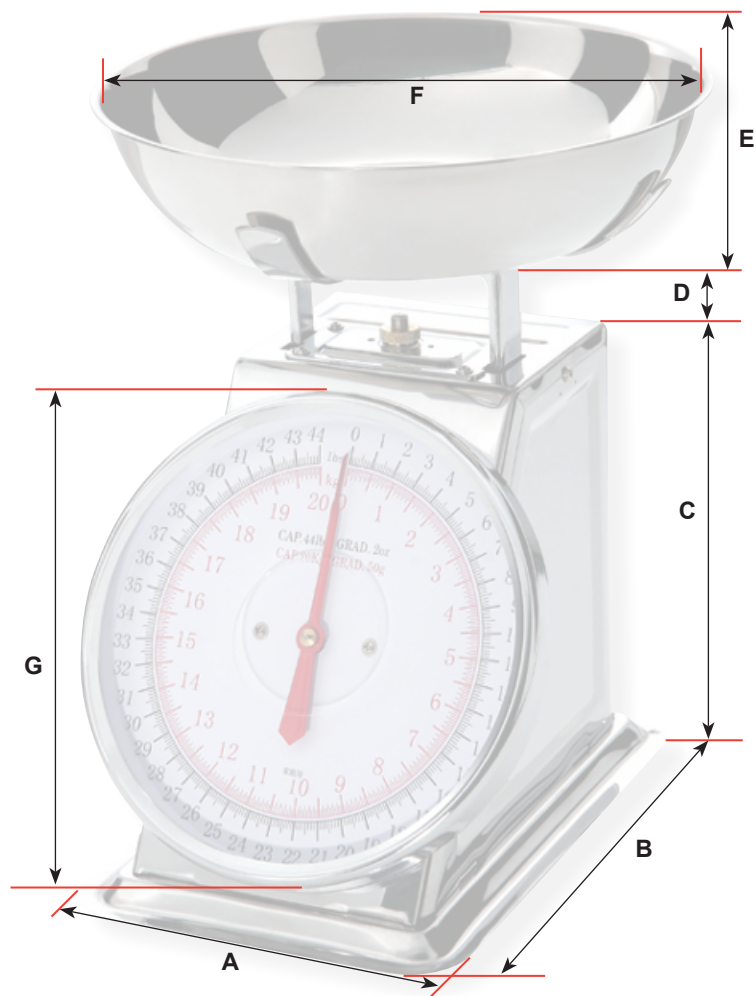

Scale Weights

Model	Weight	Ship Weight
T10	7.2 lb, 3.3 kg	8 lb, 3.6 kg
T20	7.2 lb, 3.3 kg	8 lb, 3.6 kg
T30	7.2 lb, 3.3 kg	8 lb, 3.6 kg
T40	7.2 lb, 3.3 kg	8 lb, 3.6 kg
T60	12.5 lb, 5.7 kg	13 lb, 5.9 kg
T110	12.5 lb, 5.7 kg	13 lb, 5.9 kg
T130	12.5 lb, 5.7 kg	13 lb, 5.9 kg

Weights are approximate.

Platter Dimensions

Model	Dimension
T10	5 ^{3/4} x 5 ^{3/4} in (146 x 146 mm)
T20	5 ^{3/4} x 5 ^{3/4} in (146 x 146 mm)
T30	5 ^{3/4} x 5 ^{3/4} in (146 x 146 mm)
T40	5 ^{3/4} x 5 ^{3/4} in (146 x 146 mm)
T60	9 x 9 in (229 x 229 mm)
T110	9 x 9 in (229 x 229 mm)
T130	9 x 9 in (229 x 229 mm)

Dimensions

Ref	Dimension
A	7 in (177.8 mm)
B	10 ^{1/8} in (257.2 mm)
C	8 ^{1/8} in (206.4 mm)
D	1 ^{3/4} in (44.5 mm)
E	1 ^{3/4} in (45.1 mm)
F	10 ^{1/4} in (260.4 mm)
G	8 in (203.2 mm)

AMETEK

MEASUREMENT & CALIBRATION TECHNOLOGIES

Americas
AMETEK
Measurement & Calibration
Technologies
8600 Somerset Drive
Largo, Florida 33773
United States of America
Tel +1-727-536-7831
Tel +1-800-527-9999
Fax +1-727-539-6882
Email chatillon.fl-lar@ametek.com

United Kingdom
Lloyd Instruments Ltd.
Steyning Way
Bognor Regis
West Sussex
PO22 9ST
United Kingdom
Tel +44 (0) 1243 833 370
Fax +44 (0) 1243 833 401
Email uk-far.general@ametek.co.uk

France
AMETEK S.A.S.
Rond Point de l'Épine des Champs
Buro Plus - Bat. D
78990 Elancourt
France
Tel +33 (0)1 30 68 89 40
Fax +33 (0)1 30 68 89 49
Email general@lloyd-instruments.com

Germany
AMETEK GmbH
Rudolf-Diesel-Strasse 16
D-40670 Meerbusch
Germany
Tel +49 (0) 2159 9136-70
Fax +49 (0) 2159 9136-39
Email info@ametek.de

Singapore
AMETEK Singapore Pvt. Ltd.
10 Ang Mo Kio Street 65
#05-12 Techpoint
Singapore 569059
Tel +65-6484-2388
Fax +65-6481-6588
Email aspl@ametek.com.sg

Visit Us on the Worldwide Web at:
www.chatillon.com

© 2009 by AMETEK, Inc.

Information within this document is subject to change without notice.



ISO 9001/2000
ISO/IEC 17025
Manufacturer