




Decorative Lighting Position Guide

*Decorative and Post Top Light fixtures for
EVERY mounting height and application*

- Exceptional styling, energy efficiency and state of the art controls
- Precision optical distributions without sacrificing visual comfort
- Mounting versatility and wide range of sizes and lumen packages

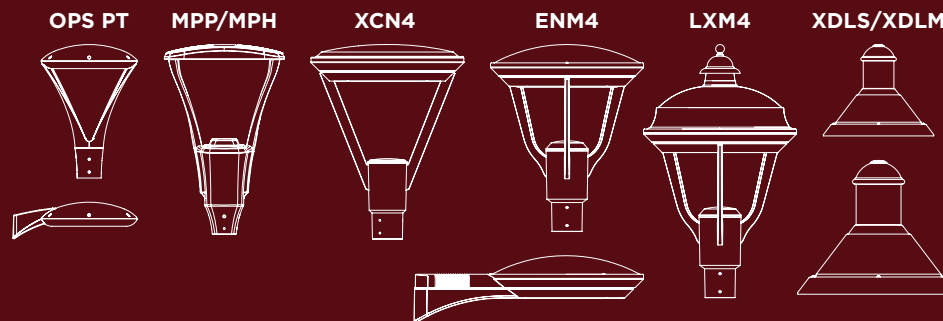

Decorative Lighting Position Guide

							
	Opulence (OPS PT)	Mirada (MPP/MPH)	Constitution (XC�4)	Enterprise (ENM4)	Lexington (LXM4)	LifeStyle Small (XDLS)	LifeStyle Medium (XDLM)
	★★★★	★★★★★	★★★★	★★★★	★★★★	★★★★	★★★★
Markets	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Automotive, Grocery & Pharmacy, Parking Lot/Garage, Petroleum, QSR, Retail, Warehouse	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail	Grocery & Pharmacy, Parking Lot/ Garage, Petroleum, QSR, Retail
Size L x W x H (in)	16 x 16 x 22	20 x 20 x 33	25 x 25 x 32	25 x 25 x 31	25 x 25 x 42	18 x 18 x 15	28 x 28 x 22
Weight (lbs)	25	55 / 60	45	64	64	25	36
Typical Mounting Height (ft)	10 - 20	15 - 40	15 - 25	15 - 25	15 - 25	10 - 20	15 - 25
Mounting	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	2-3/8" - 3" OD Tenon, Twin Post, Wall Bracket	B3 Side Arm, 4" OD Pole/Tenon, Wall Bracket	B3 Side Arm, 4" OD Pole/Tenon
High Voltage (347-480V)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Lumen Range	3,000 - 17,000*	10,000 - 72,000*	5,000 - 25,000*	5,000 - 25,000*	5,000 - 25,000*	3,000 - 17,000*	5,000 - 25,000*
LPW Range	114 - 148	112 - 156	132 - 161	100 - 139	100 - 140	109 - 164	120 - 159
Lens/Optics	Acrylic (PC Option)	One Piece Silicone	One Piece Silicone	One Piece Silicone	One Piece Silicone	Acrylic (PC Option)	One Piece Silicone
Distributions	Type 3W, 4F, 5C, 5Q, 5R, 5D, AD	Type 2, 3, FT, 5W, FTA, AM, CT	Type 2, 3, FT, 5W	Type 2, 3, FT, 5W	Type 2, 3, FT, 5W	Type 3W, 4F, 5C, 5Q, 5R, 5D, AD	Type 2, 3, FT, 5W
Shielding	External Shields	Integral Full & Half Louver	Integral Full Louver	Integral Full Louver	Integral Full Louver	External Shields	Integral Full Louver
Rotatable Optics	Consult Factory	Yes	Yes	Yes	Yes	Consult Factory	Yes
Standard CCT/CRI	27K8, 30K8, 35K8, 40K8, 50K8	30K7, 40K7, 50K7	30K7, 40K7, 50K7	30K7, 40K7, 50K7	30K7, 40K7, 50K7	27K8, 30K8, 35K8, 40K8, 50K8	30K7, 40K7, 50K7
Special CCT/CRI	AMB, AMT	AMB, AMT, 80CRI	80CRI	80CRI	80CRI	AMB, AMT	80CRI
IP Rating	IP66	IP66	IP65	IP65	IP65	IP66	IP65
DLC*	Premium & Standard	Premium & Standard	Premium & Standard	Not Listed	Not Listed	Premium	Standard
Paint Finishes	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors
Sensors & Wireless Controls	IMSBT, AirLink Blue	AirLink Synapse	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue	IMSBT, AirLink Blue
7-Pin Receptacle	Yes	Yes	Yes	Yes	Consult Factory	No	No
Surge Device	Optional	10kV Standard	10kV Standard	10kV Standard	10kV Standard	10kV Standard	10kV Standard
BAA	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Vibration	3 G	3 G	1.5 G	1.5 G	1.5 G	-	-
Pricing (per lumen)	\$\$	\$\$	\$\$\$	\$\$\$	\$\$\$	\$\$	\$\$\$

*Custom lumen and wattage packages available, consult factory

**Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.



LSI Industries Inc. 10000 Alliance Rd. Cincinnati, OH 45242 • www.lsicorp.com
(800) 436-7800 • ©LSI Industries Inc. All Rights Reserved. Specifications subject to change without notice.

SELL.1153.C.0325