

ROCK FATHER'S DAY!

HANDCRAFT A CUSTOMIZED APRON TO HONOR THE AMAZING FATHER IN YOUR LIFE



THIS CLASSIC PROJECT TAKES 2-3 HRS TO COMPLETE.

ALL FABRIC & NOTIONS AVAILABLE AT:
WWW.SEWINGPARTSONLINE.COM



ITEMS NEEDED

FABRIC & NOTIONS


- DENIM FABRIC, INDIGO - 60" (1 YARD)
- ROBERT KAUFMAN, ENCHANTED PINES FABRIC - 44/45" (1 YARD)
- MAXI LOCK SERGER THREAD - MEDIUM NAVY
- [NOT PICTURED] MADEIRA GLAMOUR THREAD NO. 12, CRYSTAL (OPTIONAL FOR EMBROIDERED NAME)

GENERAL NOTES

- READ ALL INSTRUCTIONS COMPLETELY BEFORE CONTINUING PROJECT.
- UNLESS OTHERWISE NOTED, ALL SEAM ALLOWANCES ARE SEWN AT 1/4".
- HAVING AN IRON IS HELPFUL, BUT IS NOT REQUIRED FOR THIS PROJECT.
- WHEN CUTTING FABRIC STRIPS, A ROTARY CUTTER IS RECOMMENDED FOR ACCURACY.

CUTTING FABRIC

STEP ONE

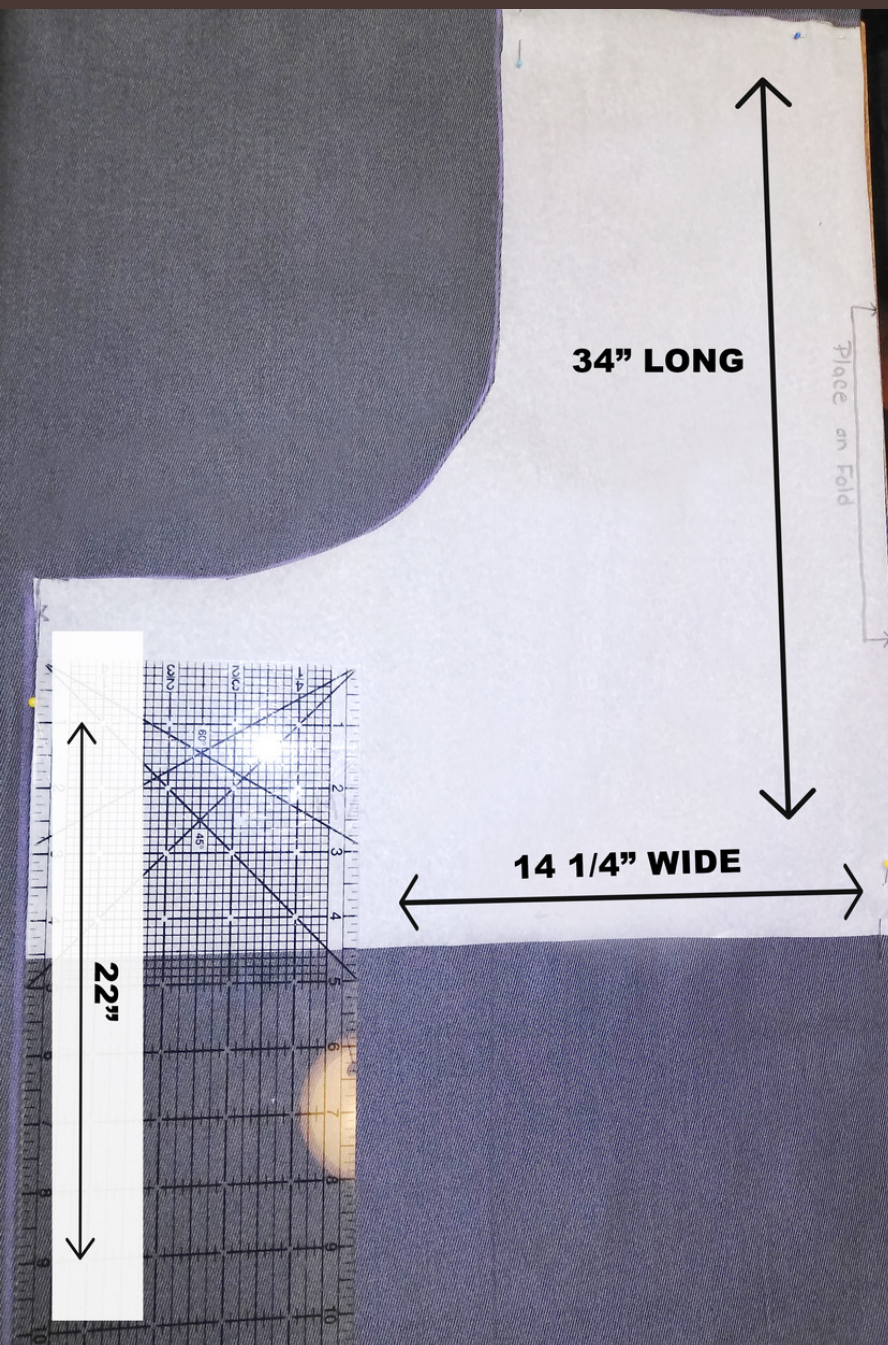


- FOLD THE INDIGO DENIM FABRIC IN HALF.
- CUT THE BIB OF THE APRON BY MEASURING 34" FOR THE LENGTH (ON THE FOLD), 14 1/4" FOR THE WIDTH AND 22" FOR THE SIDES.
- CREATE A CURVE CUT LINE IN THE

ARMHOLE SECTION OF THE 22" SIDE TO THE TOP OF THE APRON BY TRACING AROUND THE TOP EDGE OF A LARGE BOWL.

- USE A ROTARY CUTTER OR SCISSORS TO CUT THE FABRIC.

CUTTING FABRIC

STEP TWO

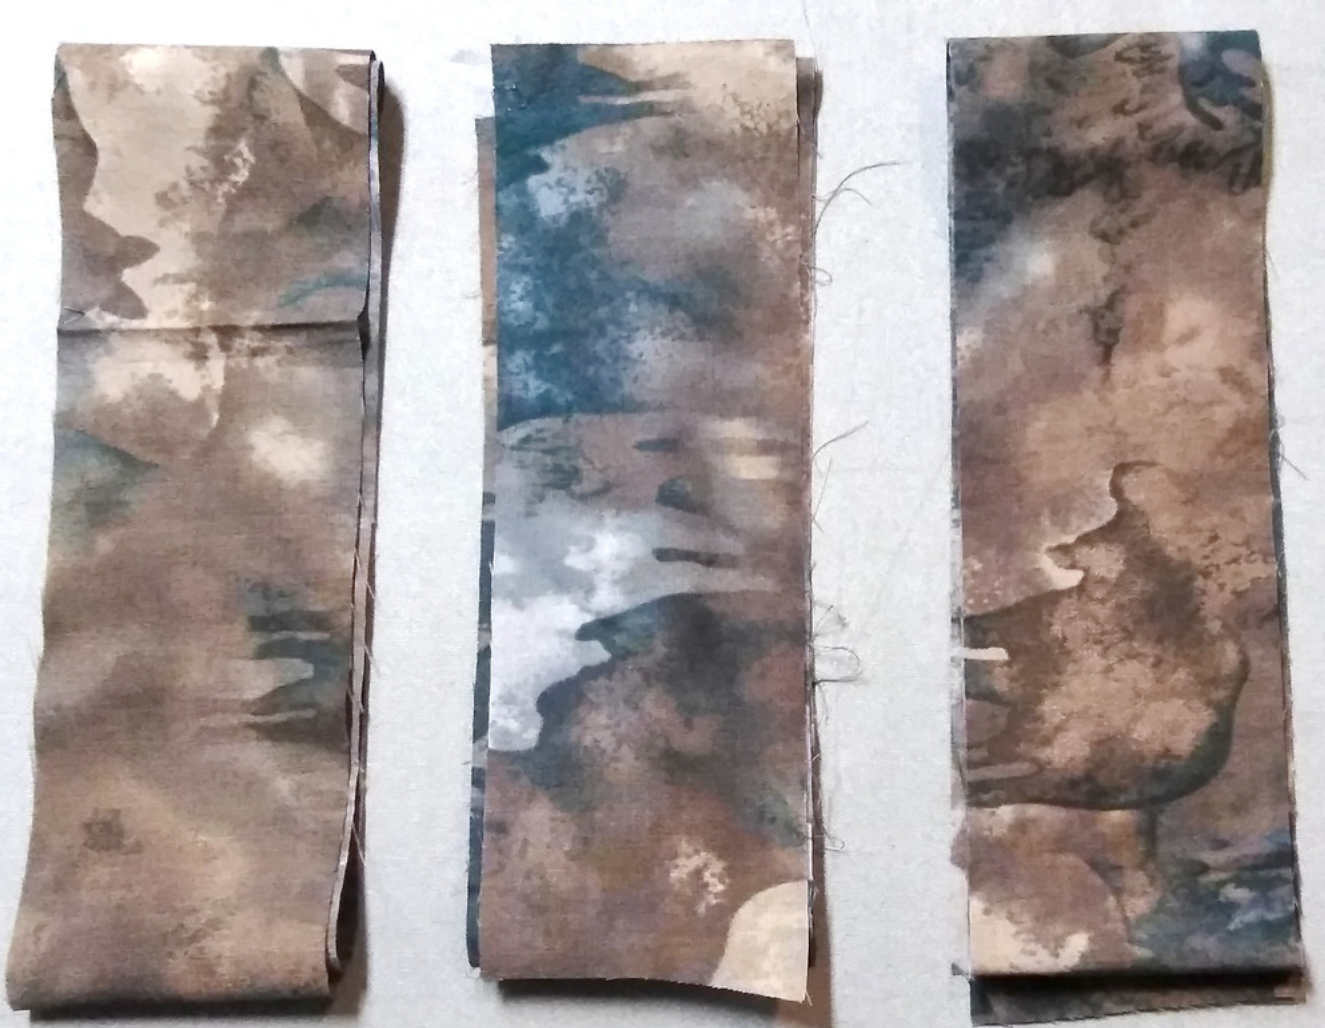

OF THE ENCHANTED PINES FABRIC:

- CUT ONE 2 1/2" X 30" STRIP FOR THE NECK STRAP.
(ADJUST LENGTH IF NECESSARY)
- CUT TWO 2 1/2" X 36" STRIPS FOR THE WAIST TIES.
- [NOT PICTURED] CUT ONE 20" X 18" PIECE FOR THE FRONT POCKET.

SEWING NECK TIES

STEP ONE



- FOLD STRIP LENGTH WISE ABOUT A 1/2" INCH (WRONG SIDES TOGETHER) AND IRON TO PRESS.




- COMPLETE THE SAME PROCESS ON THE OTHER SIDE.

SEWING NECK TIES

STEP TWO



- FOLD LENGTHWISE TO CLOSE BIAS STRIP AND PIN.

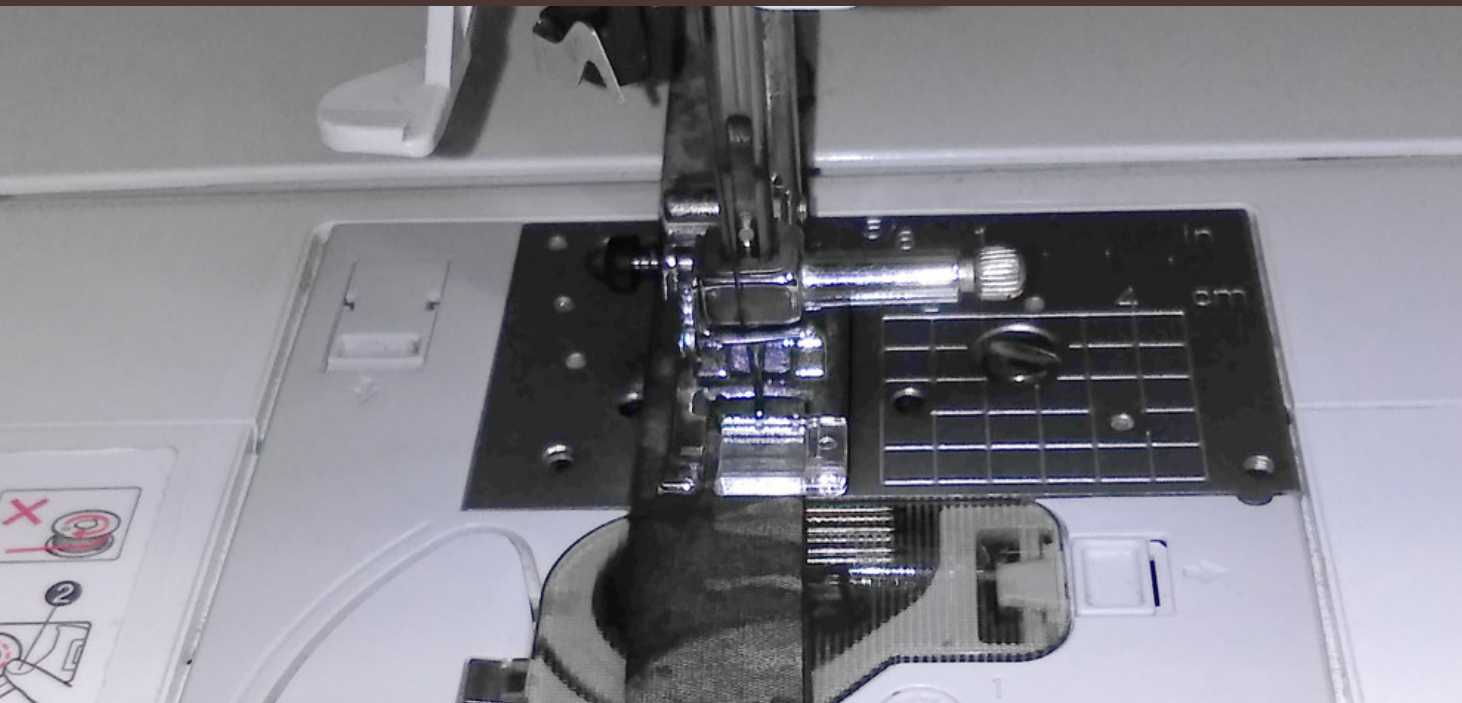


- SEW SEAM CLOSED. (USE MEDIUM NAVY SERGER THREAD)

SEWING WAIST TIES

STEP ONE

- COMPLETE SAME STEPS FOR SEWING THE NECKTIES.
- ENSURE WAIST TIE ENDS ARE FOLDED BACK 1/2" TWICE AND SEW THE HEM.

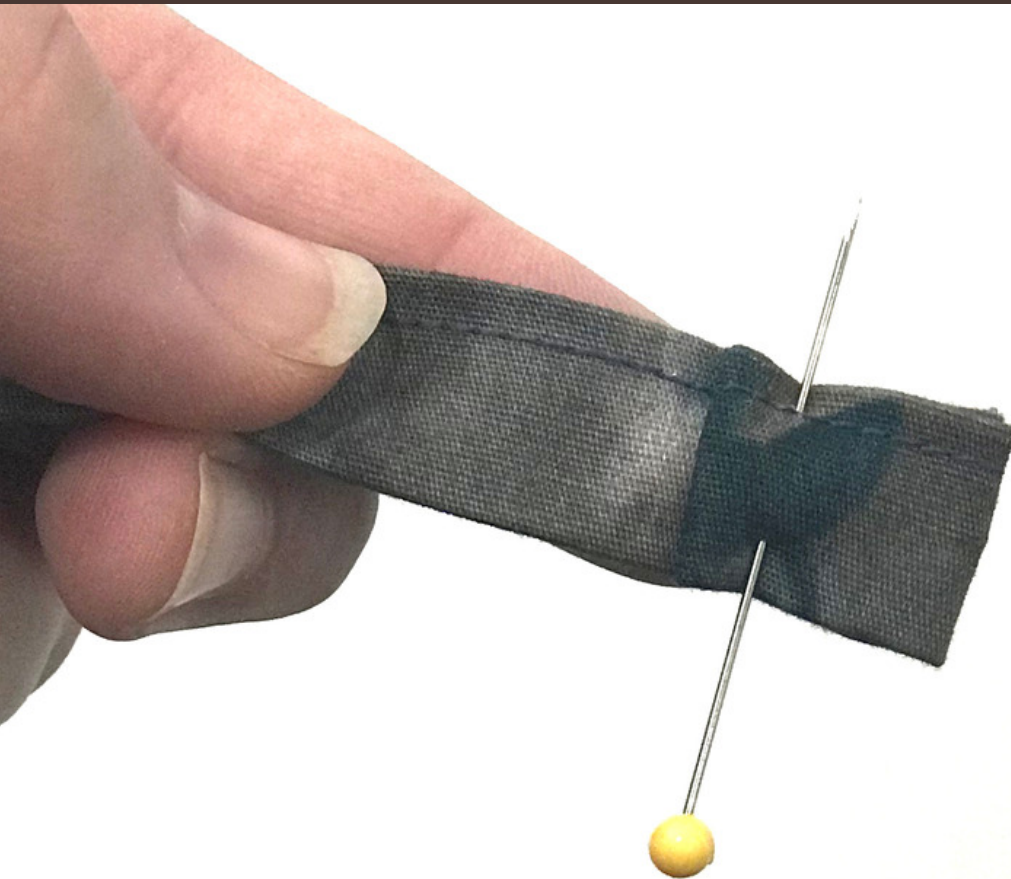

SEWING POCKET

STEP ONE

- FOLD THE 20" X 18" PIECE TO CREATE A 20" X 9" PIECE. (RIGHT SIDES TOGETHER).



SEWING POCKET

STEP TWO


- SEW A SEAM ALONG THE TOP OPEN EDGE TO CREATE A TUBE.




- FLIP FABRIC RIGHT SIDE OUT.
- SEW A SEAM ALONG THE FOLD TO CREATE A DECORATIVE EDGE. (THIS WILL END UP BEING THE TOP OF THE POCKET).
- TUCK RAW EDGES UNDER ON BOTH OPEN SIDES 1/4".
- SEW ALONG THE SEAM OF BOTH SIDES TO CLOSE.

SEWING APRON

STEP ONE

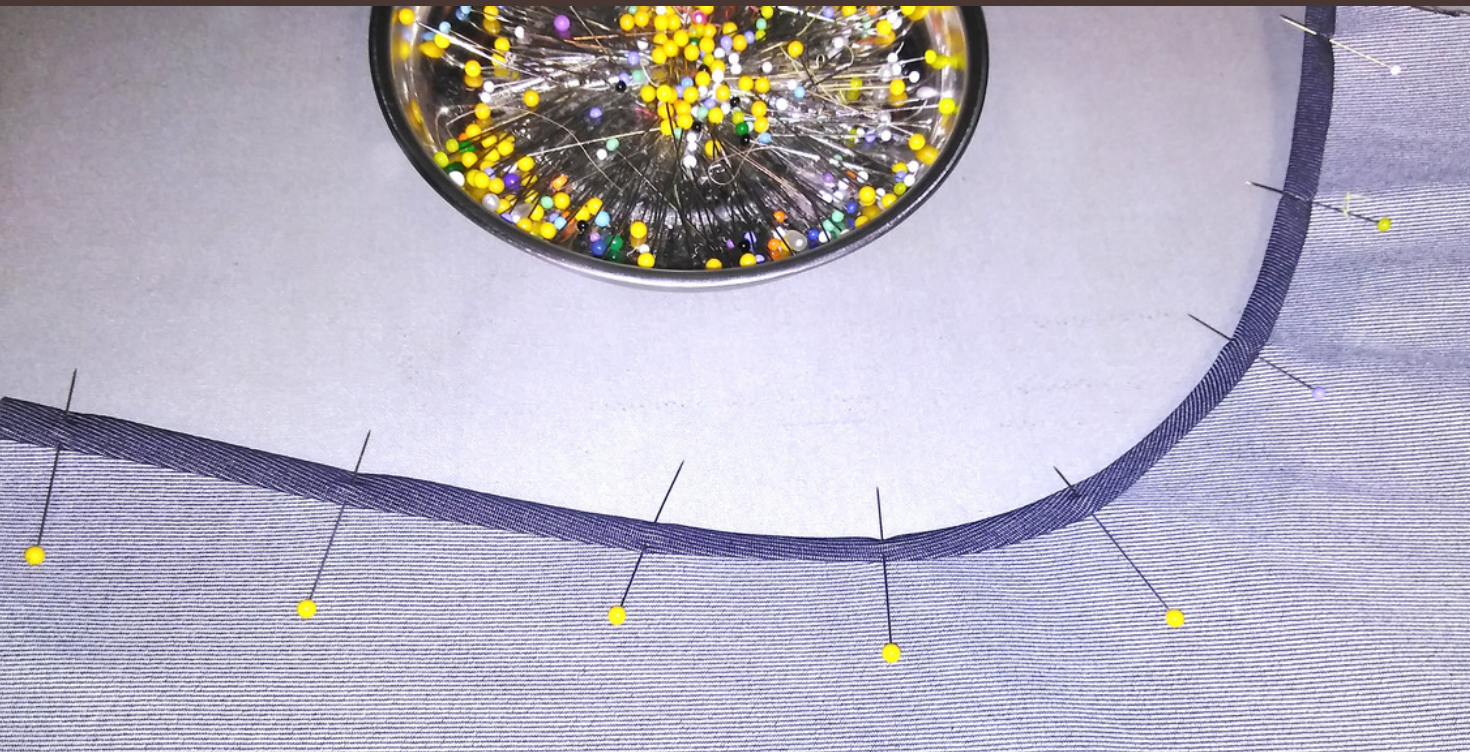


- PIN BOTH ARMHOLE CURVED EDGES BACK 1/4" AND SEW ALONG HEM.

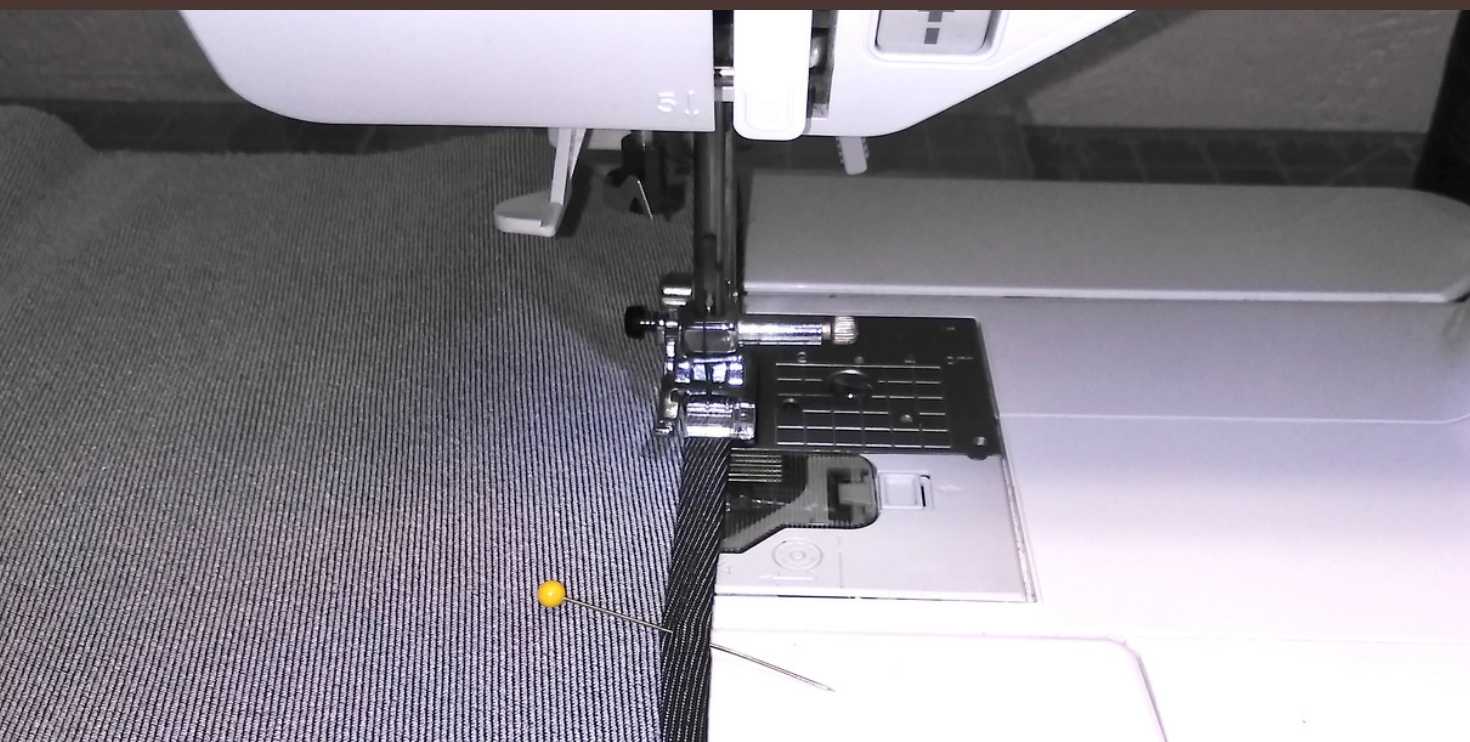

SEWING APRON

STEP TWO

- FOLD FABRIC AT BOTTOM OF APRON 1/4" AND SEW HEM.
- FOLD FABRIC AT TOP OF APRON BACK 1/4". (IRON IF NEEDED)

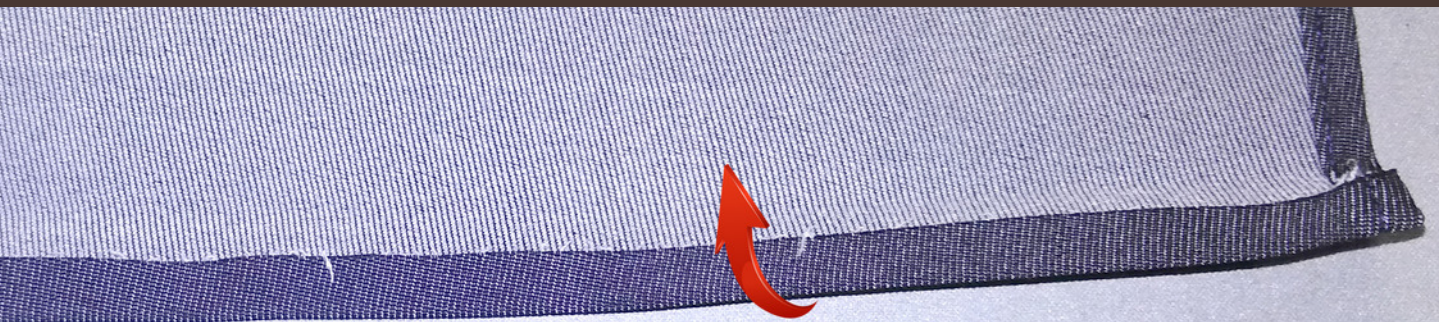


- PLACE NECKSTRAP TIES 1/4" FROM OUTER EDGES (WITH SEAMS FACING OUTWARD).
- MAKE SURE NECKSTRAPS ARE UNDER THE DENIM FABRIC EDGE BEFORE NEXT STEP.



SEWING APRON

STEP THREE


- FOLD HEM OVER ANOTHER 3/4" (NECKSTRAP TIES WILL BE TUCKED INTO HEM).
- FLIP THE NECKSTRAP TIES THE OPPOSITE DIRECTION AND PIN IN PLACE.
- SEW ALONG THE TOP EDGE TO SECURE NECKTIES INTO PLACE.

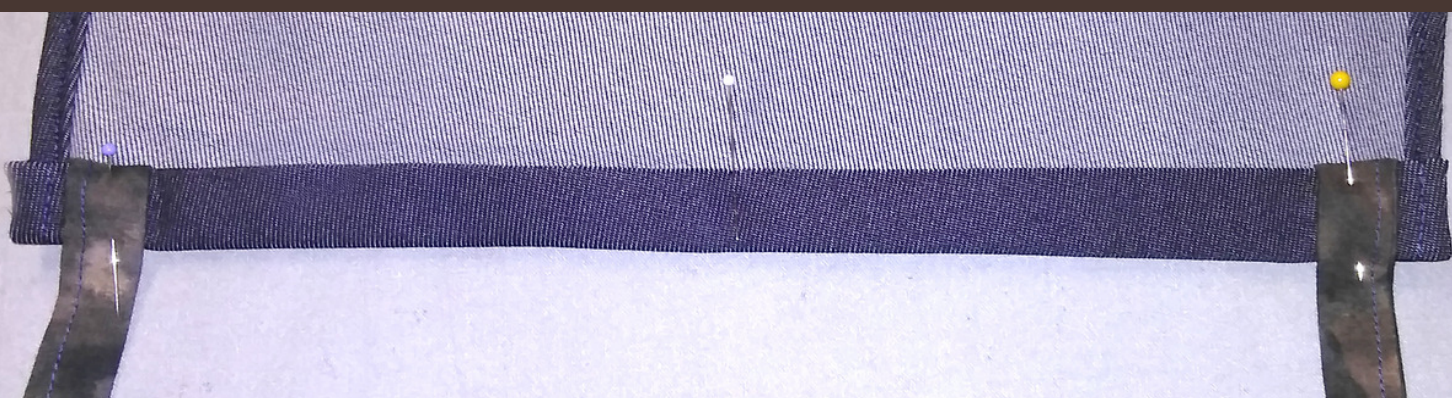

SEWING APRON


STEP FOUR

- COMPLETE "STEP THREE" AGAIN TO SEW THE WAIST TIES ON EACH SIDE OF THE APRON.
- MAKE SURE TO PLACE THE STRAPS 1/4" FROM THE TOP OF THE CURVED EDGE. (SEAMS FACING DOWN)

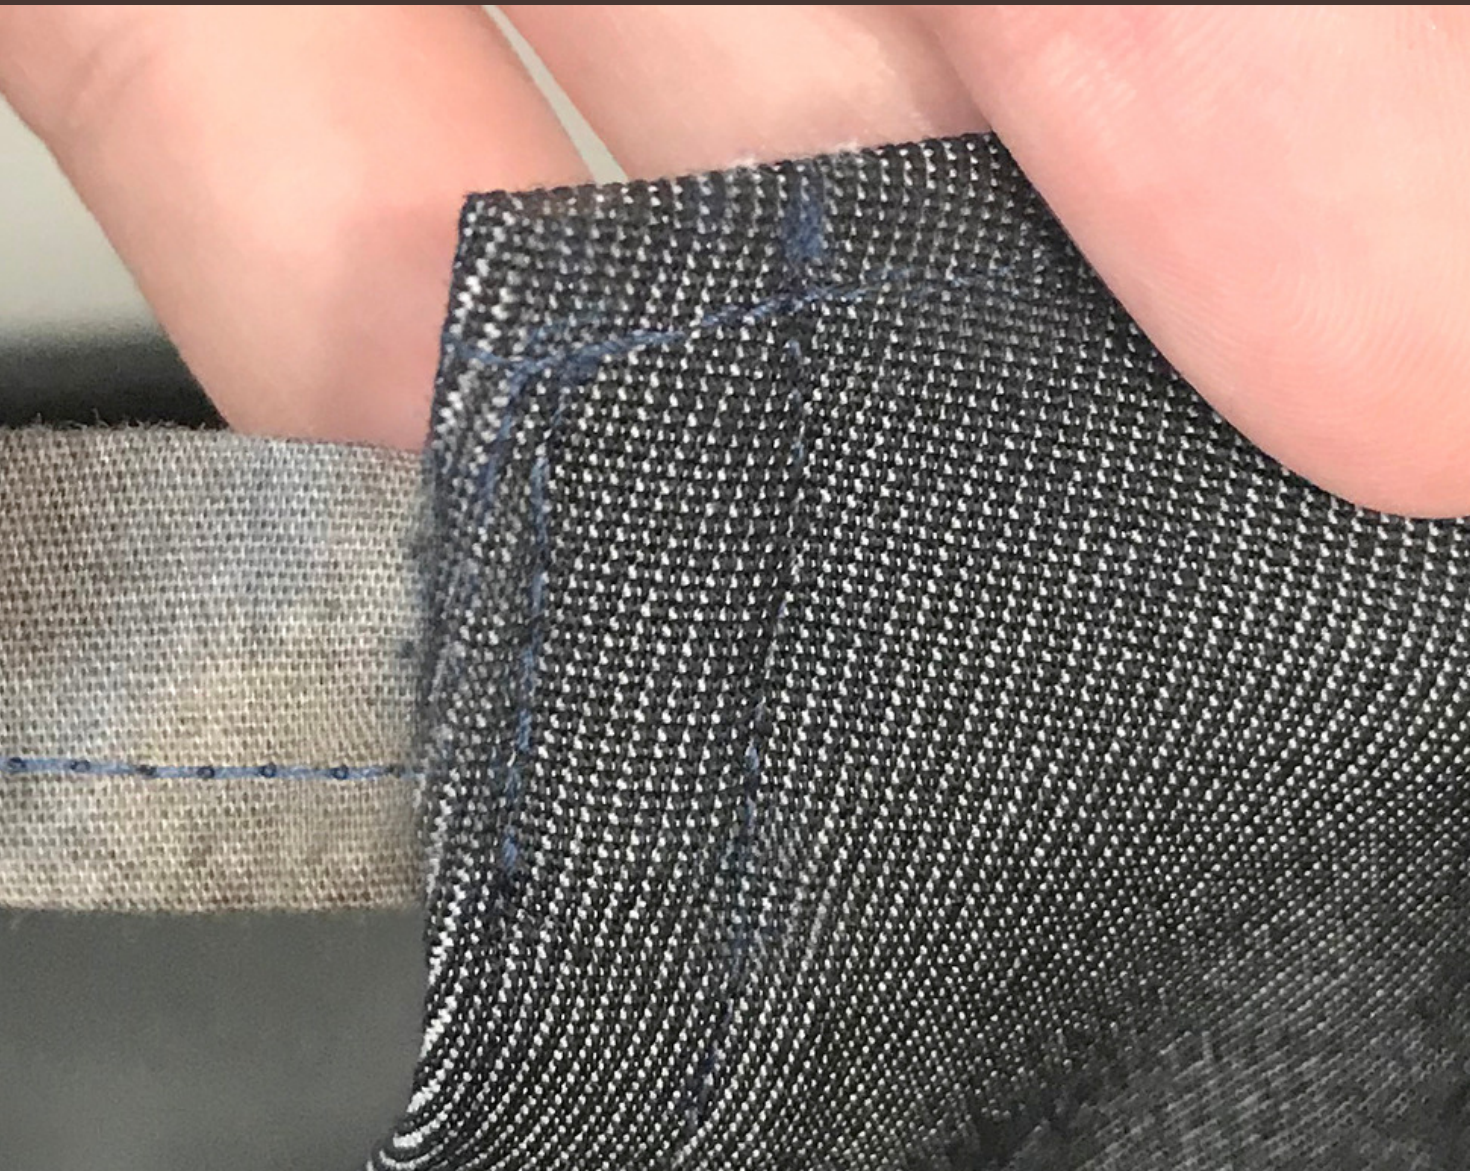

SEWING POCKET ONTO APRON

- PLACE POCKET PIECE IN THE MIDDLE OF THE APRON (ROUGHLY 3 1/8" FROM EITHER SIDE AND 7" FROM THE BOTTOM EDGE). PIN AROUND ALL EDGES.

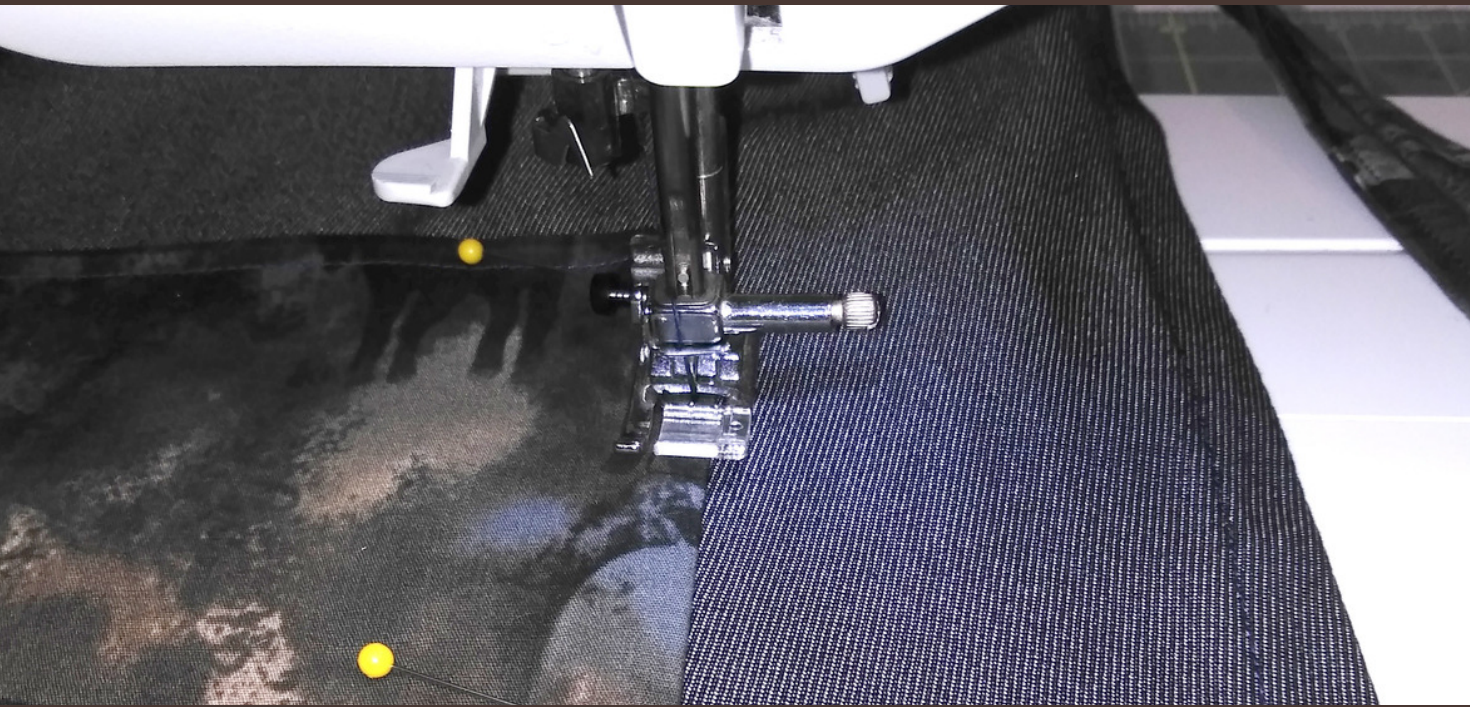

- SEW POCKET INTO PLACE BY SEWING SIDE EDGES AND BOTTOM EDGE. (KEEP TOP OPEN).
- CREATE TWO POCKETS BY SEWING A SEAM DOWN THE MIDDLE OF THE POCKET.
- AS A FINISHING TOUCH, FEEL FREE TO EMBROIDER YOUR FATHER'S NAME ON THE FRONT OF THE APRON.

FINISHED APRON

YOUR COMPLETED APRON WILL LOOK LIKE THIS:

