



Selected by Professionals

Stealth

WELDING MACHINES PRODUCT INFORMATION

- 
 ø 300mm (15kg)
- 
 DUTY CYCLE
60%
Heavy Duty Cycle
- 
 PROTEC
450V
550V Tested in production
- 
 PLP
safe
Phase Loss Protection
- 
 3 PHASE
50/60Hz
240/110V
- 
 SYN
Synergic
- 
 LCD
320 x 480 TFT
- 
 Generator friendly

9003H DIGI-MIG 250-3 LCD Multiprocess

PRODUCT SUMMARY

A versatile 250 amp multiprocess machine capable of holding a 15kg reel of wire. Waveform control for added stability of the arc – even at low currents. Easy-to-navigate LCD screen with 260,000 true colours.

FEATURES

- Capable of loading up to 5kg spool
- Waveform control for added stability of the arc – even at low currents
- Equipped with temperature, voltage and current sensors for high protection
- Optional trolley and water cooling unit
- 260,000 true colours
- M25-3 torch and 2068 regulator included

OPTIONAL EXTRAS

- 9819H** Water Cooler
- 9832H** Air Cooled Tig Package
- 9822H** Water Cooled Tig Package




Supplied with **2068 ARGON/CO₂ PRESSURE REGULATOR**
Single Stage 2g – Argon/CO₂ Regulator – 30 lpm

and **M25-3 MIG TORCH**
3m Bladeswitch
c/w Euro Fitting

ACCESSORIES

ZYFUTWELDCART –
Welding Trolley

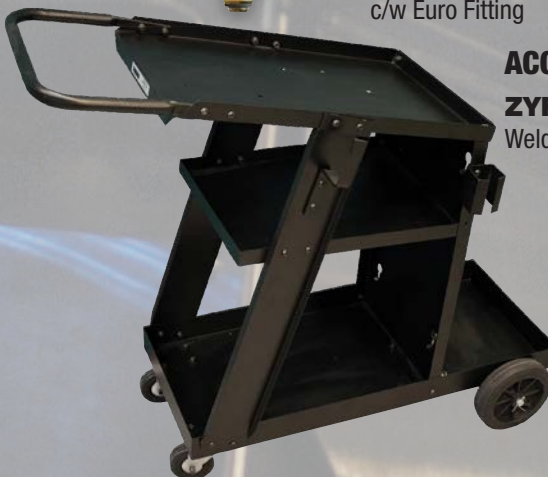

SPECIFICATIONS

Input power voltage (V)	3~400		
Maximum (KVA)	MIG 7.4	TIG 5.9	MMA 7.5
Effective input current (A)	18.0	15.0	19.0
Duty cycle (A) (40°C 10 min)	30% @ 250		
	60% @ 180		
	100% @ 140		
Welding current range (A)	15~250	10~250	10~250
Welding voltage range (V)	25~250 (MIG)	10~250 (TIG/MMA)	
Protection class	Ip23		
Efficiency (%)	80		
Insulation class	H		
Cooling	Air		
Overall dimensions (mm)	630 x 240 x 450		
Weight (kg)	24		
Accessories included	3m Argon hose + Amphenol plug 3m earth return lead 3m electrode lead		

