

Modular Signal Towers / MST 71

**MST71 LED Perm. light element 24VDC BU**



<b>Part No.:</b>	<b>681.539.55</b>
<b>Series:</b>	<b>MST 71</b>



MECHANICAL DATA	
Height	65 mm
Diameter	70 mm
Materials	PC
Dome colour	Blue
Protection category	IP65
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	1 g
Product weight	1 g

ELECTRICAL DATA	
Operating voltage	24V
Operating voltage type	DC
Operating voltage tolerance	+/- 10%
Rated operational voltage	24 VDC
Rated operational current	40 mA
Rated inrush current	250 mA
Protection class	Protection class 3
Pollution degree	3
Request to external PSU	SELV/PELV

OPTICAL DATA	
Light source	LED
Light colour	Blue
Optical signal image	Permanent
Service life optical	50,000 h maximum

APPROVAL DATA	
Conforms with CE	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Modular Signal Towers / MST 71

**MST71 LED Perm. light element 24VDC BU**

Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

**DRAWING**

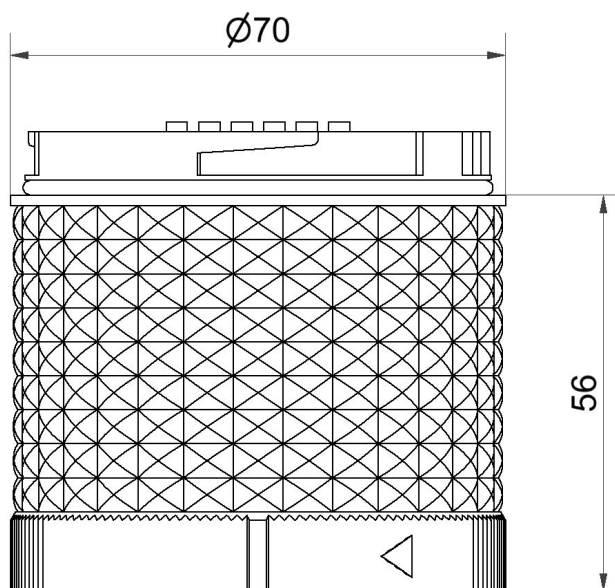

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.