


## Product Selection Guide

Automated production and life

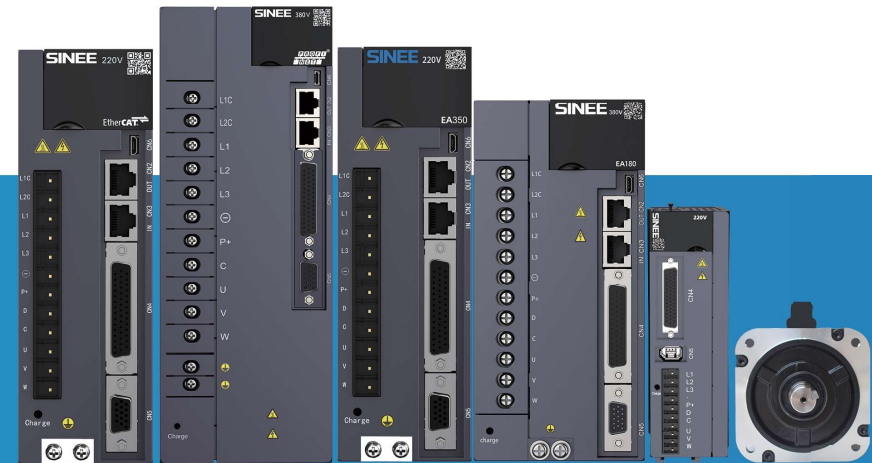

Service hotline: 400-601-9298  
Official website: www.sinee.cn

**Shenzhen Sine Electric Co., Ltd.**

Address: Floor 5, Workshop No.7, Antuoshan Hi-Tech Industrial Park, Sha'er Community, Shajing Sub-district, Bao'an District, Shenzhen

**Wuhan Sine Electric Technology Co., Ltd**

Address: 82 Gaoxin Fifth Road, East Lake High-Tech Development Zone, Wuhan

**Wuxi Branch of Shenzhen Sine Electric Co., Ltd.**

Address: 6/F, Building No. 56, Huaqing Creativity Park, 33 Zhihui Road, Huishan Economic Zone, Wuxi City



High integration



Compacted size



Perfect protection



Stable and reliable

## 01 Company Profile

Introduction to servo driver product line 02

## 03 EA350 series servo driver

Connection diagram of peripheral device 04 Terminal description 05

Model description and dimension diagram 06 Technical specification 08

Motor, driver and cable matching table 09

## 11 EA190 series servo driver

Connection diagram of peripheral device 12 Terminal description 13

Model description and dimension diagram 14 Technical specification 15

Motor, driver and cable matching table 16 Industry scheme 17

## 18 EA196 series servo driver

Connection diagram of peripheral device 19 Terminal description 20

Technical specification 21 dimension diagram 22

## 24 EA180C\P series servo driver

EA180C Connection diagram of peripheral device 25 EA180C Terminal description 26

EA180P Terminal description 27 Model description and dimension diagram 28

Technical specification 30 Motor, driver and cable matching table 31

## 33 EA300E series servo driver

Connection diagram of peripheral device 34 Terminal description 35

Technical specification 36 Motor, driver and cable matching table 37

## 38 EA190E series servo driver

Connection diagram of peripheral device 39 Model description and dimension diagram 40

Technical specification 41 Motor, driver and cable matching table 42

## 44 SER/SES series servo motor

Model description and common features 44 Holding brake specification 45

Installation dimension of SER series servo motor 46 Installation dimension of SES series servo motor 47

Pin distribution of the motor-side power terminal 48 Parameter table of SER series servo motor 49

Parameter table of SES series servo motor 50 Industry scheme 52





# SINEE

Since its establishment in 2003, SINEE (Shenzhen Sine Electric Co., Ltd.) has been focusing on the R&D, production and sales of motor drive and control systems in the field of industrial automation. With the mission of “automated production and life”, it provides the most valuable products and services for users. In 2021, SINEE was listed on the Science and Technology Innovation Board of the Shanghai Stock Exchange (stock code: 688395). At present, it has R&D, production and service bases in Shenzhen, Wuhan and Wuxi.

## Automated production and life

SINEE has established key core technology platforms such as high-performance variable frequency vector control technology, high-precision servo drive technology, embedded computer control technology, and power electronic application technology. It mainly provides inverters, integrated units, servo system products and system solutions.



**Vision**  
Automated production and life



**Operations**  
Motor drive and control system solution provider




**Customers**  
Mechanical equipment manufacturer,  
electronic control system integrator  
and distributor



**Competitiveness**  
Industry market solution and  
customization

# Introduction of servo driver product line

## Input device controller

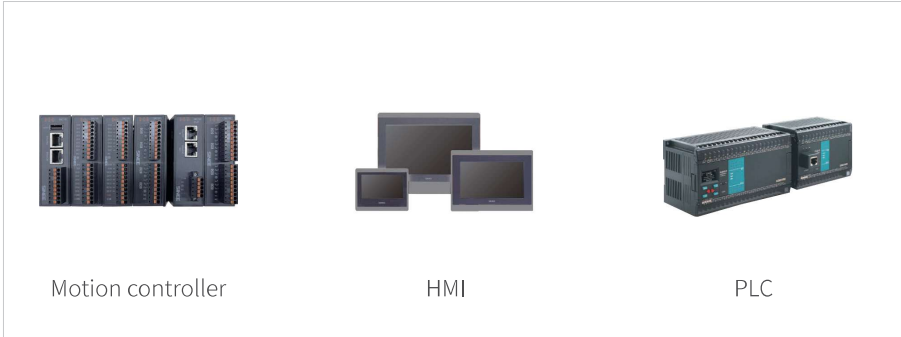




## Servo driver



# EA350series servo driver


Single-phase 220 V ~ 240 V 0.1~1 kW  
 Three-phase 220 V ~ 240 V 0.75~1.5 kW  
 Three-phase 340 V ~ 460 V 1.5~30 kW

-  High performance
-  High electromagnetic compatibility
-  Multi-functional and expansible





## Connection between EA350 analog pulse type servo driver and peripheral device

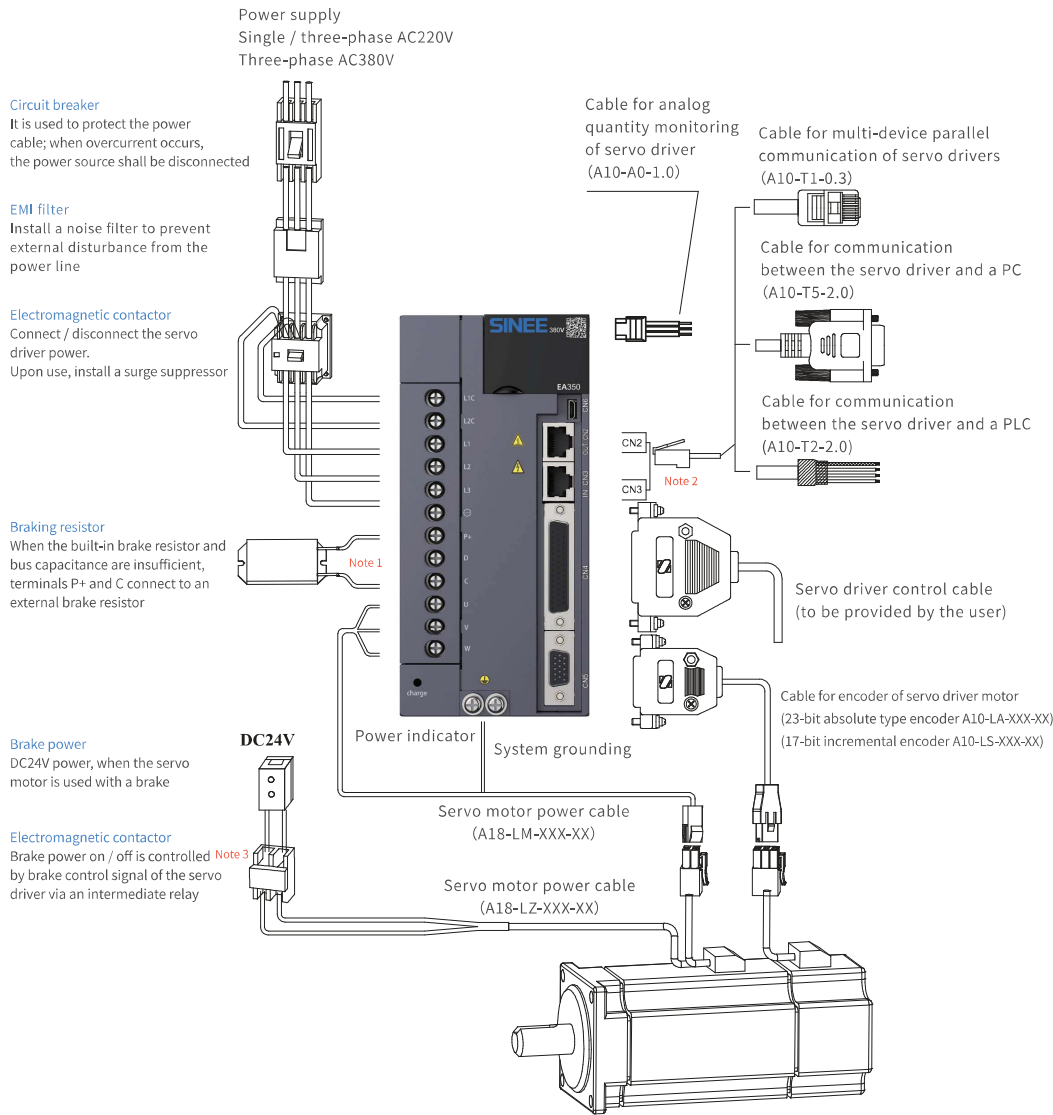

## Terminal description of EA350 analog pulse type servo driver

### Main circuit terminal

Terminal marking	Terminal name
L1C、L2C	Control power input terminal
L1、L2、L3	AC power input terminal of main circuit
P+、D、C	Connecting terminal for an external braking resistor
P+、⊖	Common DC bus terminal
U、V、W	Servo motor connecting terminal
PE	Grounding

### CN1 analog quantity monitoring terminal

Pin number	Signal name	Function
1	AO1	Output voltage 0 V ~ 10 V, Maximum output current 1mA
2	AO2	Common ground of analog output signal
3	GND	Cannot be connected with any signal line
4	Reserved	

### CN2 and CN3 communication terminals

Pin number	Signal name	Function
1	RS485+	Positive terminal of RS485 signal
2	RS485-	Negative terminal of RS485 signal
3	GND	Communication signal reference ground
4	RS232-RXD	RS232 signal receiving side
5	RS232-TXD	RS232 signal sending side

### CN6 USB

According to USB 2.0 specification

### CN4 control terminal

Signal name	Pin number	Default function
DI1	5	S-ON
DI2	20	ALM-RST
DI3	4	P-CLR
DI4	19	P-OT
DI5	3	N-OT
DI6	18	INHIBIT
DI7	2	ORPG
DI8	17	SHOM
COM+	21	DI input common positive terminal
+24V	25/40	Internal 24 V power source, with the voltage range of +20 V ~ 26 V, maximum output current 200 mA.
COM	7/22/36	
+10V	44	
GND	29	+10V power, maximum output of 5mA.
DO1	8	S-RDY+
DO1-	37	S-RDY-
DO2	23	BK+
DO2-	38	BK-
DO3	9	COIN+
DO3-	39	COIN-
DO4	24	ALM+
DO4-	10	ALM-
PA+	28	A pulse frequency division output +
PA-	13	A pulse frequency division output -
PB+	12	B pulse frequency division output +
PB-	27	B pulse frequency division output -
PZ+	11	Z pulse frequency division output +
PZ-	26	Z pulse frequency division output -
OCA	43	ABZ pulse open-collector output (NPN) Maximum allowable input current with GND of 40 mA
OCB	42	
OCZ	35	
GND	29	
AI1	15	Analog input signal, 16-bit resolution, maximum allowable input voltage: ±12V.
AI2	30	
GND	29	
PULHIP	1	Positive terminal when 24V power source is used for position pulse
PULSE+	33	Position pulse command +
PULSE-	34	Position pulse command -
SIGN+	31	Differential position direction command +
SIGN-	32	Differential position direction command -

### CN5 encoder terminal


Pin number	Signal name
1	SD+
3	SD-
5	+5V
10	GND
Housing	PE

**Model description of EA350 series analog pulse type servo driver**


EA 350 X - 6R2 - 2 B - XX  
 ① ② ③ ④ ⑤ ⑥ ⑦

① Product Servo driver	④ Rated output current 0R9-0.9A 062-62A	⑥ Encoder type B: 17/23-bit serial encoder
② series 350 series	⑤ Rated voltage of power supply 1. Single-phase AC220 V 2. Single / three-phase AC220 V 3. Three-phase AC380 V	⑦ Non-standard specification
③ Null:standard A: 16-bit high-precision analog input		


**Dimension diagram of EA350 series analog pulse type servo driver**

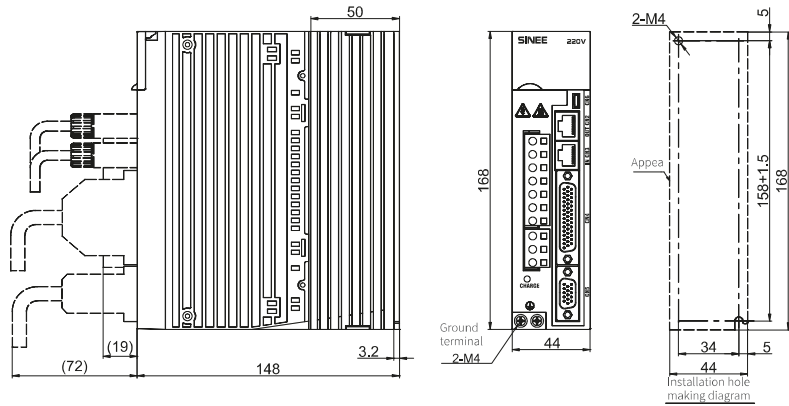


EA350-0R9-1B EA350-1R6-1B EA350-2R5-1B

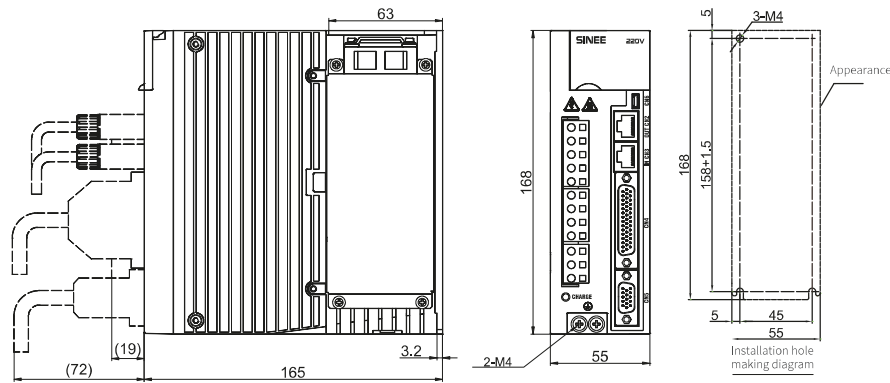


EA350-4R8-2B EA350-6R2-2B

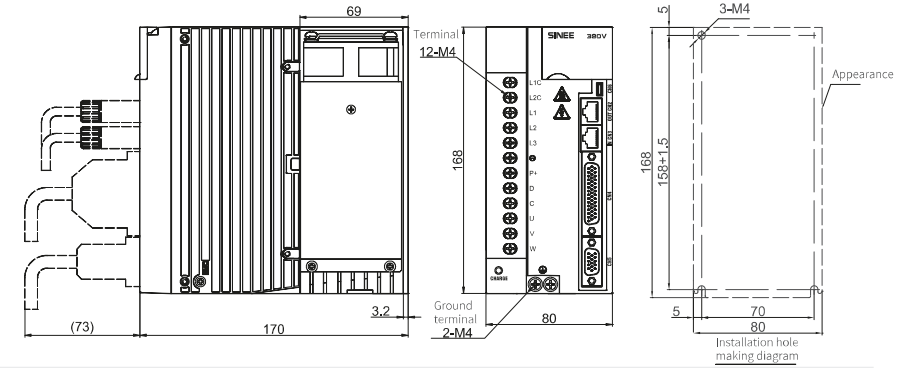

EA350-5R6-3B EA350-8R5-3B EA350-013-3B EA350-011-2B

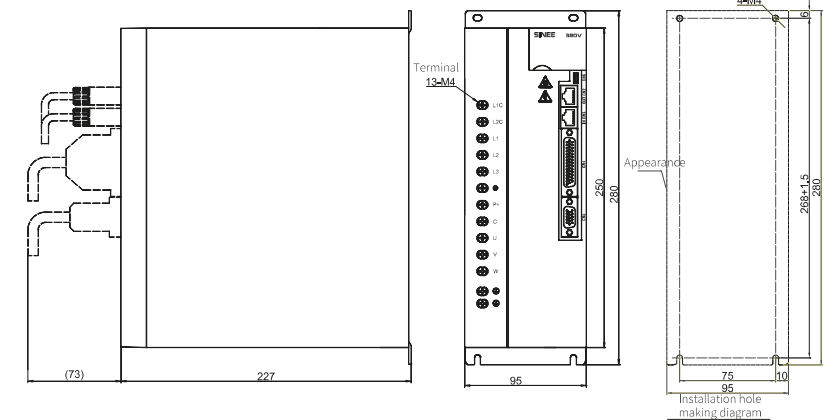

EA350-017-3B EA350-022-3B EA350-028-3B

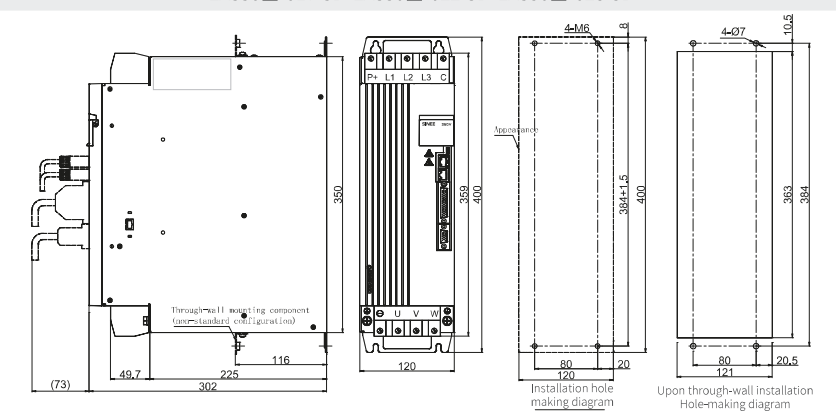

EA350-038-3B EA350-052-3B EA350-062-3B



## Specification of EA350 series analog pulse type servo driver

Operating conditions	Temperature	Working temperature 0~40° , storage temperature -20° ~85°		
	Humidity	Working / storage: ≤ 90% RH (without dew condensation)		
	Altitude	≤ 1,000 m		
	Vibration	≤ 4.9 m/s <sup>2</sup> , 10~60 Hz (no operation at the point of resonance is permitted)		
Cooling method		Fan cooling		
Control method		SVPWM, vector control		
Six control modes		Speed control, position control, torque control, speed / position control, torque / speed control, position / torque control		
Front panel		5 keys, 5-digit LED		
Regenerative brake		Built-in brake unit (a built-in brake resistor is provided in partial specifications), which can have an external resistor connected		
Feedback mode		RS485 serial communication encoder, RA-CODER or FA-FORMAT protocol (non-standard version of FA-FORMAT is supported)		
Digital input/output	Input	Pulse disable, forward drive disable, reverse drive disable, forward inch, backward inch		
	Output	Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, alarm output.		
Protective Function Software	Hardware	Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, encoder alarm, and so on.		
	Software	Excessively large position error, EEPROM fault, and so on.		
Alarm data tracking function		Record 4 groups of historical alarms and relevant data		
Communication function		Modbus RTU		
Encoder signal output	Signal type	A, B, Z differential outputs, Z signal open-collector output; Z signal width can be set. A/B/Z pulse open-collector output (NPN)		
	Resolution	Any frequency division can be programmed and output before or after frequency quadruplication		
Position control mode	Maximum input pulse frequency	Differential input mode: 500 Kpps Open-collector input mode: 200 Kpps		
	Pulse command mode	Pulse + symbol, A and B-phase orthogonal pulse, CW/CCW		
	Command control mode	External pulse command, multi-segment position command		
	Command smoothing mode	Low-pass filtering, FIR filter, trapezoid-shaped smoothing of multi-segment position command		
Speed control mode	Electronic gear ratio	Electronic gear ratio: N/M multiples (0.001 < N/M < 64000 = N: 1~2 <sup>30</sup> , M: 1~230)		
	Position accuracy	±1 pulse command		
	Command control mode	External analog quantity command, digital speed command, multistage speed command, inching command		
Torque control mode	Command smoothing mode	Low-pass filtering, smooth S curve		
	Analog command input	Voltage range	-10 V ~ 10 V	
		Input impedance	10 KΩ	
		Time constant	200 μs	
	Torque limit	Digital setting or external analog quantity limit		
	Speed regulation ratio	1:5000 (23-bit encoder)	Minimal speed/rated rotating speed of continuous stable operation under the rated load	
	Speed fluctuation ratio	Bandwidth	3,000 Hz (23-bit encoder)	
		Load fluctuation (0~100%)	Maximum	0.1%
Supply voltage change ±10%			Maximum	0.1%
Ambient temperature (0~50° C)	Maximum	0.1%		
Command control mode	Command control mode	External analog command, digital torque command		
	Command smoothing mode	Low-pass filtering		
Analog command input	Voltage range	-10 V ~ 10 V		
	Input impedance	10 KΩ		
	Time constant	200 μs		
Speed limit	Digital setting or external analog quantity limit			
Accuracy	±1% (current repetition accuracy)			

## EA350 series servo motor and driver matching table

Servo driver			Motor		
EA350	Model	Supply voltage	Motor	Power wattage	Adaptable motor model
SIZE A	EA350-0R9-1B EA350-1R6-1B EA350-2R5-1B	Single-phase AC220V		50W 100W 200W 400W	SES04-005-30-2FAY □ SES04-0R1-30-2FAY □ SES06-0R2-30-2FBY □ SES06-0R4-30-2FBY □
SIZE B	EA350-4R8-2B EA350-6R2-2B	Single-phase or three-phase AC220V		750W 1000W	SES08-0R7-30-2FBY □ SES04-1R0-30-2FBY □ SES13-1R0-20-2FBY □
SIZE C	EA350-5R6-3B EA350-8R5-3B EA350-013-3B	Three-phase AC380V		850W 1.3KW 1.7KW	SES13-0R8-15-3FBY □ SES13-1R3-15-3FBY □ SES13-1R7-30-3FBY □ SES13-1R1-20-3FBY □ SES13-1R7-20-3FBY □
				1.8KW 2.4KW 2.6KW 2.9KW 3.6KW	SES13-2R6-30-3FBY □ SES13-1R8-15-3FBY □ SES13-2R4-20-3FBY □ SES13-3R6-30-3FBY □ SES18-2R9-15-3FBY □
SIZE C	EA350-011-2B	Three-phase AC220V		0.8KW 1.1KW 1.7KW	SES13-1R1-20-2FBY □ SES13-0R8-15-2FBY □ SES13-1R7-30-2FBY □
SIZE D	EA350-017-3B EA350-022-3B EA350-028-3B	Three-phase AC380V		4.4KW 5.5KW 7.5KW	SES18-4R4-15-3FBY □ SES18-5R5-15-3FBY □ SES18-7R5-15-3FBY □
				11KW 13KW 15KW	SEC20-011-15-3FBY □ SEC20-011-20-3FBY □ SEC20-013-15-3FBY □ SEC20-015-15-3FBY □ SEC23-011-15-3FBY □
SIZE E	EA350-038-3B EA350-052-3B EA350-062-3B	Three-phase AC380 V		15KW/18W/22KW/29KW	SEC23-015-15-3FBY □ SEC23-018-15-3FBY □ SEC23-022-15-3FBY □ SEC23-029-15-3FBY □



## EA350 series servo motor, driver and cable matching table

Motor specification/model	Adaptable driver model	Encoder cable	Motor cable		
SES04-005-30-2FAY □	EA350-0R9-1B	A10-LS-A000-m (without battery) A10-LA-A000-m (without battery)	A18-LM-A007-m (motor power cable) A10-LZ-A005-m (brake cable for motor with a brake)		
SES04-0R1-30-2FAY □	EA350-1R6-1B				
SES06-0R2-30-2FAY □					
SES06-0R4-30-2FAY □	EA350-2R5-1B				
SES08-0R7-30-2FAY □	EA350-4R8-2B				
SES08-1R0-30-2FAY □	EA350-6R2-2B				
SES13-1R1-20-2FAY □	EA350-6R2-2B	A18-LS-H400-m (without battery) A18-LA-H400-m (without battery)	A18-LM-M415-m (motor power cable) A18-LZ-H405-m (Brake line)		
SES13-0R8-15-2FAY □	EA350-011-2B		A18-LM-M420-m (motor power cable) A18-LZ-H405-m (brake cable for motor with a brake)		
SES13-1R7-30-2FAY □					
SES13-0R8-15-3FAY □	EA350-5R6-3B				
SES13-1R1-20-3FAY □					
SES13-1R7-30-3FAY □	EA350-5R6-3B				
SES13-1R3-15-3FAY □					
SES13-1R8-15-3FAY □	EA350-8R5-3B				
SES13-1R7-20-3FAY □					
SES13-2R6-30-3FAY □					
SES18-2R3-15-3FAY □					
SES13-2R4-20-3FAY □	EA350-013-3B			Without brake: A18-LM-M525-m (motor power cable) With brake: A10-LM-M220-m (motor power cable) A18-LZ-H405-m (motor power cable)	
SES13-3R6-30-3FAY □					
SES18-2R9-15-3FAY □	EA350-013-3B			A10-LM-M240-m (motor power cable) A18-LZ-H405-m (brake cable for motor with a brake)	
SES18-3R6-20-3FAY □					
SES18-4R4-15-3FAY □	EA350-017-3B				
SES18-5R5-15-3FAY □	EA350-022-3B				
SES18-7R5-15-3FAY □	EA350-028-3B				
SEC20-011-20-3FAY □	EA350-028-3B			A10-LS-H100-m (without battery) A10-LA-H100-m (with battery)	Not provided
SEC20-011-15-3FAY □					
SEC20-015-20-3FAY □					
SEC20-013-15-3FAY □					
SEC20-015-15-3FAY □					
SEC23-011-15-3FAY □					
SEC23-015-15-3FAY □					
SEC23-018-15-3FAY □					
SEC23-022-15-3FAY □					
SEC23-029-15-3FAY □					
EA350-038-3B	EA350-052-3B				
EA350-062-3B					

**Note:** Type A10/A18-LA encoder cable must be selected and used if the absolute position should be memorized upon power off, and Type A10/A18-LS encoder cable may be selected and used if the absolute position should be memorized without power off.

# EA190 series servo driver

Single/three-phase 220V ~ 240V 50W ~ 1kW



High-speed response



Intelligent control



High-precision positioning




Stable and reliable





## Connection between EA190 pulse type servo driver and peripheral device

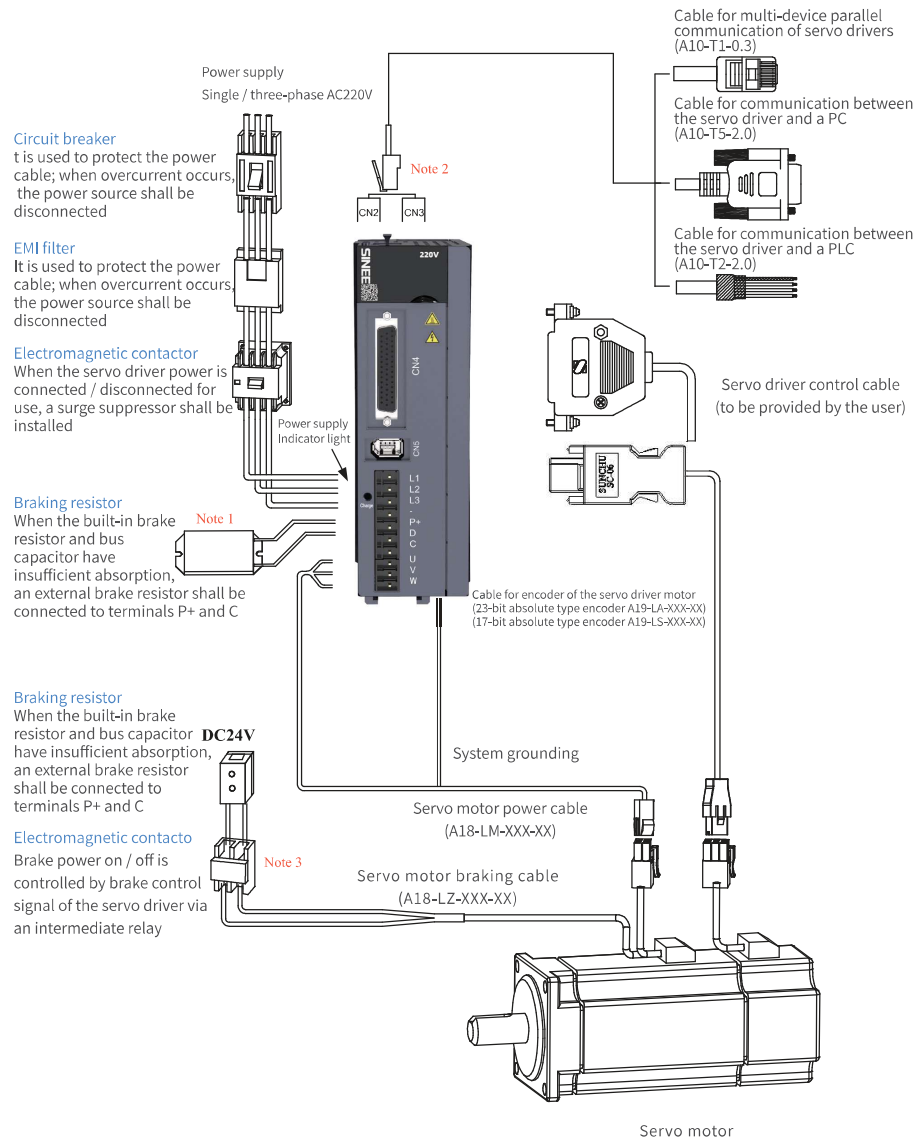

## Terminal description of EA190 pulse type servo driver

### Main circuit terminal


Terminal marking	Terminal name
L1、L2、L3	AC power input terminal
P+、D、C	Connecting terminal for an external braking resistor
P+、 $\ominus$	Common DC bus terminal
U、V、W	Servo motor connecting terminal
PE	Grounding

### CN2 and CN3 communication terminals

Pin number	Signal name	Function
1	RS485+	RS485 communication port
2	RS485-	
3	GND	RS485/RS232 communication reference ground
4	RS232-RXD	The transmitting terminal of RS232 connects to the receiving terminal of the upper computer.
5	RS232-TXD	The receiving terminal of RS232 connects to the transmitting terminal of the upper computer.

### CN6 USB communication terminal

### CN4 control terminal

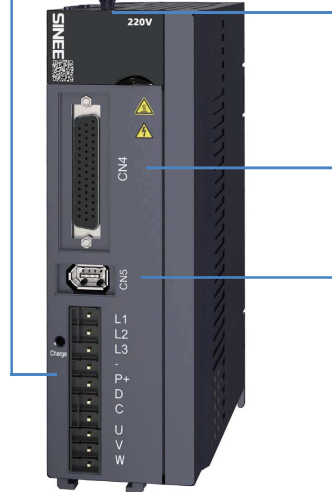

	Signal name	Pin number	Function description
Digital input port	DI1	5	Digital input, default function No. 1
	DI2	20	Digital input, default function No. 2
	DI3	4	Digital input, default function No. 13
	DI4	19	Digital input, default function No. 14
	DI5	3	Digital input, default function No. 3
	DI6	18	Digital input, default function No. 12
	DI7	2	Digital input, default function No. 20
	DI8	17	Digital input, default function No. 21
Power supply	COM+	21	Digital input common positive terminal
	COM	7/22/36	Internal 24V power source, with the voltage range of +20V ~ 26V Maximum output current 100mA Internal 24V power ground; digital input common ground
Digital output	DO1	8	Digital output, default function No. 1
	DO1-	37	
	DO2	23	Digital output, default function No. 2
	DO2-	38	
	DO3	9	Digital output, default function No. 8
	DO3-	39	
	DO4	24	Digital output, fixed function No. 12
	DO4-	10	
Position pulse out/in	DO5	41	Digital output, with ground COM. Default function No. 0
	PULHIP	1	Positive terminal when 24V power source is used for command pulse
	PULSE+	33	Position pulse command +
	PULSE-	34	Position pulse command -
	PULHIS	16	Positive terminal when 24V power source is used for command pulse
	SIGN+	31	Position direction command +
Frequency division output	SIGN-	32	Position direction command -
	PA+	28	Differential frequency division output of pulse A, maximum allowable current 20mA
	PA-	13	
	PB+	12	Differential frequency division output of pulse B, maximum allowable current 20mA
	PB-	27	
	PZ+	11	Differential frequency division output of pulse B, maximum allowable current 20mA
	PZ-	26	
	OCZ	35	Z pulse open-collector output, maximum allowable current 40mA.
GND	29		
	OCA	43	A pulse open-collector output, maximum allowable current 40mA
	OCB	42	B pulse open-collector output, maximum allowable current 40mA

### CN5 encoder terminal


Pin number	Signal name
1	+5V
2	GND
3	+5V
4	GND
5	SD+
6	SD-
Housing	PE

### Model description of EA190 pulse type servo driver


EA 190 X - 6R2 - 2 B - XX  
 ① ② ③ ④ ⑤ ⑥ ⑦

① Product Servo driver	④ Rated output current 0R9-0.9A 6R2-6.2A	⑥ Encoder type B: Serial communication type
② Series 190 series	⑤ Power voltage specification 1.Single-phase 220 V 2.Single / three-phase 220 V	⑦ Special specifications
③ Null:Pulse type		

### Dimension diagram of EA190 pulse type servo driver

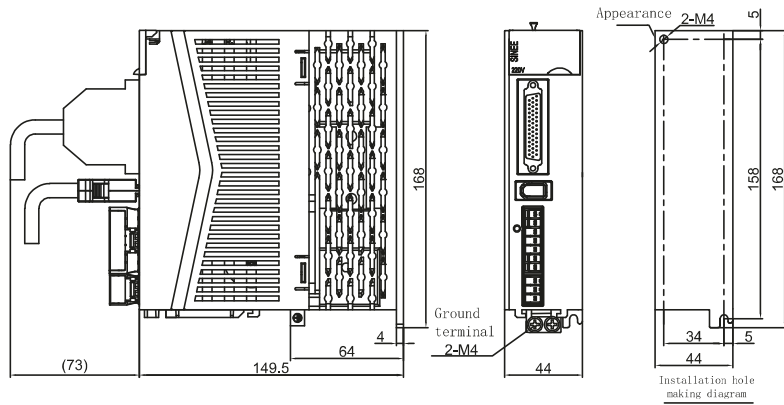

EA190□-0R9-1B EA190□-1R6-1B EA190□-2R5-1B

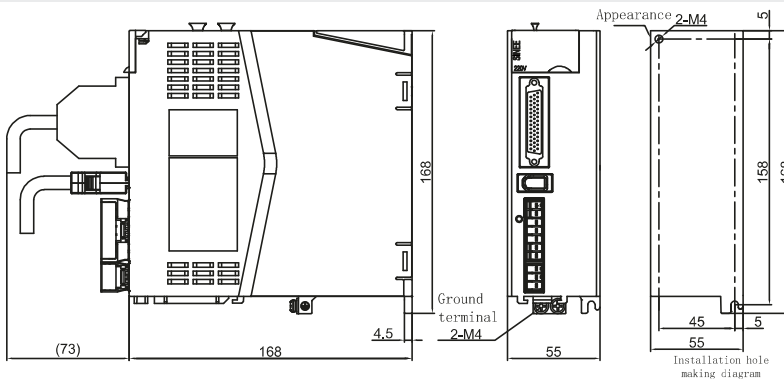

EA190□-4R8-2B EA190□-6R2-2B

### Specification of EA190 pulse type servo driver

Operating conditions	Temperature	Working temperature 0~40°, storage temperature -20°~85°		
	Humidity	Working/storage: ≤ 90% RH (without dew condensation)		
	Altitude	≤ 1,000 m		
	Vibration	≤ 4.9 m/s <sup>2</sup> , 10~60 Hz (no operation at the point of resonance is permitted)		
Cooling method	Fan cooling			
Control method	SVPWM, vector control			
Six control modes	Speed control, position control, torque control, speed / position control, torque / speed control, position / torque control			
Front panel	5 keys, 5-digit LED			
Regenerative brake	Built-in brake unit and resistor; an external braking resistor can be connected			
Feedback mode	Support 17-bit incremental / 23-bit absolute encoder			
Digital input / output	Input	Servo start, alarm resetting, position pulse deviation counter clearing, speed command direction selection, position / speed multi-segment switching, internal command trigger, control mode switching, pulse disable, forward drive disable, reverse drive disable, forward jog, backward jog		
	Output	Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, alarm output.		
Protective Function	Hardware	Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, encoder alarm, and so on.		
	Software	Excessively large position error, EEPROM fault, and so on.		
Alarm data tracking function	Record 4 groups of historical alarms and relevant data			
Communication function	Modbus RTU			
Encoder signal output resolution	Signal type	A, B, Z differential outputs, Z signal open-collector output; Z signal width can be set. A/B/Z 脉冲集电极开路输出 (NPN)		
	Resolution	Any frequency division can be programmed and output before or after frequency quadruplication		
Position control mode	Maximum input pulse frequency	Differential input mode: 500 Kpps Open-collector input mode: 200 Kpps		
	Pulse command mode	Pulse + symbol, A and B-phase orthogonal pulse, CW/CCW		
	Command control mode	External pulse command, multi-segment position command		
	Command smoothing mode	Low-pass filtering, FIR filter, trapezoid-shaped smoothing of multi-segment position command		
	Electronic gear ratio	Electronic gear ratio: N/M multiples (0.001 < N/M < 64000 = N: 1~2 <sup>30</sup> , M: 1~2 <sup>30</sup> )		
	Position accuracy	±1 pulse command		
Speed control mode	Command control mode	digital speed command, multistage speed command, inching command		
	Command smoothing mode	Low-pass filtering, smooth S curve		
	Torque limit	Digital setting limit		
	Speed regulation ratio	1:5000 (23-bit encoder)	Minimal speed/rated rotating speed of continuous stable operation under the rated load	
	Speed regulation ratio	Bandwidth	Load fluctuation (0~100%)	Maximum 0.1%
			Power voltage change ±10%	Maximum 0.1%
Environment temperature (0~50°C)			Maximum 0.1%	
Torque control mode	Command control mode	digital torque command		
	Command smoothing mode	Low-pass filtering		
	Speed limit	Digital setting limit		
	Accuracy	±3% (current repetition accuracy)		





EA190 series servo motor and driver matching table

Servo driver			Motor		
EA190	Model	Supply voltage	Motor	Power wattage	Adaptable motor model
SIZE A	EA190 □ -0R9-1B EA190 □ -1R6-1B EA190 □ -2R5-1B	Single-phase AC220V		50W 100W 200W 400W	SES04-005-30-2HAY □ SES04-0R1-30-2HAY □ SES06-0R2-30-2HBY □ SES06-0R4-30-2HBY □
SIZE B	EA190 □ -4R8-2B EA190 □ -6R2-2B	Single-phase or three-phase AC220V		750W 1000W	SES08-0R7-30-2HBY □ SES08-1R0-30-2HBY □ SER13-1R0-10-2HBY □ SER13-1R0-20-2HBY □ SER13-1R0-30-2HBY □ SES13-1R1-20-2HBY □



EA190 series servo motor and driver matching table

Motor specification / model	Adaptable driver model	Encoder cable	Motor cable
SES04-005-30-2HAY □	EA190□-0R9-1B	A19-LS-A000-m (without battery) A19-LA-A000-m (with battery)	A18-LM-A007-m (motor power cable) A18-LZ-A005-m (brake cable for motor with a brake)
SES04-0R1-30-2HAY □	EA190□-1R6-1B		
SES06-0R2-30-2HBY □	EA190□-2R5-1B		
SES06-0R4-30-2HBY □	EA190□-2R5-1B		
SES08-0R7-30-2HBY □	EA190□-4R8-2B	A19-LS-H100-m (without battery) A19-LA-H100-m (with battery)	Without brake: A18-LM-H115-m With brake: A18-LB-H115-m
SES08-1R0-30-2HBY □	EA190□-4R8-2B		
SER13-1R0-10-2HBY □	EA190□-6R2-2B		
SER13-1R0-20-2HBY □			
SER13-1R0-30-2HBY □			



# Intelligent logistics

## Industrial demand

Rapid development of e-commerce and cold chain logistics in China brings new opportunities for the express delivery industry. The large delivery volume has expedited construction of sorting centers for express delivery of goods, while small modular sorting equipment and systems of high flexibility and performance-cost ratio have become a focus of fast delivery enterprises.

“To accomplish each delivery” is the uppermost pursuit of delivery services. Accurate sorting is obviously a core procedure of delivery. Sorting error will not only cause inconvenience to customers, but also impair confidence of goods sellers and express delivery enterprises. Reliable intelligent sorting systems are helping distribution centers of express delivery enterprises realize “intelligent sorting, fast transfer and less people-dependent operation” of parcels.

## Highlights of the scheme


- Accurate location with a precise high-speed response controller
- Frequency division output, subject to closed-loop configuration control
- Smooth acceleration and deceleration; fast and stable parcel loading
- High sorting efficiency, with single-machine sorting speed of 6-8 K/h

## Scheme composition

- EA196, EA190 series servo motor
- EtherCAT bus communication
- Customized motor cable

# EA196 series servo driver

Single-phase 220V~240V 0.2~0.75kW


 High-speed response

 High-precision positioning

 Easy to use



## Connection between EA196 pulse type servo driver and peripheral device

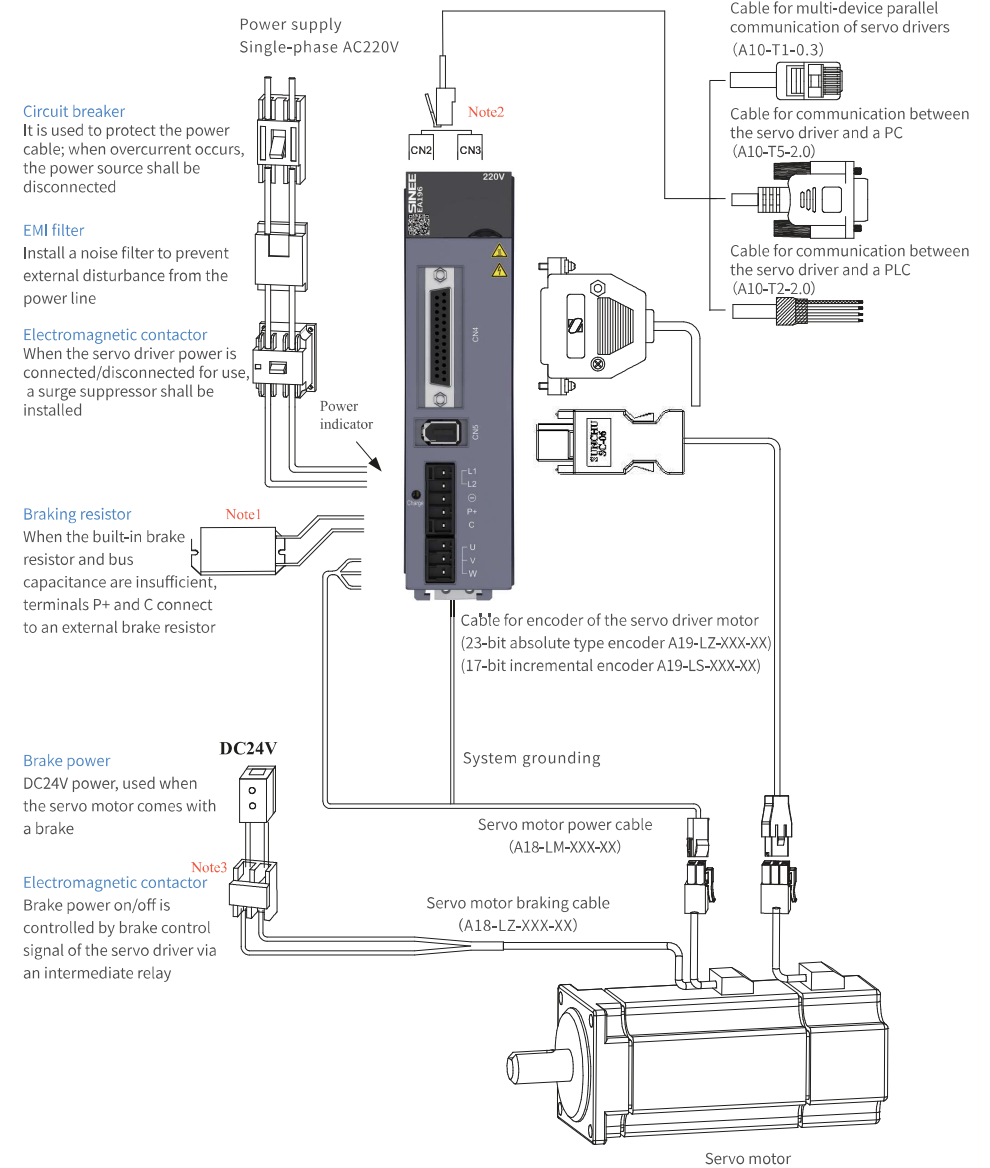

**Note 1:** When an external brake resistor is used, it is required to remove the short-circuiting piece between P+ and D, and correctly set the brake resistor parameter on the driver

**Note 2:** CN2 and CN3 are two RJ45 sockets with identically defined internal pins

**Note 3:** It is strongly recommended that the servo motor brake is defined by the servo driver as the DO terminal of the BK function for control. The DO terminal of the servo driver shall have its load capacity used only for driving an intermediate relay other than an electromagnetic contactor.

## Terminal description of EA196 pulse type servo driver

### Main circuit terminal

Terminal marking	Terminal name
L1、L2	AC power input terminal
P+, D、C	Connecting terminal for an external braking resistor
P+, $\Theta$	Common DC bus terminal
U、V、W	Servo motor connecting terminal
PE	Grounding

### CN2 and CN3 communication terminals

Pin number	Signal name	Function
1	RS485+	RS485 communication port
2	RS485-	
3	GND	RS485/RS232 communication reference ground
4	RS232-RXD	The transmitting terminal of RS232 connects to the receiving terminal of the upper computer
5	RS232-TXD	The receiving terminal of RS232 connects to the transmitting terminal of the upper computer

### CN6 USB communication terminal

### CN4 control terminal

	Signal name	Pin number	Function description
Digital input port	DI1	18	Digital input, default function No. 1
	DI2	6	Digital input, default function No. 2
	DI3	4	Digital input, default function No. 13
	DI4	17	Digital input, default function No. 14
	DI5	5	Digital input, default function No. 3
Power supply	+24V	7	Internal 24V power source, voltage range +20V~26V, maximum output current 100mA
	COM	16	Internal 24V power ground; digital input common ground
Digital output	DO1+	8	Digital output, default function No. 1
	DO1-	20	
	DO2+	21	Digital output, default function No. 2
	DO2-	9	
	DO3+	22	Digital output, default function No. 12
	DO3-	10	
Position pulse input	PULHIP	1	Positive terminal when 24V power source is used for command pulse
	PULSE+	15	Position pulse command +
	PULSE-	3	Position pulse command -
	SIGN+	14	Position direction command +
	SIGN-	2	Position direction command -

### CN5 encoder terminal


Pin number	Signal name
1	+5V
2	GND
3	+5V
4	GND
5	SD+
6	SD-
Housing	PE

## Specification of EA196 pulse type servo driver

Operating conditions	Temperature	Working temperature 0~40° , storage temperature -20° ~85°		
	Humidity	Working/storage: ≤ 90%RH (without dew condensation)		
	Altitude	≤ 1000m		
	Vibration	≤ 4.9m/s <sup>2</sup> , 10-60Hz (no operation at the point of resonance is permitted)		
Cooling method		Fan cooling		
Control method		SVPWM, vector control		
Six control modes		Speed control, position control, torque control, speed/position control, torque/speed control, position/torque control		
Front panel		5 keys, 5-digit LED		
Regenerative brake		Built-in brake unit and resistor; an external braking resistor can be connected		
Feedback mode		17-bit incremental/23-bit absolute encoder		
Digital input/output	Input	Servo start, alarm resetting, position pulse deviation counter clearing, speed command direction selection, position/speed multi-segment switching, internal command trigger, control Mode switching, pulse disable, forward drive disable, reverse drive disable, forward inch, backward inch		
	Output	Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, alarm output.		
Protective Function	Hardware	Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, encoder alarm, and so on.		
	Software	Excessively large position error, EEPROM fault, and so on.		
Alarm data tracking function		Record 4 groups of historical alarms and relevant data		
Communication function		Modbus RTU		
Position control mode	Maximum input pulse frequency	Differential input mode: 500Kpps Open-collector input mode: 200Kpps		
	Pulse command mode	Pulse + symbol, A and B-phase orthogonal pulse		
	Command control mode	External pulse command, multi-segment position command		
	Command smoothing mode	Low-pass filtering, FIR filter, trapezoid-shaped smoothing of multi-segment position command		
	Electronic gear ratio	Electronic gear ratio: N/M multiples (0.001< N/M< 64000 = N: 1~2 <sup>30</sup> , M: 1~2 <sup>30</sup> )		
	Position accuracy	±1 pulse command		
Speed control mode	Command control mode	External pulse, digital speed command, multistage speed command, inching command		
	Command smoothing mode	Low-pass filtering, smooth S curve		
	Torque limit	Digital setting limit		
	Speed regulation ratio	1:5000 (23-bit encoder)	Minimal speed/rated rotating speed of continuous stable operation under the rated load	
	Bandwidth	No less than 400Hz (23-bit encoder)		
	Speed fluctuation ratio	Load fluctuation (0~100%)	Maximum 0.1%	For a 23-bit encoder, when the speed command is the rated rotating speed, (rotating speed without load - rotating speed with full load)/rated rotating speed.
Supply voltage change ±10%		Maximum 0.1%		
Torque control mode	Command control mode	Digital torque command		
	Command smoothing mode	Low-pass filtering		
	Speed limit	Digital setting limit		
	Accuracy	±3% (current repetition accuracy)		



### Dimension of EA196 pulse type servo driver

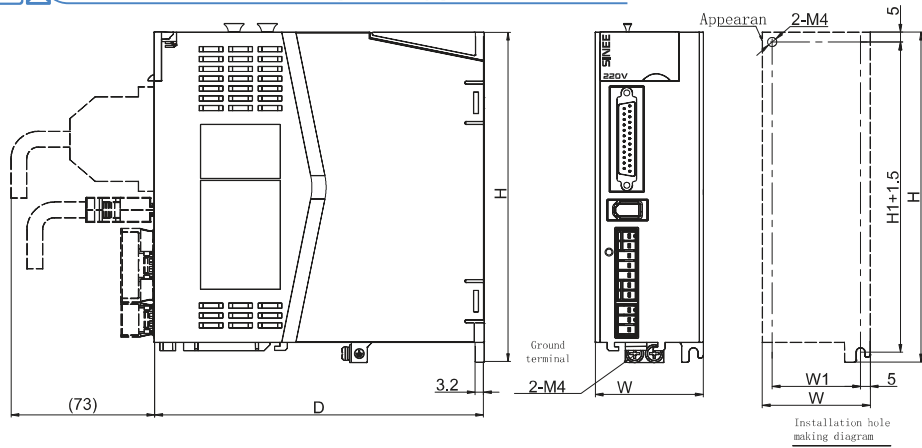

### EA196 series servo motor and driver matching table

Servo driver			Motor		
EA196	Model	Supply voltage	Motor	Power	Adaptable motor model
<p>SIZE A</p> 	EA196-2R5-1B	Single-phase AC220V		200W 400W	SES06-0R2-30-2HBY □ SES06-0R4-30-2HBY □
<p>SIZE B</p> 	EA196-4R8-1B	Single-phase AC220V		750W	SES08-0R7-30-2HBY □

### EA196 series servo motor and driver matching table

Motor specification/model	Adaptable driver model	Encoder cable	Motor cable
SES06-0R2-30-2HBY □	EA190□-2R5-1B	A19-LS-A000-m (without battery)	A18-LM-A007-m (motor power cable)
SES06-0R4-30-2HBY □		A19-LA-A000-m (with battery)	A18-LZ-A005-m (brake cable for motor with a brake)
SES08-0R7-30-2HBY □	EA190□-4R8-2B		

# Printing & packaging

## Front-edge paper feeder

### Industrial demand

It is the core demand of front-edge paper feeding device to make several groups of rubber axles of feed roller coordinate with paper feeding at a certain time sequence according to the real-time position of the printing roller and meet the required precision of the customer after paper feeding.





### Highlights of the scheme

- Motion controller scheme: 350 high-performance servo driver + ultra-low inertia motor + motion controller, with high speed and high accuracy of paper feeding, simple commissioning and convenient maintenance.
- Adaptable motor model
- Motion controller scheme: 350 high-performance servo driver + ultra-low inertia motor + motion controller, with high speed and high accuracy of paper feeding, simple commissioning and convenient maintenance.




# EA180C\P servo driver

Single-phase 220V~240V 0.1~1kW  
 Three-phase 220V~240V 0.75~1.5kW  
 Three-phase 340V~460V 1.5~30kW

-  High-speed response
-  Bus control
-  High-precision positioning
-  Easy to use



## Connection between EA180 CANopen bus servo driver and peripheral device

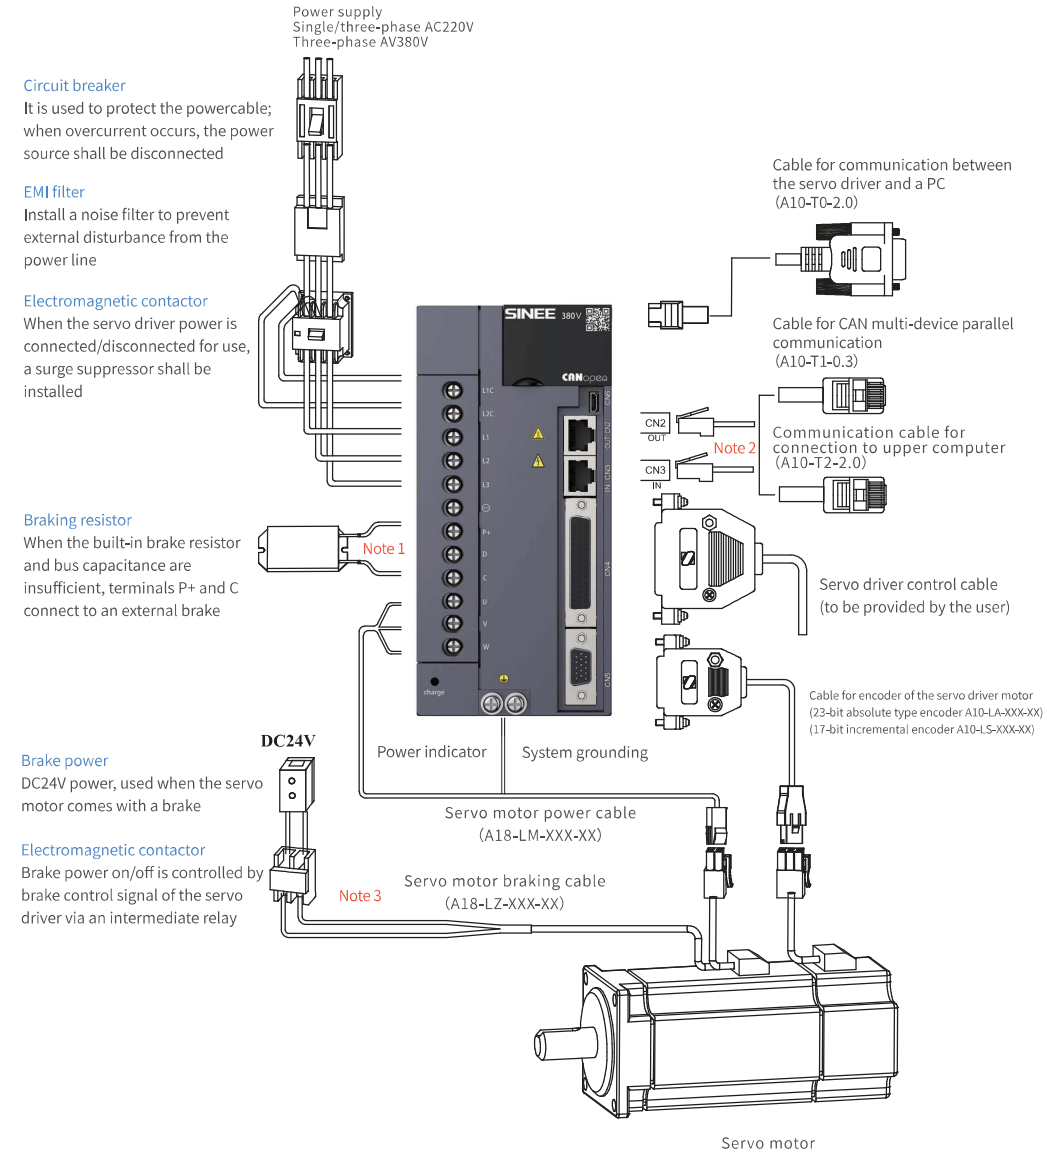

## Terminal description of EA180 CANopen servo driver

### Main circuit terminal

Terminal marking	Terminal name
L1C、L2C	Control power input terminal
L1、L2、L3	AC power input terminal of main circuit
P+、D、C	Connecting terminal for an external braking resistor
P+、⊖	Common DC bus terminal
U、V、W	Servo motor connecting terminal
PE	Grounding

### CN1 analog quantity monitoring terminal CN2 and CN3 communication terminals

Pin number	Signal name	Function
1	AO1	Output voltage 0V ~ 10V, maximum output current 1mA
2	AO2	
3	GND	Common ground of analog output signal
4	Reserved	Cannot be connected with any signal line

Pin number	Signal name	Function
1	RS485+	Positive terminal of RS485 signal
2	RS485-	Negative terminal of RS485 signal
3	GND	Communication signal reference ground
4	RS232-RXD	RS232 signal receiving side
5	RS232-TXD	RS232 signal sending side
6	GND	Communication signal reference ground
7	CANH	CAN communication reference ground
8	CANL	Negative terminal of CAN signal

### CN6 USB communication terminal

According to USB 2.0 specification

### CN4 control terminal

Signal name	Pin number	Default function		
Digital input port	DI1	5	S-ON	Servo on
	DI2	20	ALM-RST	Alarm fault resetting
	DI3	4	P-CLR	Pulse deviation counter clearing
	DI4	19	P-OT	Inhibit forward drive
	DI5	3	N-OT	Inhibit reverse drive
	DI6	18	INHIBIT	Pulse inhibited
	DI7	2	ORPG	Homing detection signal
	DI8	17	SHOM	Homing enable
Power supply	+24V	25/40	Internal 24V power source, voltage range +20V~26V, maximum output current 200mA	
	COM	7/22/36		
	+10V	44	+10V power, maximum output of 10mA	
Digital output	DO1	8	S-RDY+	The servo is ready and can be connected when S-ON signal status can be received
	DO1-	37	S-RDY-	
	DO2	23	BK+	Brake control signal
	DO2-	38	BK-	
	DO3	9	COIN+	"Position reached" signal
	DO3-	39	COIN-	
	DO4	24	ALM+	Connected upon occurrence of a fault
	DO4-	10	ALM-	
Frequency division output	DO5	41	Disabled	No function predefined
	PA+	28	A pulse frequency division output +	
	PA-	13	A pulse frequency division output -	
	PB+	12	B pulse frequency division output +	
	PB-	27	B pulse frequency division output -	
	PZ+	11	Z pulse frequency division output +	
	PZ-	26	Z pulse frequency division output -	
	OCZ	35	Z pulse open-collector output, maximum allowable current 40mA.	
	GND	29		

### CN5 encoder terminal

Pin number	Signal name
1	SD+
3	SD-
5	+5V
10	GND
Housing	PE

## Terminal description of EA180 PROFINET bus servo driver

### CN1 RS232 communication terminal

Pin number	Signal name	Function
1	RS232-TXD	RS232 signal sending side
2	RS232-RXD	RS232 signal receiving side
3	GND	RS232 communication signal reference ground
4	Reserved	Cannot be connected with any signal line

### CN2 and CN3 PROFINET communication terminals

CN3 PROFINET Port1		CN2 PROFINET Port2	
Pin number	Signal name	Pin number	Signal name
1	TD+	1	TD+
2	TD-	2	TD-
3	RD+	3	RD+
4		4	
5		5	
6	RD-	6	RD-
7		7	
8		8	

### CN4 control terminal

Signal name	Pin number	Default function	
Digital input port	DI1	5	P-OT
	DI2	20	N-OT
	DI3	4	ORPG
	DI4	19	ALM-RST
Power supply	COM+	21	Digital input common positive terminal (12~24V)
	COM	7/22/36	Internal 24V power source, voltage range +20V~26V, maximum output current 200mA
Digital output	DO1	8	S-RDY+
	DO1-	37	S-RDY-
	DO2	23	BK+
	DO2-	38	BK-
	DO3	9	COIN+
	DO3-	39	COIN-
DO4	24	ALM+	
DO4-	10	ALM-	

### Main circuit terminal

Terminal marking	Terminal name
L1C、L2C	Control power input terminal
L1、L2、L3	AC power input terminal of main circuit
P+、D、C	Connecting terminal for an external braking resistor
P+、⊖	Common DC bus terminal
U、V、W	Servo motor connecting terminal
PE	Grounding

### CN5 encoder terminal

Pin number	Signal name
1	SD+
3	SD-
5	+5V
10	GND
Housing	PE

**Note:** For connection between EA180P PROFINET bus servo driver and peripheral device, use connection between EA300EETHERCAT bus servo driver and peripheral device for reference.




## Model description of Series EA180C/P servo driver


EA 180 C - 6R2 - 2 B - XX  
 ① ② ③ ④ ⑤ ⑥ ⑦

① Product Servo driver	④ Rated output current 0R9-0.9A 028-28A	⑥ Encoder type B: 17/23-bit serial encoder
② Series 180 series		
③ C: CANOpen bus P: PROFINET bus	⑤ Power voltage specification 1. Single-phase 220V 2. Single/three-phase 220V 3. Three-phase 380V	⑦ Non-standard specification

Supply voltage	Driver model	Rated motor power (KW)	Rated current (A)	Maximum current (A)	Structure	Adaptive motor encoder	
Single-phase 220V	EA180 □ -0R9-1 □	0.05	0.9	3.15	SIZE A	□ -B: 17/23-bit serial encoder	
	EA180 □ -1R6-1 □	0.02	1.6	5.6			
	EA180 □ -2R5-1 □	0.4	2.5	9.0			
Single-phase or three-phase 220V	EA180 □ -4R8-2 □	0.75	4.8	14.4	SIZE B		
	EA180 □ -6R2-2 □	1	6.2	18.6	SIZE B		
Three-phase 220V	EA180 □ -011-2 □	1.5	11	30	SIZE C		
Three-phase 380V	EA180 □ -5R6-3 □	1.5	5.6	15	SIZE C		□ -B: 17/23-bit serial encoder
	EA180 □ -8R5-3 □	2	8.5	20			
	EA180 □ -013-3 □	3	13	30			
	EA180 □ -017-3 □	4.4	17	42.5	SIZE D		
	EA180 □ -022-3 □	5.5	22	55			
EA180 □ -028-3 □	7.5	28	70				

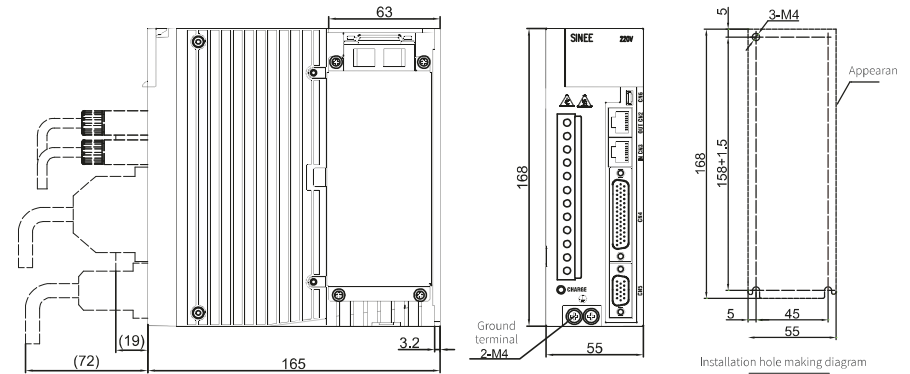


EA180□-4R8-2□ EA180□-6R2-2□

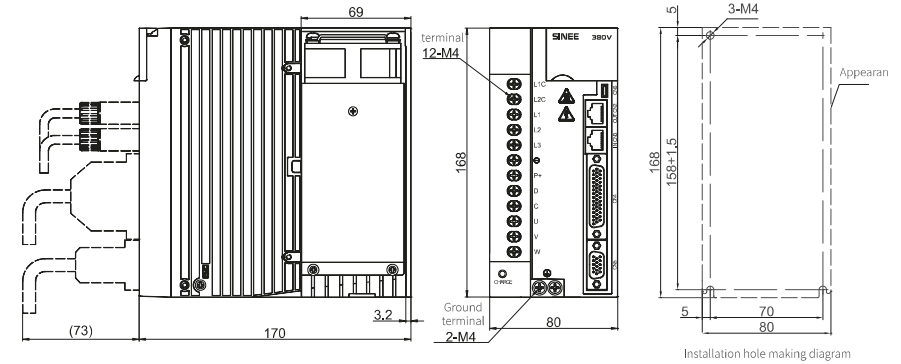


EA180□-5R6-3□ EA180□-8R5-3□ EA180□-013-3□ EA180□-011-2□

## Dimension diagram of Series EA180C/P servo driver

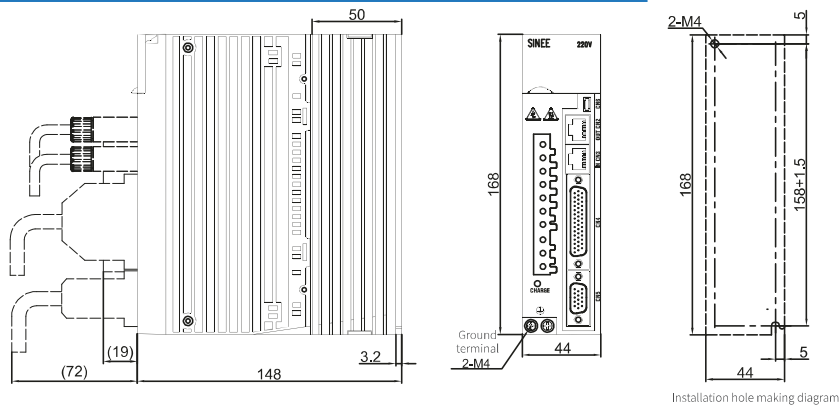

EA180□-0R9-1□ EA180□-1R6-1□ EA180□-2R5-1□

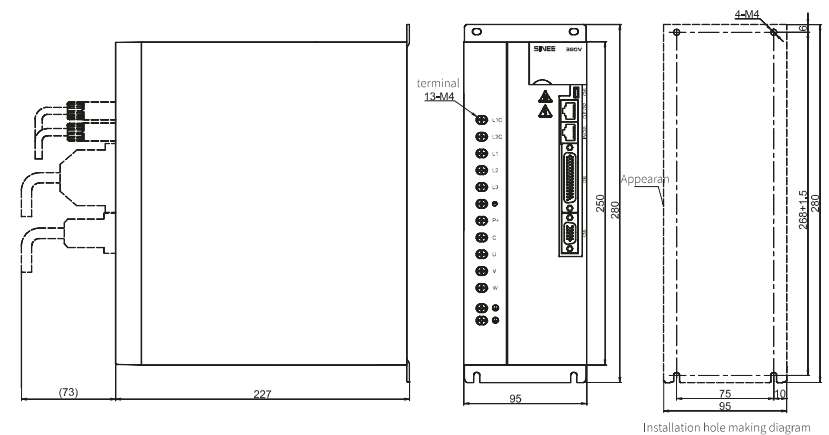

EA180□-017-3□ EA180□-022-3□ EA180□-028-3□

## Technical specification of Series EA180C\P bus servo driver

### EA180C CANopen and EA180P PROFINET bus servo driver

Item		Specification	
Basic specification	Control method	IGBT PWM control sine-wave current drive	
	Feedback	17-bit incremental/encoder, 23-bit absolute encoder	
	Six control modes	Speed control, position control, torque control, speed/position control, torque/speed control, position/torque control	
	Front panel	5 keys, 5-digit LED	
	Regenerative brake	Built-in brake unit and resistor; an external braking resistor can be connected	
	Use conditions	Environment temperature	Working temperature 0~40° , storage temperature -20° ~85°
		Ambient humidity	Working/storage: ≤ 90%RH (without dew condensation)
		Altitude	≤ 1,000m
		Anti-vibration impact strength	Vibration: ≤ 4.9m/s <sup>2</sup> (no operation at the point of resonance is permitted), impact: ≤ 19.6m/s <sup>2</sup>
		Protection level	IP10
Cooling method	Pollution level	2 level	
		Fan cooling	
Performance	Speed-torque control mode	Speed fluctuation ratio	Load fluctuation: 0~100 load: Maximum 0.3%
		Supply voltage change	At rated voltage ± 10%: Maximum 0.3%
		Environment temperature	0~50°C : Maximum 0.3%
		Speed regulation ratio	1:5000 (17bit and 23bit encoder)
		Frequency bandwidth	1.2kHz (23-bit encoder)
	Position control mode	Torque control accuracy	±3% current repetition accuracy
		Soft start time setting	0~30s (acceleration and deceleration can be set respectively)
		Feedforward compensation	Resolution 0~100% (set resolution 1%)
		Positioning completion width	1~655,335 instruction units (set resolution to 1 instruction unit)
		Min setting time	5ms (no load, from rated speed to positioning completion)

### EA180 CANopen and EA180P PROFINET bus servo driver

Item		Specification	
EA180C	Input/ output signal	Digital input port	8 DI Fault reset, position pulse deviation counter clearing, pulse disable, forward drive disable, reverse drive disable, second torque limit, forward inch, backward inch, others
		Digital output	4 DO Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, fault output, others
	Built-in function		Slow down and stop when P-OT and N-OT are valid
		LED display	5-digit LED display: Main circuit CHARGE
		Protective Function	Over-voltage, under-voltage, over-current, over-speed, IGBT overheat, overload, encoder exception, excessive position error, EEPROM fault, abnormal communication, others
		Others	Two-stage gain switching, automatic gain adjustment, 4 groups of alarm record, JOG operation
EA180P	Input/output signal	Digital input port available	Fault reset, forward drive disable, reverse drive disable, forward inch, backward inch, electronic gear ratio switching etc.
		Digital output available	Servo ready, brake output, motor rotation output, zero-speed signal, torque limit, rotating speed limit, warning output, fault output etc.
	Built-in function	Over-travel prevention function	Stopped immediately when P-OT and N-OT are activated. 1.0 ≤ B/A ≤ 64000.0
		Protective Function	Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, over-temperature, encoder fault, braking resistor overload fault, EEPROM fault, abnormal communication etc.
		Alarm data tracking function	Record 4 groups of historical alarms and relevant data
EA180C	Communication function	RS232 communication	Status display, user parameter setting, monitoring display, alarm tracking display, JOG operation and automatic adjustment operation, speed instruction signal etc.
		Communication mode	RS232, RS485, CANopen
		CANopen bus control	Synchronizing cycle: 1ms or its integral multiple The following running modes are supported: Profile Position; Profile Velocity Mode Profile Torque Mode; Homing Mode

## EA180C\P series servo motor, driver and cable matching table

Servo driver			Motor		
EA180	Model	Supply voltage	Motor	Power	Adaptable motor model
SIZE A	 EA180□-0R9-1 □ EA180□-1R6-1 □ EA180□-2R5-1 □	Single-phase AC220V		50W 100W 200W 400W	SES04-005-30-2FAY □ SES04-0R1-30-2FAY □ SES06-0R2-30-2FBY □ SES06-0R4-30-2FBY □
SIZE B	 EA180□-4R8-2 □ EA180□-6R2-2 □	Single-phase or three-phase AC220V		750W 1000W	SES08-0R7-30-2FBY □ SER13-1R0-10-2FBY □ SER13-1R0-20-2FBY □ SER13-1R0-30-2FBY □
SIZE C	 EA180□-5R6-3 □ EA180□-8R5-3 □ EA180□-013-3 □	Three-phase AC380V		850W 1.3kW 1.8kW	SES13-0R8-15-3FBY □ SES13-1R3-15-3FBY □ SES13-1R8-15-3FBY □
				2.9kW	
				1.5kW 2kW 3kW	SER13-1R5-10-3FBY □ SER13-1R5-20-3FBY □ SER13-1R5-30-3FBY □ SER13-2R0-20-3FBY □ SER13-2R0-30-3FBY □ SER13-3R0-20-3FBY □ SER13-3R0-30-3FBY □
SIZE D	 EA180□-011-2 □	Three-phase AC220V		1.5kW	SER13-1R5-10-2FBY □ SER13-1R5-20-2FBY □ SER13-1R5-30-2FBY □
SIZE E	 EA180□-017-3 □ EA180□-022-3 □ EA180□-028-3 □	Three-phase AV380V		4.4kW 5.5kW 7.5kW	SES18-4R4-15-3FBY □ SES18-5R5-15-3FBY □ SES18-7R5-15-3FBY □

## EA180C\P series servo motor, driver and cable matching table

Motor specification/model	Adaptable driver model	Encoder cable	Motor cable
SER13-1R0-10-2FBY □	EA180 □ -6R2-2B	A10-LS-H100-m (without battery) A10-LA-H100-m (with battery)	A18-LM-H115-m (Power cable for motor without brake) A18-LB-H115-m (Power cable for motor with a brake)
SER13-1R0-20-2FBY □			
SER13-1R0-30-2FBY □			
SER13-1R5-10-2FBY □	EA180 □ -011-2B		
SER13-1R5-20-2FBY □			
SER13-1R5-30-2FBY □			
SER13-1R5-10-3FBY □	EA180 □ -5R6-3B		
SER13-1R5-20-3FBY □			
SER13-1R5-30-3FBY □			
SER13-2R0-20-3FBY □	EA180 □ -8R5-3B		
SER13-2R0-30-3FBY □			
SER13-3R0-20-3FBY □			
SER13-3R0-30-3FBY □	EA180 □ -013-3B		

Note: When the encoder is used, A10-LA-xxx-m encoder cable must be selected and used if the absolute position should be memorized upon power off, and A10-LS-xxx-x encoder cable may be selected and used if the absolute position should be memorized without power off.

Motor specification/model	Adaptable driver model	Encoder cable	Motor cable
SES04-005-30-2FAY □	EA180 □ -0R9-1B	A10-LS-A000-m (without battery) A10-LA-A000-m (with battery)	A18-LM-A007-m (motor power cable) A10-LZ-A005-m (brake cable for motor with a brake)
SES04-0R1-30-2FAY □	EA180 □ -1R6-1B		
SES06-0R2-30-2FBY □	EA180 □ -2R5-1B		
SES06-0R4-30-2FBY □	EA180 □ -4R8-2B		
SES08-0R7-30-2FBY □	EA180 □ -6R2-2B		
SES08-1R0-30-2FBY □	EA180 □ -011-2B		
SES13-0R8-15-2FBY □	EA180 □ -5R6-3B	A18-LS-H400-m (without battery) A18-LA-H400-m (with battery)	A18-LM-M420-m (motor power cable) A18-LZ-H405-m (brake cable for motor with a brake)
SES13-0R8-15-3FBY □			
SES13-1R3-15-3FBY □			
SES13-1R8-15-3FBY □	EA180 □ -8R5-3B		
SES18-2R9-15-3FBY □	EA180 □ -013-3B		
SES18-3R6-20-3FBY □			
SES18-4R0-30-3FBY □			
SES18-4R4-15-3FBY □	EA180 □ -017-3B		
SES18-5R5-15-3FBY □	EA180 □ -022-3B		
SES18-7R5-15-3FBY □	EA180 □ -028-3B		

# EA300E servo driver

Single-phase 220V~240V 0.1~1kW

Three-phase 220V~240V 0.75~1.5kW

Three-phase 340V~460V 1.5~30kW



High-speed response



Bus control



High-precision positioning




Easy to use





## Connection between EA300 EtherCAT bus servo driver and peripheral device

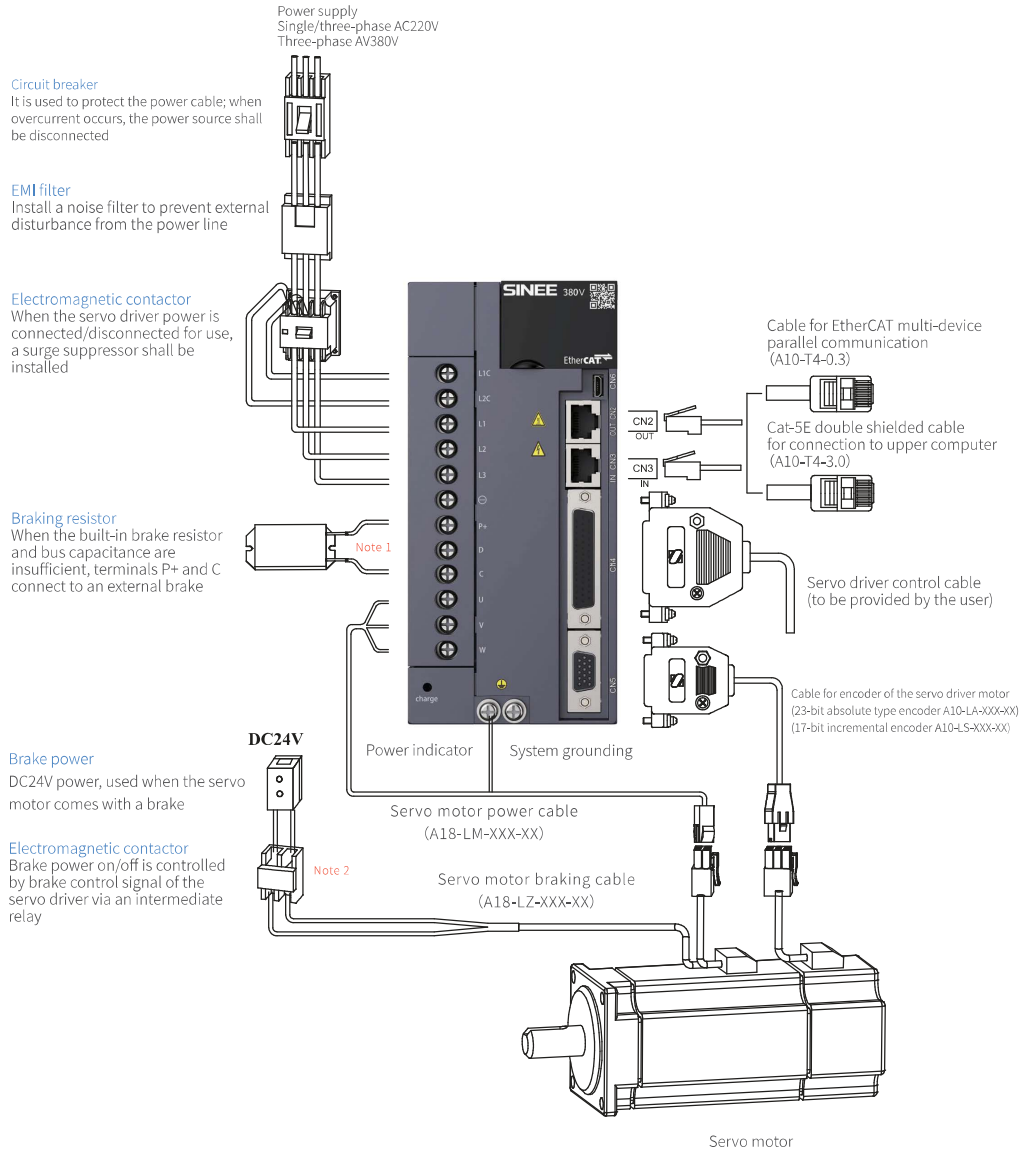

**Note 1:** When an external brake resistor is used, it is required to remove the short-circuiting piece between P+ and D, and correctly set the brake resistor parameter on the driver  
**Note 2:** It is strongly recommended that the servo motor brake is defined by the servo driver as the DO terminal of the BK function for control. The DO terminal of the servo driver shall have its load capacity used only for driving an intermediate relay other than an electromagnetic contactor.

## Terminal description of EA300 Ether CAT bus servo driver

**CN2, CN3 EtherCAT communication**

IN CN3		OUT CN2	
Pin number	Signal name	Pin number	Signal name
1	TD+	1	TD+
2	TD-	2	TD-
3	RD+	3	RD+
4		4	
5		5	
6	RD-	6	RD-
7		7	
8		8	

**CN4 control terminal**

Signal name	Pin number	Default function
DI1	5	P-OT
DI2	20	N-OT
DI3	4	ORPG
DI4	19	ALM-RST
DI5	3	GAIN-SEL
DI6	18	J-SEL
DI7	2	P-CLR
DI8	17	INHIBIT
COM+	21	DI input common positive terminal
+24V	25/40	Internal 24V power source, voltage range +20V~26V, maximum output current 200mA
COM	7/22/36	
DO1	8	S-RDY+
DO1-	37	S-RDY-
DO2	23	BK+
DO2-	38	BK-
DO3	9	COIN+
DO3-	39	COIN-
DO4	24	ALM+
DO4-	10	ALM-

**CN5 encoder terminal**

Pin number	Signal name
1	SD+
3	SD-
5	+5V
10	GND
Housing	PE

**Main circuit terminal**

Terminal marking	Terminal name
L1C, L2C	Control power input terminal
L1, L2, L3	AC power input terminal of main circuit
P+, D, C	Connecting terminal for an external braking resistor
P+, ⓪	Common DC bus terminal
U, V, W	Servo motor connecting terminal
PE	Grounding

## Specification of EA300 EtherCAT bus servo driver

Basic specification	Control method		IGBT: PWM control, sine-wave current drive type. 220V, 380V; single phase or three phase full-wave rectifier		
	Encoder feedback		17bit serial incremental encoder, 23bit serial absolute encoder		
	Front panel		5 keys, 5-digit LED display, main power CHARGE		
	Regenerative brake		Can be basically built-in and externally installed		
	Use conditions	Environment temperature		Working temperature 0~40°	
		Ambient humidity		Working/storage: ≤ 90%RH (without dew condensation)	
		Anti-vibration/ impact strength		4.9m/s <sup>2</sup> /19.6m/s <sup>2</sup>	
Protection level		IP10			
Pollution level		2 level			
Altitude		Less than 1,000m			
Cooling method		Fan cooling			
EtherCAT basic specification	Communication protocol		EtherCAT protocol		
	Support services		CoE(PDO, SDO)		
	Instruction synchronization cycle		1ms or its integral multiple		
	Synchronization method		DC-distributed clock		
	Physical layer		100BASE-TX		
	Baud rate		100Mbit/s		
	Duplex mode		Full duplex		
	Topological structure		Linear		
	Transmission medium		Shielded Cat-5E or better network cable		
	Transmission distance		Less than 50m between two nodes		
	Quantity of slave stations		No more than 100		
	EtherCAT frame length		44~1,498 bytes		
	Process data		44~1,498 bytes		
	Communication BER (bit error rate)		1/1000000000		
	EtherCAT slave specification	FMMU unit		4	
Storage synchronization management unit		4			
Process data RAM		4K			
Distributed clock		64 digits			
EEPROM capacity		16K			
Support running mode CIA402		Profile Position Mode Profile Velocity Mode Profile Torque Mode Interpolation Position Mode Cyclic Synchronous Position Mode Cyclic Synchronous Velocity Mode Cyclic Synchronous Torque Mode Homing Mode			
Performance	Speed-torque control mode	Speed fluctuation ratio	Load fluctuation At 0~100% load: Maximum 0.3%	At rated speed	
		Supply voltage change	At rated voltage ± 10%: Maximum 0.3%		
		Environment temperature	0~50°C : Maximum 0.3%		
	Position control mode	Speed regulation ratio	1:5000	Minimal speed/rated rotating speed of continuous stable operation under the rated load	
		Frequency bandwidth	1.0KHz (17bit and 23bit encoder)		
		Torque control accuracy	±3% (current repetition accuracy)		
		Soft start time setting	0~30s (acceleration and deceleration can be set respectively)		
Input/output signal	Digital input signal	Function allocation available	Servo enable, alarm resetting, pulse deviation counter clearing, speed command direction selection, position/speed multi-segment switching, internal command trigger, control mode switching, pulse disable, forward drive disable, reverse drive disable, forward inch, backward inch		
	Digital output signal	Function allocation available	Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, alarm output		
	Over-travel (OT) prevention function		Stopped immediately when P-OT and N-OT are activated.		
Built-in function	Electronic gear ratio		1.0 ≤ B/A ≤ 64000.0		
	Protective Function		Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, over-temperature, encoder alarm, braking resistor overload alarm, excessive position error, EEPROM alarm, abnormal communication etc.		
	RS232 communication		Status display, user parameter setting, monitoring display, alarm tracking display, JOG operation and automatic tuning operation, speed, torque instruction signal etc.		
	Others		Gain adjustment, alarm record, JOG operation		

## EA300E series servo motor, driver and cable matching table

		Servo driver			Motor		
		EA300E	Model	Supply voltage	Motor	Power	Adaptable motor model
SIZE A		EA300E-0R9-1B EA300E-1R6-1B EA300E-2R5-1B	Single-phase AC220V		50W 100W 200W 400W	SES04-005-30-2FAY □ SES04-0R1-30-2FAY □ SES06-0R2-30-2FAY □ SES06-0R4-30-2FAY □	
	SIZE B		EA300E-4R8-2B EA300E-6R2-2B	Single-phase or three-phase AC220V		750W 1000W	SES08-0R7-30-2FAY □ SES08-1R0-30-2FAY □ SES13-1R1-20-2FAY □
SIZE C		EA300E-5R6-3B EA300E-8R5-3B EA300E-013-3B	Three-phase AC380V		850W 1.3kW 1.7kW	SES13-0R8-15-3FAY □ SES13-1R3-15-3FAY □ SES13-1R7-30-3FAY □ SES13-1R1-20-3FAY □ SES13-1R7-20-3FAY □ SES13-2R6-30-3FAY □ SES13-1R8-15-3FAY □ SES13-2R4-20-3FAY □ SES13-3R6-30-3FAY □ SES18-2R9-15-3FAY □	
	SIZE C		EA300E-011-2B	Three-phase AC220V		0.8kW 1.1kW 1.7kW	SES13-1R1-20-2FAY □ SES13-0R8-15-2FAY □ SES13-1R7-30-2FAY □
SIZE D		EA300E-017-3B EA300E-022-3B EA300E-028-3B	Three-phase AC380V		4.4kW 5.5kW 7.5kW	SES18-4R4-15-3FAY □ SES18-5R5-15-3FAY □ SES18-7R5-15-3FAY □	
	SIZE D		EA300E-038-3B EA300E-052-3B EA300E-062-3B	Three-phase AC380V		11kW 13kW 15kW	SEC20-011-15-3FAY □ SEC20-011-20-3FAY □ SEC20-013-15-3FAY □ SEC20-015-15-3FAY □ SEC23-011-15-3FAY □
SIZE E		EA300E-038-3B EA300E-052-3B EA300E-062-3B	Three-phase AC380V		15kW 18kW 22kW 29kW	SEC23-015-15-3FAY □ SEC23-018-15-3FAY □ SEC23-022-15-3FAY □ SEC23-029-15-3FAY □	

# EA190 servo driver

Single-phase 220V~240V 0.1~1kW

- ✓

**Stable and reliable**
- 📡


**Bus control**
- 🎯

**High-precision positioning**
- 👉

**Easy to use**



## Connection between Series EA190E bus servo driver and peripheral device

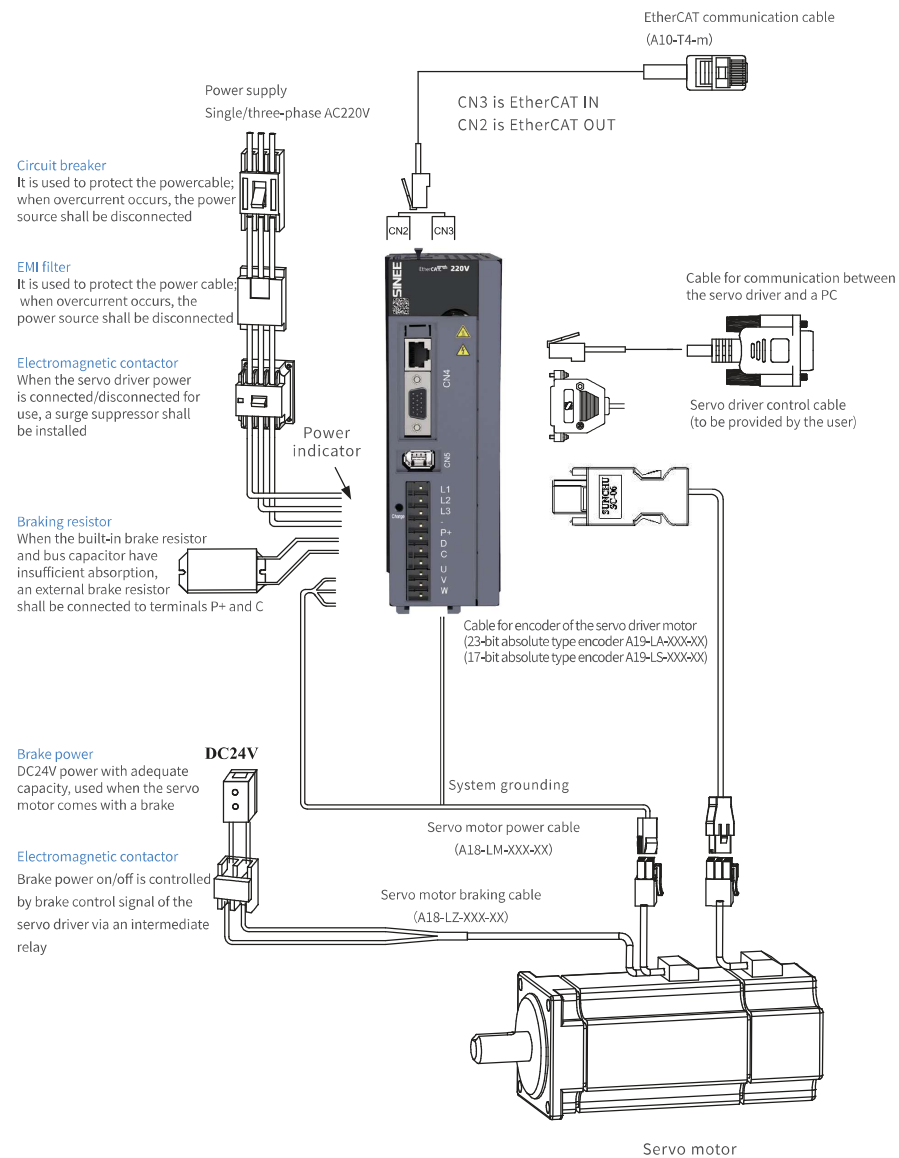


## Model description of EA190E bus servo driver

EA 190 X - 6R2 - 2 B - XX  
 ① ② ③ ④ ⑤ ⑥ ⑦

① Product Servo driver	④ Rated output current 0R9-0.9A 6R2-6.2A	⑥ Encoder type B: 17/23-bit serial encoder
② Series 190 series	⑤ Power voltage specification 1. Single-phase 220V 2. Single/three-phase 220V	⑦ Special specifications
③ Null: Pulse type E: EtherCAT bus type		

## Dimension diagram of EA190E bus servo driver

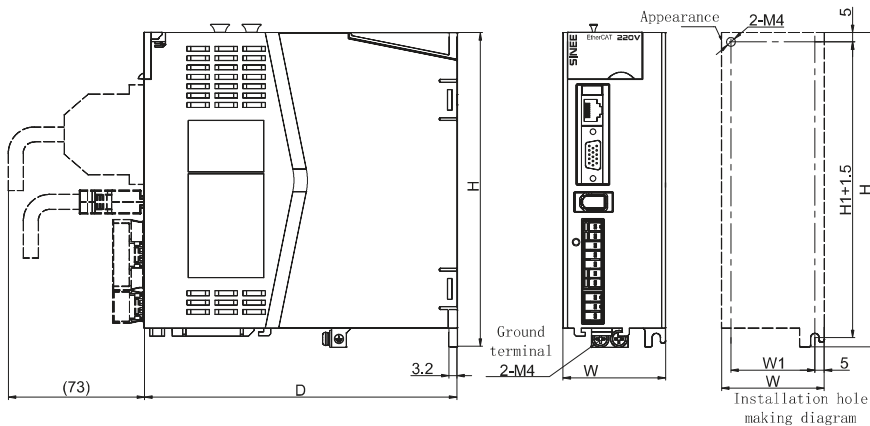






Model	D	H	W	W1	H1
EA190E-0R9-1B EA190E-1R6-1B EA190E-2R5-1B	150	168	44	34	158
EA190E-4R8-2B EA190E-6R2-2B	168	168	55	45	158

## Specification of Series EA190E bus servo driver

Basic specification	Control method	IGBT: PWM control, sine-wave current drive type		
	Front panel	5 keys, 5-digit LED display, main power CHARGE		
	Regenerative brake	Can be basically built-in and externally installed		
	Use conditions	Environment temperature	Working temperature 0~40°	
		Ambient humidity	Working/storage: ≤ 90%RH (without dew condensation)	
		Anti-vibration/ impact strength	4.9m/s <sup>2</sup> /19.6m/s <sup>2</sup>	
		Protection level	IP20	
		Pollution level	2 level	
	EtherCAT basic specification	Altitude	Less than 1,000m	
		Cooling method	Natural (specifications 0R9, 1R6, 2R5)/ fan cooling (specifications 4R8, 6R2)	
Communication protocol		EtherCAT protocol		
Support services		CoE(PDO, SDO)		
Instruction synchronization cycle		1ms or its integral multiple		
Synchronization method		DC- distributed clock		
Physical layer		100BASE-TX		
Baud rate		100Mbit/s		
Duplex mode		Full duplex		
Topological structure		Linear		
EtherCAT slave specification	Transmission medium	Shielded Cat-5E or better network cable		
	Transmission distance	Less than 50m between two nodes		
	Quantity of slave stations	No more than 100		
	EtherCAT frame length	44~1,498 bytes		
	Process data	44~1,498 bytes		
	Communication BER (bit error rate)	1/1000000000		
	FMMU unit	4		
	Storage synchronization management unit	4		
	Process data RAM	4K		
	Distributed clock	64 digits		
EtherCAT configuration unit	EEPROM capacity	16K		
	Support running mode CMA402	Profile Position Mode Profile Velocity Mode Profile Torque Mode Interpolation Position Mode Cyclic Synchronous Position Mode Cyclic Synchronous Velocity Mode Cyclic Synchronous Torque Mode Homing Mode		
Speed fluctuation ratio	Load fluctuation	At 0~100% load: Maximum 0.3%	At rated speed	
	Supply voltage change	At rated voltage ± 10%: Maximum 0.3%		
	Environment temperature	0~50°C : Maximum 0.3%		
Speed-torque control mode	Speed regulation ratio	1:5000	Minimal speed/rated rotating speed of continuous stable operation under the rated load	
	Frequency bandwidth	1.0KHz (17bit and 23bit encoder)		
	Torque control accuracy	±3% (current repetition accuracy)		
Position control mode	Soft start time setting	0~30s (acceleration and deceleration can be set respectively)	Resolution 0~100% (set resolution 1%)	
	Feedforward compensation	Resolution 0~100% (set resolution 1%)		
	Positioning completion width Min setting time	1~655,335 instruction units (set resolution to 1 instruction unit) 5ms (no load, from rated speed to positioning completion)		
Digital input signal	Function allocation available	Servo enable, alarm resetting, pulse deviation counter clearing, speed command direction selection, position/speed multi-segment switching, internal command trigger, control mode switching, forward drive disable, reverse drive disable, forward inch, backward inch		
Digital output signal	Function allocation available	Servo ready, brake output, motor rotation output, zero-speed signal, speed approach, speed reached, position approach, torque limit, rotating speed limit, warning output, alarm output		
Over-travel (OT) prevention function		Stopped immediately when P-OT and N-OT are activated.		
Electronic gear ratio		1.0 ≤ B/A ≤ 64000.0		
Protective Function		Over-voltage, under-voltage, over-speed, overheat, overload, over-speed, over-temperature, encoder alarm, braking resistor overload alarm, excessive position error, EEPROM alarm, abnormal communication etc.		
RS232 communication		Status display, user parameter setting, monitoring display, alarm tracking display, JOG operation and automatic tuning operation, speed, torque instruction signal etc.		
Others		Gain adjustment, alarm record, JOG operation		



 **EA190E series servo motor and driver matching table**

Servo driver			Motor		
EA190	Model	Supply voltage	Motor	Power	Adaptable motor model
SIZE A  	EA190E-0R9-1B EA190E-1R6-1B EA190E-2R5-1B	Single-phase AC220V		50W 100W 200W 400W	SES04-005-30-2HAY <input type="checkbox"/> SES04-0R1-30-2HAY <input type="checkbox"/> SES06-0R2-30-2HBY <input type="checkbox"/> SES06-0R4-30-2HBY <input type="checkbox"/>
					
SIZE B  	EA190E-4R8-2B EA190E-6R2-2B	Single-phase or three-phase AC220V		750W 1000W	SES08-0R7-30-2HBY <input type="checkbox"/> SES08-1R0-30-2HBY <input type="checkbox"/> SER13-1R0-10-2HBY <input type="checkbox"/> SER13-1R0-20-2HBY <input type="checkbox"/> SER13-1R0-30-2HBY <input type="checkbox"/> SES13-1R1-20-2HBY <input type="checkbox"/>

 **EA190E series servo motor and driver matching table**

Motor specification/model	Adaptable driver model	Encoder cable	Motor cable
SES04-005-30-2HAY <input type="checkbox"/>	EA190□-0R9-1B	A19-LS-A000-m (without battery) A19-LA-A000-m (with battery)	A18-LM-A007-m (motor power cable) A18-LZ-A005-m (brake cable for motor with a brake)
SES04-0R1-30-2HAY <input type="checkbox"/>	EA190□-1R6-1B		
SES06-0R2-30-2HBY <input type="checkbox"/>			
SES06-0R4-30-2HBY <input type="checkbox"/>	EA190□-2R5-1B		
SES08-0R7-30-2HBY <input type="checkbox"/>	EA190□-4R8-2B		
SES08-1R0-30-2HBY <input type="checkbox"/>	EA190□-6R2-2B	A19-LS-H100-m (without battery) A19-LA-H100-m (with battery)	Without brake: A18-LM-H115-m With brake: A18-LB-H115-m
SER13-1R0-10-2HBY <input type="checkbox"/>			
SER13-1R0-20-2HBY <input type="checkbox"/>			
SER13-1R0-30-2HBY <input type="checkbox"/>			





### Model description of SER/SES series servo motor

SES 08 - 0R7-30-2 F B Y 1-XX  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

① series	② flange size of the motor	③ rated output power of the motor
SER: Standard servo motor SES: High-performance servo motor	04: 40mm 06: 60mm 08: 80mm	005: 50W 0R1: 100W 0R2: 200W 0R4: 400W 0R7: 750W 1R0: 1000W 1R5: 1500W 2R0: 2000W 3R0: 3000W 4R4: 4400W 5R5: 5500W 7R5: 7500W
④ rated speed of the motor	⑦ inertia type	⑨ optional accessory
10: 1000rpm 15: 1500rpm 20: 2000rpm 25: 2500rpm 30: 3000rpm	11: 110mm 13: 130mm 18: 180mm 20: 200mm A: Low inertia B: Medium inertia C: High inertia	Null: No optional accessory 1: With holding brake (DC24V) 2: With oil seal 3: With holding brake and oil seal 4: With fans 5: With brake and fans
⑤ voltage level	⑧ bit Shaft end	⑩ special specification
2: 220V 3: 380V	X: Optical axis, without key slot <sup>1</sup> Y: With U-shaped key slot and screw hole <sup>2</sup> Z: With double-circular key slot and screw hole	
⑥ encoder type		
A: 2500ppr incremental encoder B: 17bit incremental encode H: 17bit incremental magnetic encoder F: 23bit absolute type encoder K: 17bit absolute type magnetic encoder		

Note 1: Generally not provided. Can be used as optical axis when the key is taken off.  
 Note 2: Partial varieties can be of double-circular key slots; except for motors with flange 130, the key width and height are the same with the U-shaped key slots.  
 Note 3: Random combination of various elements above is not available.

### Common features of SER/SES series servo motors

Motor insulation level	FClass
Withstand voltage of insulation	1500V 60s
Insulation resistance	DC500V, above 10MΩ
Thermal resistance level of the motor	B
Protection level	Fully-closed self-cooling type, IP65 (except for the shaft running-through part)
Service environment	Ambient temperature 0-40°, RH 20%-80% (without dew condensation)
Installation method	Flange installation
Rotation direction	Rotate counterclockwise (CCW) under a forward command if viewed from the load side

### Holding brake specification


Motor flange size	Rated torque of motor	Rated voltage	Static friction torque	Rated power	Closing voltage	Release voltage	Set the closing action time	Set the release action time
mm	Nm	VDC	Nm	W	VDC	VDC	ms	ms
40	0.32 ≤	24	0.35	3.5	22	1.5	63	55
60	0.64~1.27		2	6.3				
80	1.3~3.5		4	10.4				
86	3.2~3.5		4	10.4				
110	2~6		10	11.6				
130	3.2~15		20	19.5				
180	17~35		44	25				
180	≥ 36		74	45				
200	35~95.5		120	95				
230	70~184		200	120				
							87	72
							110	95
							140	120
							152	130
							165	140
							230	180

- The holding brake is used to keep the motor locked after stop, and cannot be used for braking.
- A 24V power source shall be provided by the user for the holding brake, and it is prohibited to connect the holding brake to the 24V power in the servo driver. The 24V power source shall have a capacity that is at least 1.5 times the rated power of the holding brake (excluding capacity of any 24V power source for other devices).
- The action time of the holding brake may differ for different circuits. The time provided above is only for reference, and the actual time depends on the physical product.
- Static friction torque refers to the static friction torque provided by the brake when the motor is static; if there is external impact, keeping the motor static cannot be assured.



## Installation dimension of SER series servo motor

- Dimensions of SER series servo motors with flanges 110 and 130

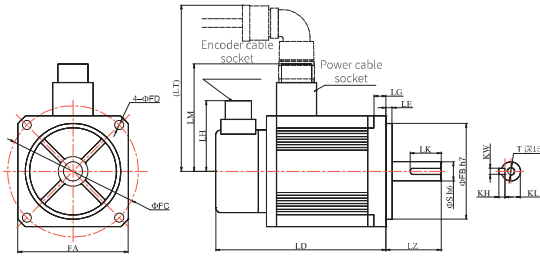


Motor specification/model	LD (mm)	FA (mm)	FB (mm)	FC (mm)	FD (mm)	LZ (mm)	LK (mm)	LE (mm)	LG (mm)	LH (mm)	LM (mm)	LT (mm)	S	KL	KH	KW	T	Quality (kg)	Cable connector model
SER11-1R0-20-2 □ B □ □	205.5 (260.5)	110	95	130	9	55	31	6	9	-	107	176	19	15.5	6	6	M6	6.42 (7.88)	Without brake: Aviation plug YD28K4T With brake: Aviation plug YD28K7T Aviation plug YD28K45TS
SER11-1R2-30-2 □ B □ □	185.5 (240.5)	110	95	130	9	55	31	6	9	-	107	176	19	15.5	6	6	M6	5.46 (6.92)	
SER11-1R8-30-2 □ B □ □	218.5 (273.5)	110	95	130	9	55	31	6	9	-	107	176	19	15.5	6	6	M6	7.26 (8.72)	
SER13-1R0-10-2 □ B □ □	215 (270)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	10.12 (11.67)	
SER13-1R0-20-2 □ B □ □	165 (220)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	6.41 (7.94)	
SER13-1R0-30-2 □ B □ □	150 (205)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	5.31 (6.89)	
SER13-1R5-10-□ B □ □	265 (320)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	13.82 (15.40)	
SER13-1R5-20-□ B □ □	185 (240)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	7.89 (9.43)	
SER13-1R5-30-□ B □ □	165 (220)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	6.40 (7.96)	
SER13-2R0-20-3 □ B □ □	215 (270)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	10.12 (11.67)	
SER13-2R0-30-3 □ B □ □	185 (240)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	7.85 (9.47)	
SER13-3R0-20-3 □ B □ □	265 (320)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	13.81 (15.34)	
SER13-3R0-30-3 □ B □ □	215 (270)	130	110	145	9	58	45	6	12	-	117	186	22	18	7	8	M6	10.12 (11.67)	



## Installation dimension of SES series servo motor


- Dimensions of SES series servo motors with flanges 40, 60 and 80

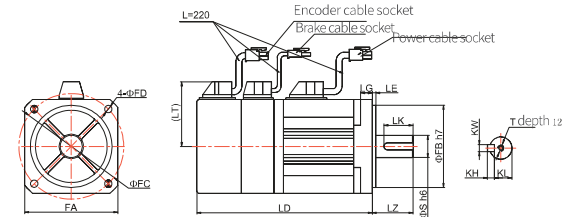

Motor specification/model	LD (mm)	FA (mm)	FB (mm)	FC (mm)	FD (mm)	LZ (mm)	LK (mm)	LE (mm)	LG (mm)	LT (mm)	S (mm)	KL (mm)	KH (mm)	KW (mm)	T (mm)	Quality (kg)	Cable connector model
SES04-005-30-2 □ AY □	85 (119.5)	40	30	46	4.5	25.5	14	3	8	37	8	6.3	3	3	M3	0.4 (0.6)	Power side: 172159-1 Brake side: 172157-1 Recd: 170362-1 Encoder side: 172161-1 Recd: 170361-1
SES04-0R1-30-2 □ AY □	100 (133.5)	40	30	46	4.5	25.5	14	3	8	37	8	6.3	3	3	M3	0.47 (0.67)	
SES06-0R2-30-2 □ BY □	93.7 (120.2)	60	50	70	4.5	30	20	3	8	48	14	8.5	4	4	M5	1.01 (1.4)	
SES06-0R4-30-2 □ BY □	110.7 (137.2)	60	50	70	4.5	30	25	3	8	48	14	11	5	5	M5	1.37 (1.78)	
SES08-0R7-30-2 □ BY □	122.4 (150.6)	80	70	90	6.3	35	25	3	10	58	19	15.5	6	6	M5	2.4 (2.8)	
SES08-1R0-30-2 □ BY □	136.4 (164.6)	80	70	90	6.3	35	25	3	10	58	19	15.5	6	6	M5	3.0 (3.4)	

Note: An SES04 motor has two installation holes at the two shadowed locations as shown in the figure

- Dimensions of SES series servo motors with flanges 130 and 180

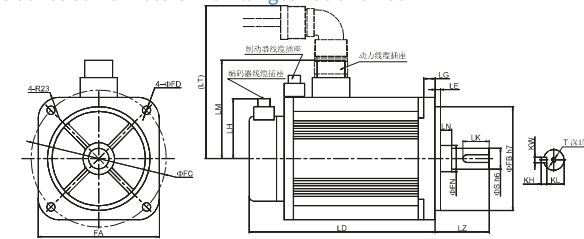

Motor specification/model	LD (mm)	FA (mm)	FB (mm)	FC (mm)	FD (mm)	LZ (mm)	LK (mm)	LE (mm)	LG (mm)	LH (mm)	LM (mm)	LT (mm)	LN (mm)	FN (mm)	S (mm)	KL (mm)	KH (mm)	KW (mm)	T (mm)	Quality (kg)	Cable connector model
SES13-0R8-15-3FBY □	150.9 (183.4)	130	110	145	9	58	27.5	6	12	63.3	105	230	12	28	19	16	5	5	M5	5.83 (17.8)	Power side: M510861-500 Brake side: M510871-500
SES13-1R7-30-3FBY □	166.9 (199.4)	130	110	145	9	58	28	6	12	63.3	105	230	12	28	22	18.5	6	6	M5	7.25 (9.3)	
SES13-1R3-15-3FBY □	184.9 (217.4)	130	110	145	9	58	29	6	12	63.3	105	230	12	28	24	20	8	8	M5	8.8 (10.8)	
SES18-2R6-15-3FBY □	173.3 (231)	180	114.3	200	13.5	79	65	3.2	18	63.3	135.5	230	0	35	35	30	8	10	M12	13 (19.5)	Power side: M1210861-275 Brake side: M1210871-275
SES18-3R6-20-3FBY □	197.3 (324)	180	114.3	200	13.5	79	65	3.2	18	63.3	135.5	230	0	35	35	30	8	10	M12	17.5 (24)	
SES18-4R4-15-3FBY □	197.3 (324)	180	114.3	200	13.5	79	65	3.2	18	63.3	135.5	230	0	35	35	30	8	10	M12	17.5 (24)	Power side: M1210861-275 Brake side: M1210871-275
SES18-5R5-15-3FBY □	236.3 (278)	180	114.3	200	13.5	113	96	3.2	18	114.3	145.5	230	0	42	42	37	10	12	M16	22 (27.8)	
SES18-7R5-15-3FBY □	282.3 (324)	180	114.3	200	13.5	113	96	3.2	18	114.3	145.5	230	0	42	42	37	10	12	M16	29.5 (35)	

## Pin distribution of the motor-side power terminal


Connector type	Pin distribution	Pin number	Function definition
TE 172159-1		1	U
		2	V
		3	W
		4	PE
YD28K4TS The diameter of contact pairs is 3*φ3.5mm +1*φ2.5mm		1	PE
		2	U
		3	V
		4	W
The diameter of YD28K7TS contact pairs is 7*φ2.5mm		1	PE
		2	U
		3	V
		4	W
		5	24V (brake)
		6	0V (brake)
		7	Null
MS3105A18-10S MS3108A22-22S MS3105A32-17S		A	U
		B	V
		C	W
		D	PE

## Pin distribution of the motor-side encoder terminal



Connector type	TE 172163-1		TE 172161-1		YD28K15TS		CM10-SP10S-MD		
	Signal	Pin number	Signal	Pin number	Signal	Pin number	Signal	Pin number	
2500ppr incremental encoder	A+	9	V+	10	A+	4	V+	11	
	A-	13	V-	12	A-	7	V-	14	
	B+	4	W+	11	B+	5	W+	12	
	B-	14	W-	15	B-	8	W-	15	
	Z+	7	+5V	2	Z+	6	+5V	2	
	Z-	5	GND	3	Z-	9	GND	3	
	U+	6	PE	1	U+	10	PE	1	
U-	8			U-	13				
17/23-bit encoder		Signal	Pin number		Signal	Pin number		Signal	Pin number
		+5V	1		+5V	2		+5V	4
		GND	2		GND	3		GND	9
		SD+	5		SD+	4		SD+	1
		SD-	6		SD-	7		SD-	2
		VD+	3		VD+	14		VD+	6
	VD-	4		VD-	15		VD-	5	
		PE	9		PE	1		PE	10

## Torque-speed characteristic curve of Series SER/SES servo motors


### Torque-speed characteristic curve of 40, 60 & 80 servo motors with flanges

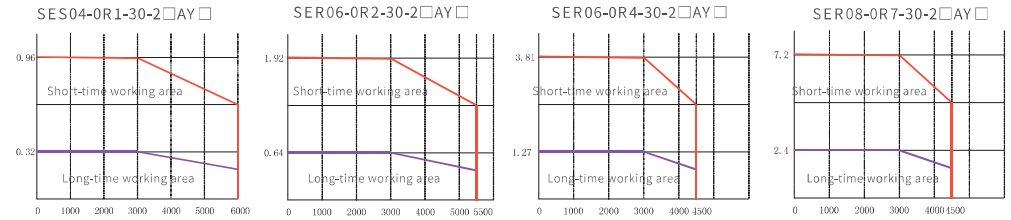

### Torque-speed characteristic curve of 130 servo motors with flanges

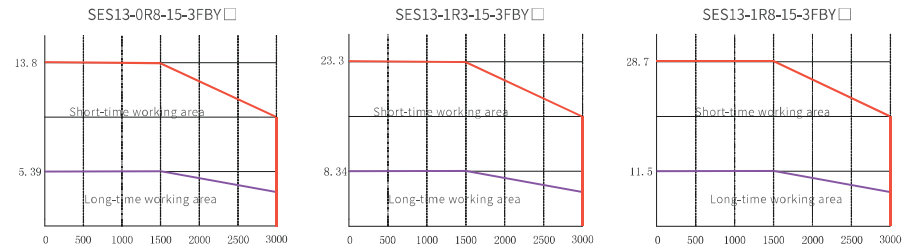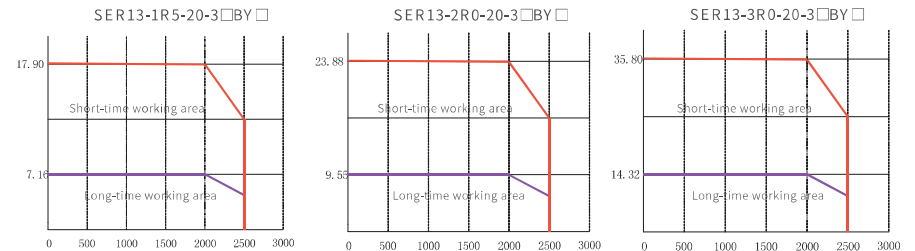

### Torque-speed characteristic curve of 180 servo motors with flanges

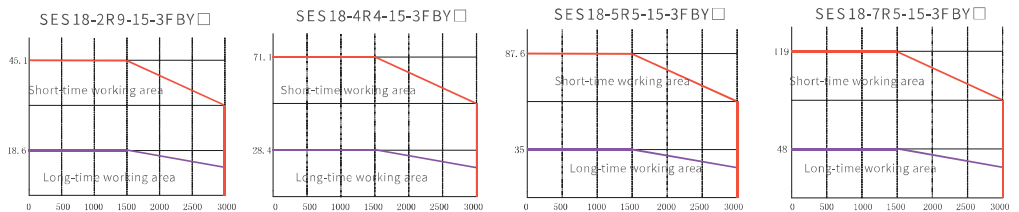





 **Parameter table of SER series servo motor**

Servo motor model	Voltage class V	Rated power W	Rated rotating speed rpm	Maximum rotating speed rpm	Rated current A	Maximum instantaneous current A	Rated torque Nm	Maximum instantaneous torque Nm	Torque constant Nm/A	Rotating inertia Kg.cm <sup>2</sup> *10 <sup>-4</sup>	Adaptable driver
SER11-1R0-20-2 <input type="checkbox"/> BY <input type="checkbox"/>	AC220V	1000	2000	2500	5.0	15.0	5.0	15.00	1.0	7.22(7.24)	6R2-2 <input type="checkbox"/>
SER11-1R2-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		1200	3000	3500	4.9	14.7	4.0	12.00	0.82	5.54(5.56)	
SER11-1R8-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		1800	3000	3500	6.6	19.8	6.0	18.00	0.91	8.55(8.57)	011-2 <input type="checkbox"/>
SER13-1R0-10-2 <input type="checkbox"/> BY <input type="checkbox"/>	AC220V	1000	1000	1500	4.72	14.2	9.55	28.65	2.02	17.14(17.16)	6R2-2 <input type="checkbox"/>
SER13-1R0-20-2 <input type="checkbox"/> BY <input type="checkbox"/>			2000	2500	4.72	14.2	4.77	14.31	1.01	8.71(8.73)	
SER13-1R0-30-2 <input type="checkbox"/> BY <input type="checkbox"/>			3000	3500	4.96	14.9	3.27	9.81	0.66	6.17(6.19)	
SER13-1R5-10-3 <input type="checkbox"/> BY <input type="checkbox"/>	AC380	1500	1000	1500	5.4	13.5	14.32	35.80	2.65	25.58(25.6)	5R6-3 <input type="checkbox"/>
SER13-1R5-20-3 <input type="checkbox"/> BY <input type="checkbox"/>			2000	2500	4.1	10.3	7.16	17.90	1.75	12.08(12.1)	
SER13-1R5-30-3 <input type="checkbox"/> BY <input type="checkbox"/>			3000	3500	4.2	10.5	4.78	11.95	1.14	8.71(8.73)	
SER13-2R0-20-3 <input type="checkbox"/> BY <input type="checkbox"/>	AC380	2000	2000	2500	6.5	16.3	9.55	23.88	1.47	17.14(17.16)	8R5-3 <input type="checkbox"/>
SER13-2R0-30-3 <input type="checkbox"/> BY <input type="checkbox"/>			3000	3500	5.8	14.5	6.5	16.25	1.12	12.08(12.1)	
SER13-3R0-20-3 <input type="checkbox"/> BY <input type="checkbox"/>			3000	2000	2000	2500	9.6	24.0	14.32	35.80	1.49
SER13-3R0-30-3 <input type="checkbox"/> BY <input type="checkbox"/>	3000	3500			8.3	20.8	9.55	23.88	1.15	17.14(17.16)	

Note 1: Value in ( ) is the value in case a brake is provided;  
 2: When an oil seal is provided, it shall be derated by 10% for use

 **Parameter table of SES series servo motor**

Servo motor model	Voltage class V	Rated power W	Rated rotating speed rpm	Maximum rotating speed rpm	Rated current A	Maximum instantaneous current A	Rated torque Nm	Maximum instantaneous torque Nm	Torque constant Nm/A	Rotating inertia Kg.cm <sup>2</sup> *10 <sup>-4</sup>	Adaptable driver EA180-	
SES04-005-30-2 <input type="checkbox"/> AY <input type="checkbox"/>	AC 220	50	3000	6000	0.6	1.8	0.16	0.48	0.26	0.02(0.02)	0R9-1 <input type="checkbox"/>	
SES04-0R1-30-2 <input type="checkbox"/> AY <input type="checkbox"/>		100	3000	6000	1.1	3.3	0.32	0.96	0.29	0.04(0.04)	1R6-1 <input type="checkbox"/>	
SES06-0R2-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		200	3000	6000	1.6	4.8	0.64	1.92	0.44	0.29(0.34)	1R6-1 <input type="checkbox"/>	
SES06-0R4-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		400	3000	6000	2.3	6.9	1.27	3.81	0.59	0.56(0.61)	2R5-1 <input type="checkbox"/>	
SES08-0R7-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		750	3000	5000	4.0	12	2.4	7.2	0.653	1.56(1.66)	4R8-2 <input type="checkbox"/>	
SES08-1R0-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		1000	3000	5000	6.0	18	3.2	9.6	0.538	2.03(2.13)	6R2-2 <input type="checkbox"/>	
SES13-0R8-15-2FBY <input type="checkbox"/>		850	1500	3000	6.9	17	5.39	13.8	1.72	13.95(16.1)	011-2B	
SES13-1R1-20-2 <input type="checkbox"/> BY <input type="checkbox"/>		1100	2000	4000	7.2	18.9	5.39	14.15	0.75	13.95(16.1)	011-2B	
SES13-1R7-30-2 <input type="checkbox"/> BY <input type="checkbox"/>		1700	3000	5000	9.2	24.1	5.39	14.15	0.69	13.95(16.1)	011-2B	
SES13-0R8-15-3FBY <input type="checkbox"/>		850	1500	3000	3.5	8.5	5.39	13.8	1.72	13.95(16.1)	5R6-3B	
SES13-1R7-30-3 <input type="checkbox"/> BY <input type="checkbox"/>		1700	3000	5000	5.3	13.9	5.39	14.15	1.02	13.95(16.1)	5R6-3B	
SES13-1R1-20-3 <input type="checkbox"/> BY <input type="checkbox"/>		1100	2000	4000	4.3	11.3	5.39	14.15	1.25	13.95(16.1)	5R6-3B	
SES13-1R3-15-3FBY <input type="checkbox"/>		1300	1500	3000	5.4	14	8.34	23.3	1.78	19.95(22.1)	5R6-3B	
SES13-1R7-30-3 <input type="checkbox"/> BY <input type="checkbox"/>		1700	2000	4000	7.5	22.5	8.34	25	1.11	19.95(22.1)	8R5-3B	
SES13-2R6-30-3 <input type="checkbox"/> BY <input type="checkbox"/>	2600	3000	5000	8	22.35	8.34	23.3	1.04	19.95(22.1)	8R5-3B		
SES13-1R8-15-3FBY <input type="checkbox"/>	1800	1500	3000	8.4	20	11.5	28.7	1.5	26.1(28.1)	8R5-3B		
SES13-2R4-20-3 <input type="checkbox"/> BY <input type="checkbox"/>	2400	2000	4000	8.9	22.2	11.5	28.7	1.29	26.1(28.1)	013-3B		
SES13-3R6-30-3 <input type="checkbox"/> BY <input type="checkbox"/>	3600	3000	5000	10.8	27	11.5	28.7	1.07	26.1(28.1)	013-3B		
SES18-2R9-15-3FBY <input type="checkbox"/>	2900	1500	3000	11.9	28	18.6	45.1	1.7	46.0(53.9)	013-3B		
SES18-4R4-15-3FBY <input type="checkbox"/>	4400			16.5	40.5	28.4	71.1	1.93	67.5(75.4)	017-3B		
SES18-5R5-15-3FBY <input type="checkbox"/>	5500			20.8	52	35	87.6	1.8	89.0(96.9)	022-3B		
SES18-7R5-15-3FBY <input type="checkbox"/>	7500			25.7	65	48	119	1.92	125.0(133)	028-3B		
SES18-3R6-20-3FBY <input type="checkbox"/>	3600			2000	2500	9.5	28.5	16.7	50.16	2.1	46.0(53.9)	013-3B

Note: 1: Value in ( ) is the value in case a brake is provided;

# NCN machine tool

## © Industrial demand

Machines and equipment have become a part of human production and life. Where machines and equipment are used, machine tools are needed. Machine tools can machine parts with high precision and surface roughness requirements by casting, forging, welding, pressing, extruding or otherwise for manufacture of equipment. Manufacturing is a pillar industry for economic development of a country. Strength of the machine tool industry is one of the key indicators that reflect the manufacturing development level of the country. CNC machines tools have become a mainstream development trend of modern machine tools due to their high precision, good flexibility, high work efficiency, compound functions, intelligent control and other features.

## © Highlights of the scheme

- Adaptable to multiple motor types
- Different types of interfaces for connection to CNC systems of different brands
- Accommodated to multiple types of machining processes: 6,000~24,000 r high-speed precision machining, C-axis function, low-speed heavy cutting machining, rigid tapping, independent positioning function, spindle swing function

## © Scheme composition

- Multi-axis synchronous control approach
- Electric screw press approach





# Semiconductor, silicon wafer machining

## ◎ Industrial demand

Multi wire cutting is a new cutting method that can cut semiconductor or other hard and brittle materials (such as silicon plate, sapphire, ruby, neodymium iron boron, ferrite and so on) into several hundred of thin sheets at a time by high-speed reciprocating movement of metal wires. It has become a major method of cutting silicon wafers and magnetic materials.

## ◎ Highlights of the scheme

- It has high work efficiency, capable of producing several hundred of products at a time
- It has high precision and small cutting loss in product machining
- It features a constant swing bar output torque, steady tension of metal wires and swing bar jitter angle of less than  $\pm 1^\circ$
- Stably operating FPC can realize automatic deviation rectification and direction switching
- Spindles are directly coupled to realize synchronous closed-loop control between the spindles without additional linking mechanism and fast dynamic response
- The maximum linear cutting speed is 2000 m/min

## ◎ Scheme composition

Comprising three parts, i.e. touch screen, motion controller and servo motor





# Stage lighting

## ◎ Industrial demand

As consumption level constantly improves and recreational activities diversify, new performance venues and forms emerge one after another in the market, large-scale stage machinery and theater equipment of high technology are introduced, and equipment used is generally becoming more complicated. To render spectators better visual experience requires diversified stage performances and innovation, which can not only promote creativity conversion and art presentation, but also enhance the overall effect of stage scenes and treat the spectators with a feast of aesthetic enjoyment. SINEE stage control systems, featuring high safety, diversity, flexibility and easy operation, are powerful aids for stage scenes and actions.

## ◎ Highlights of the scheme

- Support multi-mode switch control
- Support multiple protection functions
- Easy and simple cable connection
- Support storage of massive formula data with stable communication

## ◎ Scheme composition

EA180 series servo system