# Sage Electric Spa Treatment Table Specifications Sheet



## SKIN+ACT

Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640

#### **NOTICE**

No part of this document may be photocopied, reproduced, or translated into any other language without prior written consent of Spa and Equipment/SkinAct.

The information in this document is subject to change without notice at any time and should not be construed as a commitment by Spa and Equipment/SkinAct.

Spa and Equipment/SkinAct assumes no responsibility for any errors that may be in this document, nor does it make expressed or implied warranty with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Spa and Equipment/SkinAct shall not be liable for incidental or consequential damages arising out of the furnishing, performance, or use of this document and the program material which it describes.

SKIN+ACT

Toll Free: 1.800.418.0830

www.skinact.com www.spaandequipment.com

International: 818.834.6640

# Measurements






# Measurements 28.5" 10.5" 16" 21"



# Measurements

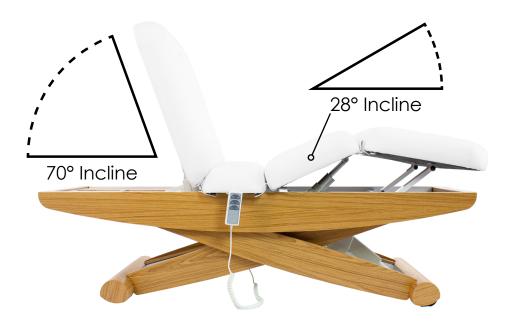



## **Highlights**

#### **Movements:**

- Electric backrest angle adjustment
- Electric leg rest angle adjustment
- Electric height adjustment
- Manual rolling wheels for easy table movement

#### **Dimensions/Specifications:**

• Length: 78"

• Width: 30"

• Heights: 23" – 36.5"

BASE ONLY Dimensions: 49.5"L x 24.5"W

• Backrest angle: 0° flat to 70° incline

• Center section: 0° flat to 28°

• Weight: 200 lbs

• Capacity of 330 lbs

• Cushion thickness: 4"

• Color available: White

- High-quality, easy-to-clean PU upholstery
- Ultra-soft, high-comfort padding
- Natural wood finish on scissor-style base
- Face-hole for when clients are face down
- Hidden wheels for easy table movement

#### Warranty:

1-year warranty

<sup>\*</sup> All height measurements are from the ground to the top of the cushion \*

<sup>\*\*</sup> All measurements have a 0.25 to 0.75 inch tolerance \*\*