

Assembly Instructions

8ft Walk-in Table



Thank you for choosing **A&L Furniture Co.**We hope that this piece brings you many years of enjoyment!

For help with assembling your furniture, or if you have missing hardware, please email us at help@aandlfurniture.com or call us at 866-896-5747

PARTS (included)

- A Table Top (1)
- B Table Leg Assemblies (2)
- C Bench Tops (4)
- D 1"x5½"x14½" Bench Leg Supports (8)
- E) 1"x5½"x32" Bench Bottoms (4)

HARDWARE (included)

2" Screws (62)


Square Drive Bit (1)

TOOLS NEEDED

Power drill or screwdriver


STEP 1

Assemble the 4 bench legs. Take 2 leg supports and attach to a bench bottom. Put two 2" screws in the predrilled holes in each end of the bench bottom and screw into one end of the leg supports. (See photo 1.)

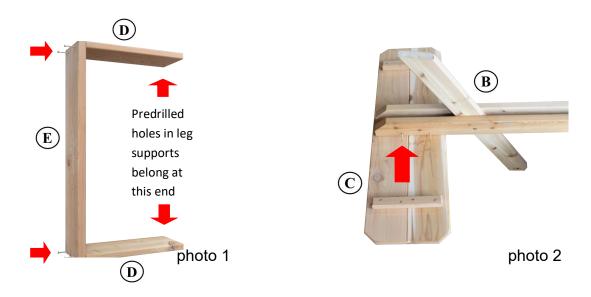

STEP 2


Unfold a table leg assembly & place upside down on a table. (See photo 2.) Take a bench top & place upside down with the center 2x2 between the 2x4 table leg support beams. Attach with two 2" screws on each side. (See photos 2 & 3.)




Keep 2x2 even with leg supports

STEP 3

Now take the bench leg assemblies in Step 1 and place them on the seat. Center with the 2x2 on the bench top. Attach with two 2" screws on each end. (See photos 4 & 5.)






Center on 2x2 strips

STEP 4

Fold the center leg down and attach to the bench bottom. Put one 2" screw in the predrilled hole in the center of the bench bottom and screw up into the leg. (See photo 6.)








photo 7

STEP 5

Set the assembled leg assemblies on the floor side by side. Space them approximately 14" apart between the bench seats. Place the table top on the 4 legs and latch the legs into the 4 notches between the 2x2 braces underneath the table top. Put one 2" screw into each 2x2 and screw into the top of the legs. (See photo 7.)