

Assembly Instructions


LCC-207 Mission Glider

Required Tools:

- Hammer
- Cordless Drill
- #2 Square Drive bit
- 9/16" and 7/16" Wrench or Socket

Hardware:

- (4) 1/4" x 2" bolts
- (2) 1/4" x 4" bolts
- (2) 1/4" x 3 1/2" bolts
- (8) 1/4" Flange Nuts
- (4) Glider Hangers
- (8) 3/8" x 2 1/2" bolts
- (16) 3/8" washers
- (8) 3/8" locknuts
- (4) 1 1/4" screws
- (8) 3" screws

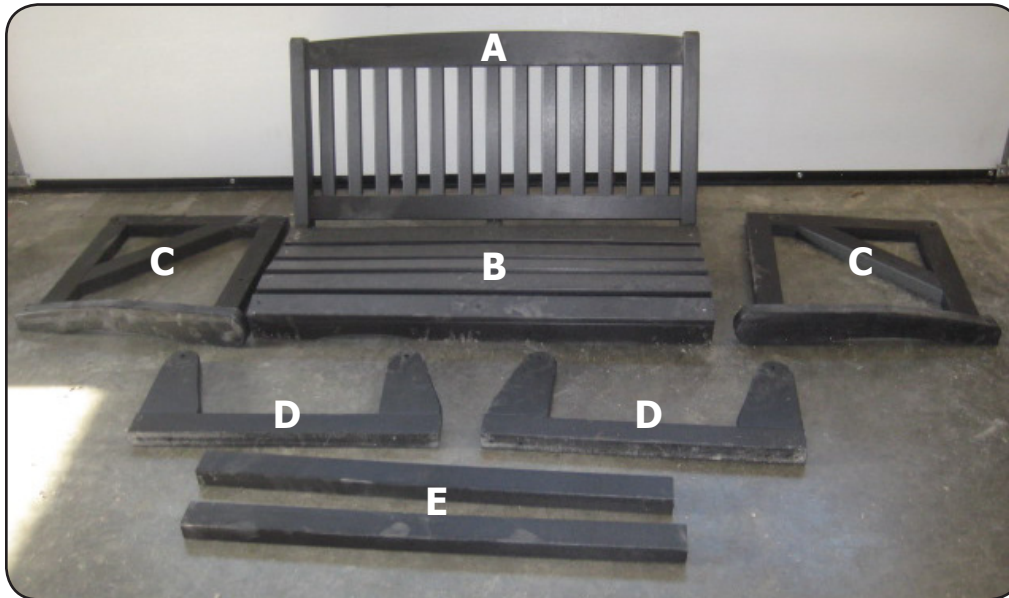

Step 1

Position seat (B) and back (A) as shown and fasten outside supports with (4) 2" bolts & nuts. Use 1/2" x 1 1/2" x 5" connector block provided to fasten center seat support to the back using (4) 1 1/4" screws.



Step 2

Fasten the arm leg assembly (C) in position shown using 4" bolt & nut in back and 3 1/2" bolt & nut in front. Repeat other side. Note: left & right.



www.wildridge.com

330-893-4212


Assembly Instructions

LCC-207 Mission Glider



Step 3

Position glider base assembly (D) and base supports (E) as shown and fasten with (8) 3" screws through counter sink holes provided.

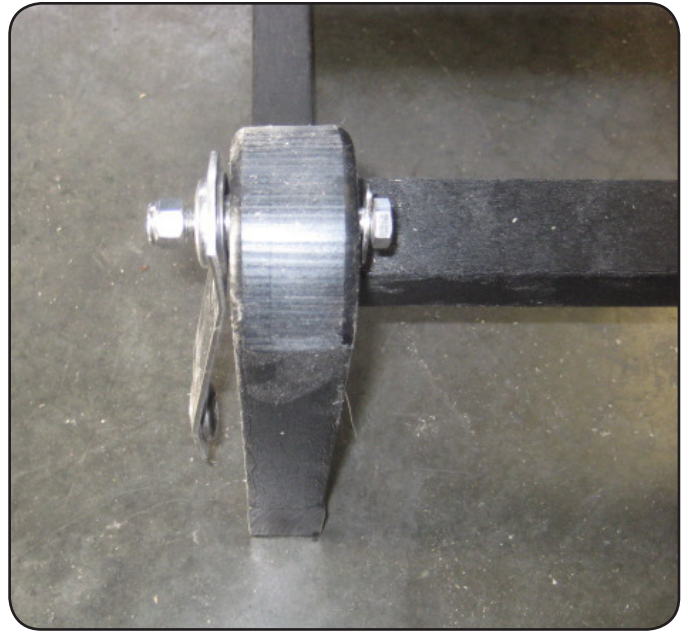

Step 4

Now mount glider hangers on base as shown using (4) 3/8" x 2 1/2" bolts with 3/8" washer & nuts. First slide a washer on bolt and push through hole provided from inside to outside. Add another washer then hang a glider hanger on bolt with curve away from bottom of base as shown. Now fasten with 3/8" locknut tightly on bolt. Repeat other 3 sides.



Step 5

Set the seat assembly over the base and fasten bottom of glider hangers to leg assembly with (4) 2 1/2" bolts, washers and nuts. Note: Upright base pieces are straight up and down in front and on an angle in back.



Complete



www.wildridge.com

330-893-4212