


# Assembly Instructions

## LCC-209 Classic Glider

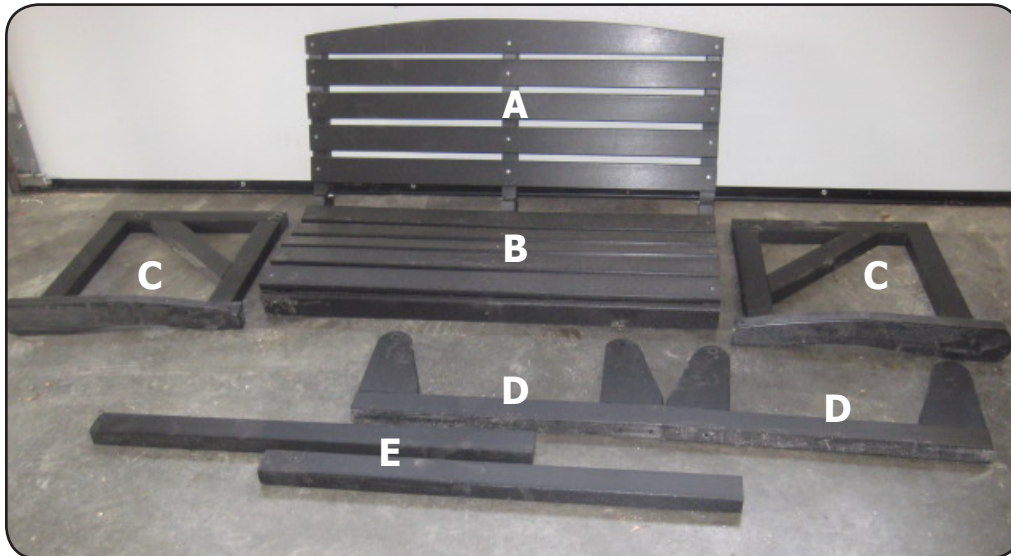

### Required Tools:

- Hammer
- Cordless Drill
- #2 Square Drive bit
- 9/16" and 7/16" Wrench or Socket

### Hardware:

- (6) 1/4" x 2" bolts
- (16) 3/8" Washers
- (2) 1/4" x 4" bolts
- (8) 3/8" Locknuts
- (2) 1/4" x 3 1/2" bolts
- (4) Glider Hangers
- (10) 1/4" Flange Nuts
- (8) 3" Screws
- (8) 3/8" x 2 1/2" Bolts



### Step 1

Position Seat (B) and back (A) as shown and fasten with (6) 2" bolts and nuts.



### Step 2

Fasten the arm leg (C) in position shown using 4" bolt and nut in back and 3 1/2" bolt and nut in front. Repeat other side. NOTE left & right.



[www.wildridge.com](http://www.wildridge.com)

330-893-4212


# Assembly Instructions

## LCC-209 Classic Glider



### Step 3

Position glider base assembly (D) and base supports (E) as shown and fasten with (8) 3" screws through counter sink holes provided.

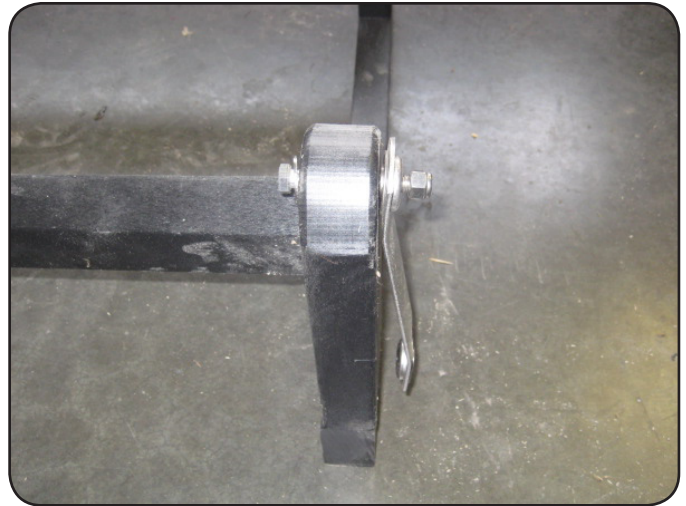

### Step 4

Now mount glider hangers on base as shown using (4) 3/8" x 2 1/2" bolts with 3/8" washer and nuts. First slide a washer on bolt and push through hole provided from inside to outside. Add another washer then hang glider hanger on bolt with glider bracket. Hang glider bracket with curve away from bottom, then fasten with 3/8" locknuts.



### Step 5

Set the seat assembly over the base and fasten bottom of glider hangers to leg assembly with (4) 2 1/2" bolts, washers, and nuts. NOTE: upright base pieces are straight up and down in front and on an angle in back.



**Complete!**



[www.wildridge.com](http://www.wildridge.com)

330-893-4212