


Assembly Instructions

LCC-279 Classic Round 46" Table

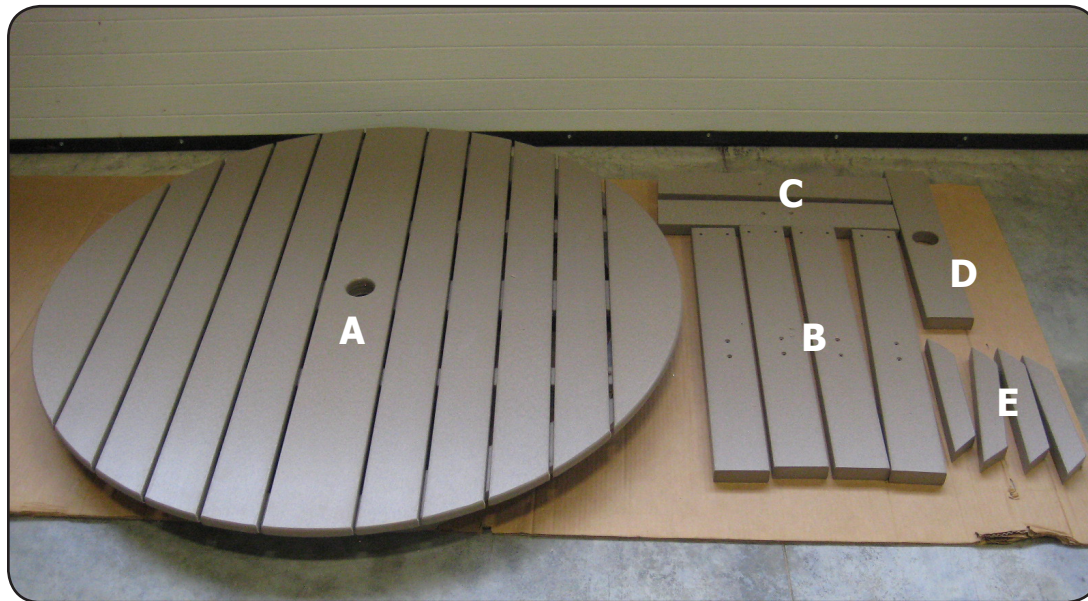


Required Tools:

- Hammer
- Cordless Drill
- #2 Square Drive bit
- 7/16" Wrench or Socket
- Tape Measure


Hardware:

- (8) 1/4" x 2" Bolts
- (8) 1/4" Flange Nuts
- (12) 2 1/2" Screws
- (4) 2" Screws
- (4) 1 1/4" Screws

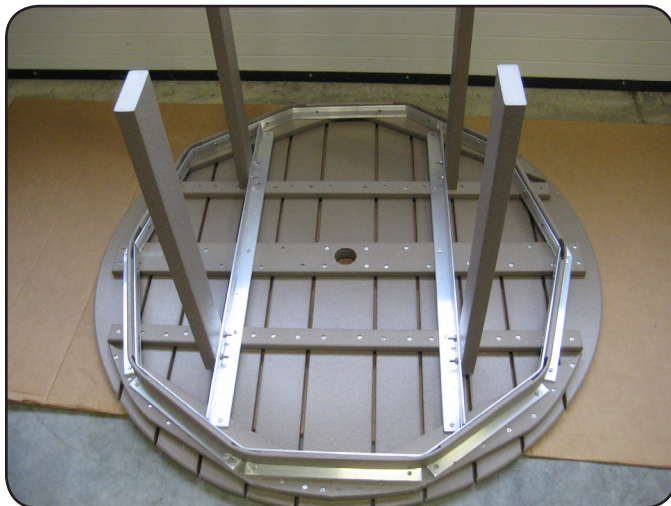

Step 1

Lay table (A) upside down on a soft surface and attach 4 legs (B) on outside of cleats where shown with (8) 2" bolts and nuts. NOTE: make sure countersink holes are on outside of legs for step 3.

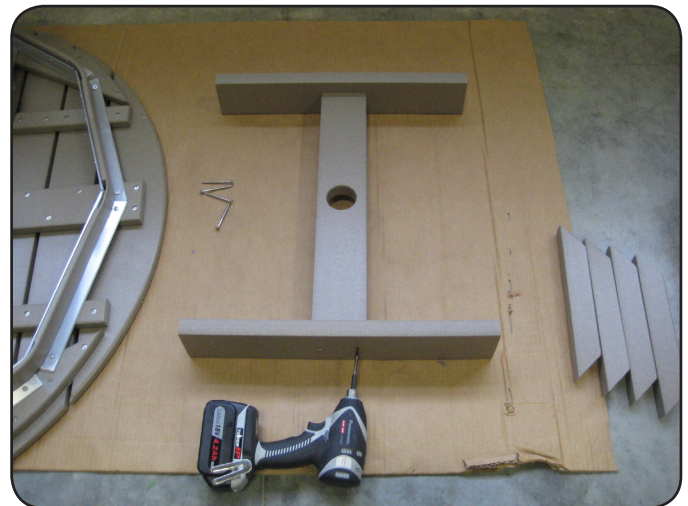

Step 2

Position leg supports (C) and center cross support with umbrella hole (D) as shown and fasten with (4) 2 1/2" screws through predrilled holes provided.




www.wildridge.com

330-893-4212

Assembly Instructions

LCC-279 Classic Round 46" Table

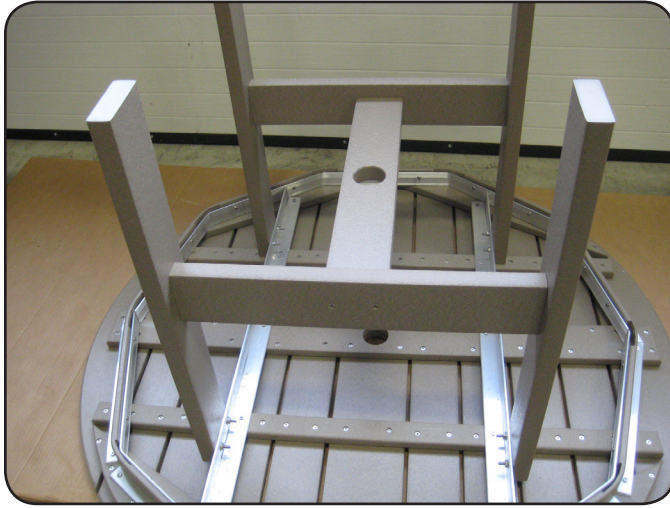

Step 3

Now position the assembly where shown in between legs and fasten with (8) 2 1/2" screws through pre-drilled holes measuring 11" from the bottom of leg to assembly.



Step 4

Fasten brace to inside of leg where shown with a 2" screw and a 1 1/4" screw from inside through hole in angle iron into other end of brace. Repeat other 3 sides.



Complete

WILDRIDGE[®]
PURVEYORS OF QUALITY POLY FURNITURE

www.wildridge.com

330-893-4212