



Assembly Instructions

Poly 44" Square Walk-in Table



*Thank you for choosing **A&L Furniture Co.***

We hope that this piece brings you many years of enjoyment!

For help with assembling your furniture,
or if you have missing hardware, please email us at
help@aandlfurniture.com or call us at 866-896-5747

PARTS (included)

- Ⓐ Table Top Assembly (2)
- Ⓑ Table Leg Assemblies (2)
- Ⓒ Bench Tops (4)
- Ⓓ 1"x5½"x14" Bench Leg Supports (8)
- Ⓔ 1"x5½"x32" Bench Bottoms (4)

TOOLS NEEDED

Power drill or screwdriver

HARDWARE (included)

- 2½" Screws (64)
- 1½" Screws (4)
- ¾" Screws (20)
- 36" Aluminum Strips (2)
- 24" Aluminum Strips (2)
- Small Poly Blocks (2)
- Square Drive Bit (1)

STEP 1

Lay the table tops upside down. Place the 36" aluminum strips along the outside crosspieces on the top & place the 24" aluminum strips along the center crosspieces centering them lengthwise. Attach with the ¾" screws, 6 screws in the 36" piece & 4 screws in the 24" piece. (See photo 1.) Now attach the small poly blocks on the end of the leg slots. Attach with 2 - 1½" screws in each block. (See photo 2.)



photo 1



photo 2

STEP 2

Assemble the 4 bench legs. Take two leg supports and attach to a bench bottom. Put two 2½" screws in the predrilled holes in each end of the bench bottom and screw into one end of the leg supports. (See photo 3.)

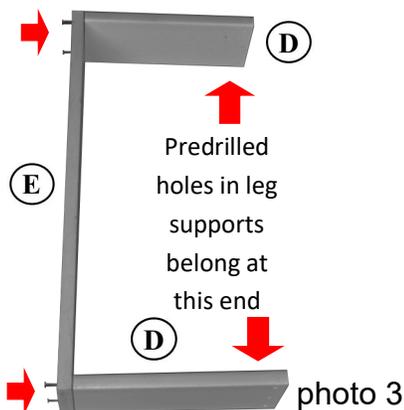


photo 3

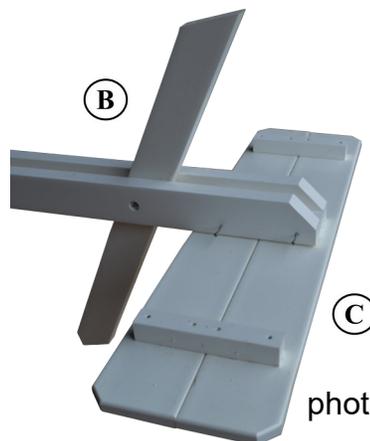


photo 4

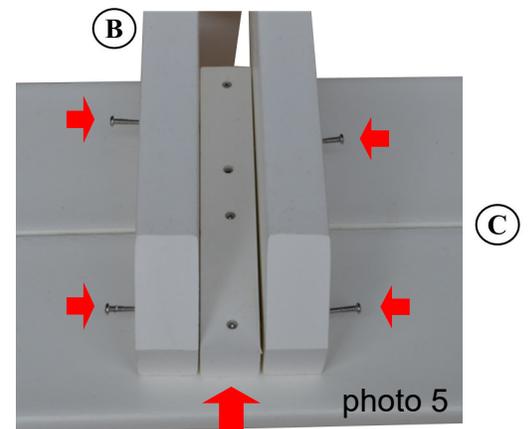


photo 5

STEP 3

Unfold a table leg assembly & place upside down on a table. (See photo 4.) Take a bench top & place upside down with the center 2x2 between the 2x4 table leg support beams. Attach with two 2½" screws on each side. (See photos 4 and 5)

Keep 2x2 even with leg supports

STEP 4

Now take the bench leg assemblies from Step 2 and place them on the seat. Center with the 2x2 on the bench top. Attach with two 2½" screws on each end. (See photos 6 & 7.)

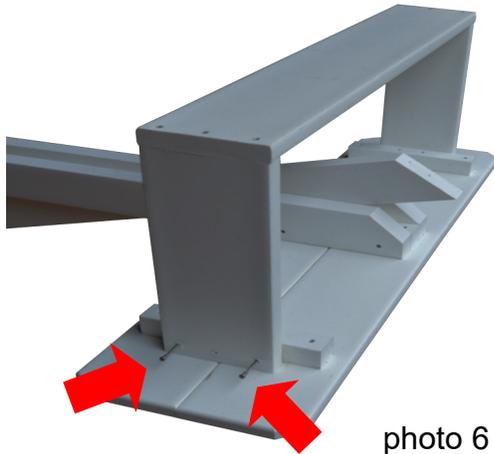


photo 6

Center on 2x2 strips

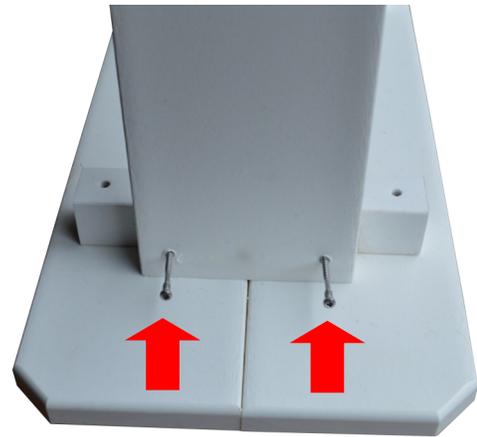


photo 7

STEP 5

Fold the center leg down and attach to the bench bottom. Put one 2½" screw in the predrilled hole in the center of the bench bottom and screw up into the leg. (See photo 8.) Now, put the 2 base assemblies together & screw together with 4 - 2½" screws. (See photos 9 & 10.)

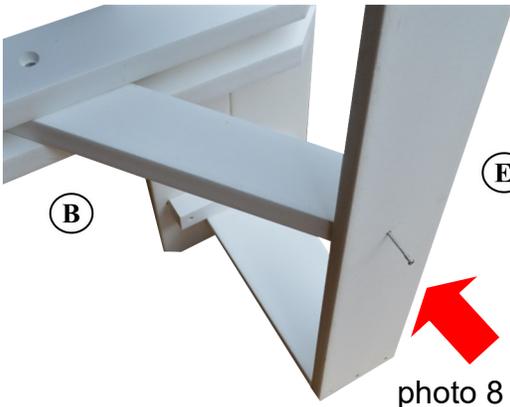


photo 8



photo 9

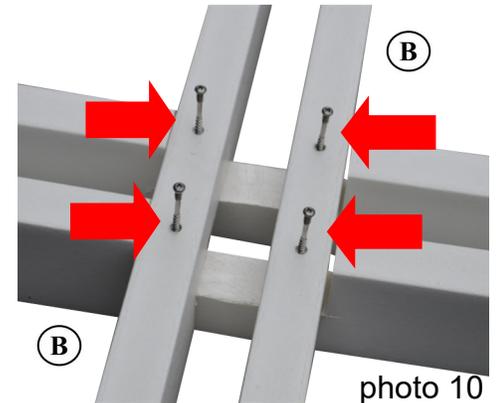


photo 10

STEP 6

Place the table top on the base and latch down into the 4 corners between the 2x2 braces. (See photo 11.) Put one 2½" screw into each 2x2 and screw into the top of the legs. (See photo 12.)

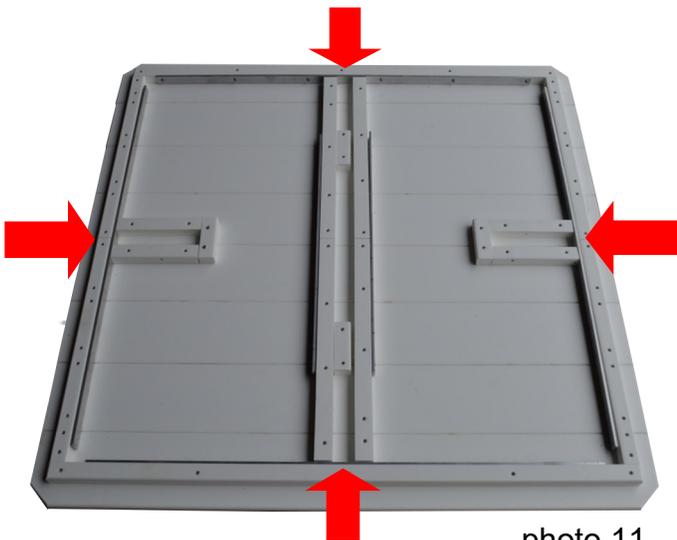


photo 11

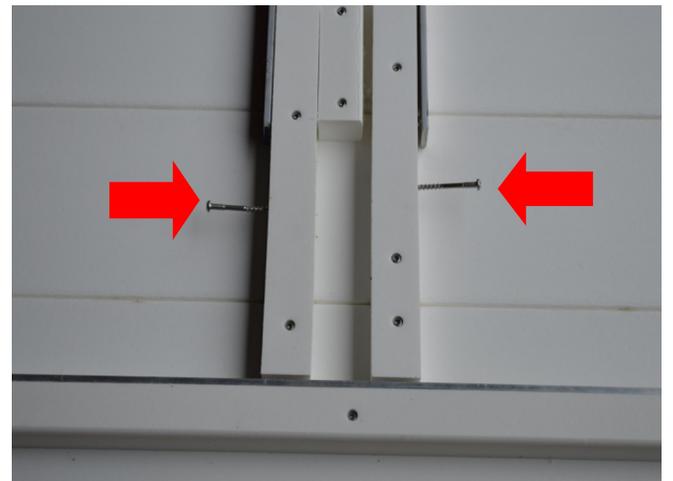


photo 12