









OT TABLE





ALIS BRIGHT 36 DOUBLE DOME LIGHT WITH CEILING STRUCTURE

36 Led + 36 Led
Cool white and warm white led
LUX - 110000 + 110000 (+/-) 10%
Focus Adjustable With Digital Controller
panal box
Brightness Control function
Memory Function
Endo Function With Remote With SMPS
(Power Supply)
Power Source Electricity

Dome Diameter 580 mm
Size of Light field 150 mm
Diameter of Light 150 mm
Color Temperature 3500-6200 K
Color Reduction Index 96
Led Life >50000 hours With SS
structure (Ceiling)
Power Supply 220v/50Hz AC







ALIS BRIGHT 84 DOUBLE DOME LIGHT WITH CEILING STRUCTURE

84+84 Led

Cool white and warm white led 140000+140000 lux (+/-) 10%

Focus Adjustable With Digital Controller panal box Brightness Control function Memory Function

Endo Function With Remote With SMPS (Power Supply)

Power Source Electricity

Dome Diameter 580 mm

Size of Light field 150 mm Diameter of Light 150 mm

Color Temperature 3500-6200 K
Color Reduction Index 96 Led Life
>50000 hours With SS structure
(Ceiling)/ Powder coated Structure is
optional Power Supply 220v/50Hz AC











ALIS PRO 48 SERIES (PREMIUM O.T LIGHT)

48 +48 Led with HD Lens (Big)

Cool white and warm white led 200000+200000 lux (+/-) 10%

Focus Adjustable (Push Button Handle) With Digital

Controller panal box

Brightness Control function

Memory Function

Endo Function With Remote With SMPS (Power

Supply)

Power Source Electricity Dome Diameter 700 mm **Spot Diameter 200-250 mm Diameter** of Light 150 mm Color Reduction Index 95ra Led Life >50000 hours With SS structure (Ceiling) Power Supply 220v/50Hz AC







76 + 76 Led

Cool white and warm white led 130000+130000 lux (+/-) 10%

Focus Adjustable (Push Button Handle) With Digital Controller panal box Brightness Control function Memory Function

Endo Function With Remote With SMPS (Power Supply)

Power Source Electricity
Dome Diameter 700 mm
Spot Diameter 200-250 mm Diameter
of Light 150 mm Color Reduction
Index 95ra Led Life >50000 hours
With SS structure (Ceiling) Power
Supply 220v/50Hz AC







76 Led

Cool white and warm white led 130000 lux (+/-) 10% Focus Adjustable (Push Button Handle) With Digital Controller panal box Brightness Control function Memory Function Endo Function With Remote With SMPS (Power Supply)

Power Source Electricity
Dome Diameter 580 mm
Size of Light field 150 mm
Diameter of Light 150 mm
Color Temperature 3500-6200 K
Color Reduction Index 96 Led Life
>50000 hours With SS structure
(Ceiling) Power Supply 220v/50Hz AC









ALIS BRIGHT 21 EXAMINATION LIGHT

21led

Cool white and warm white led 60000 lux
Flexible arm With Controller panal box
Brightness Controller function On/off SS pipe
With Modular Plastic base with Twin Wheels
Size of Light field 125 mm
Diameter of Light 150 mm
Color Temperature 4000-5000 K
Color Reduction Index 93RA
Led Life >50000 hours
Power Supply 220v/50Hz



Note:- Also Available in Wall mount









ALIS MINI STAR 7 EXAMINATION LIGHT

7led

Cool white and warm white led 30000 lux

Flexible arm SS Claimp (Wall Mount)

Size of Light field 125 mm With Controller panal

box

Brightness Controller function On/off

Diameter of Light 150 mm

Color Temperature 4000-5000 K

Color Reduction Index 93RA Led Life >50000

hours

Power Supply 220v/50Hz ac



Note:- Also Available in Stand









ALIS STAR 19 EXAMINATION LIGHT WITH STAND

Cool white and warm white led 55000 lux
Flexible arm With Controller panal box
Brightness Controller function On/off SS pipe
With Modular Plastic base with Twin
Wheels Size of Light field 125 mm
Diameter of Light 150 mm
Color Temperature 4000-5000 K Color
Reduction Index 93RA Led Life >50000 hours
Power Supply 220v/50Hz AC



Note:- Also Available in Wall mount









OPERATION THEATER TABLE

Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 1030mm TB/RTB 22degree Back Section Adjustment 80/20 degree

Alis-110 Electro Hydro Top Sliding with manual over ride.

Alis-111 Electro Hydro with manual Over ride

- Five Section table top gives easy for various surgical positions
- Base & column cover are covered with 304G stainless steel to ensure high durability & hygiene for the operation room
- Leg section & Head section interchangeable Radio-translucent to provides easy convenience for x-ray procedures
- All positions operated by remote control as well as manually.
- Additional control panel on central column.










ELECTRO-MATIC C-ARM TABLE

Model no. Alis-1200

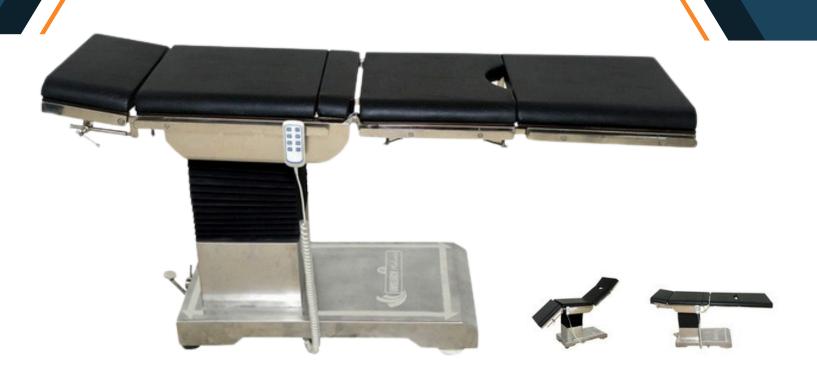

Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 1030mm TB/RTB 22degree Back Section Adjustment 80/20 degree







SEMI-ELECTRIC C-ARM TABLE

Model no. Alis-1201



Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 980mm TB/RTB 22 degree Back Section Adjustment 80/20 degree







HYDRAULIC C-ARM TABLE

Model no.
Alis-1350



Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 1030mm TB/RTB 22degree Back Section Adjustment 80/20 degree







DERMATOLOGY CHAIR

Model no. Alis-1344



Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 1030mm TB/RTB 22degree Back Section Adjustment 80/20 degree







BARYTIC C-ARM OPERTATION TABLE

Model no. Alis-1650

Overall Length of the table 1950mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 1030mm TB/RTB 22degree Back Section Adjustment 80/20 degree



• USM-1005 series provides 250mm of table top slide. Reverse patient orientation mode, extended height adjustment range 730-980 mm. Powered with manual kidney bridge and greater table top tilt capability all together for the best full body image coverage and an easy access of C-ARM. Its outstanding performance allows the surgical team to handle well from the general surgeries to the specialized surgical procedures









ELECTROMATIC GYANIC OPERTATION TABLE

Model no.
Alis-1550



Overall Length of the table 1800mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 980mm TB/RTB 22 degree Back Section Adjustment 80/20 degree







ELECTROMATIC GYANIC OPERTATION TABLE

Model no. Alis-1800



Overall Length of the table 1800mm Overall width of the table 530mm Minimum height of the table 730mm Maximum height of the table 980mm TB/RTB 22 degree Back Section Adjustment 80/20 degree







INFANT/ BABY WARMER

Model no. <mark>Ali</mark>s-1860



- Fire Resistant & Shock Proof Resin Engineered Body.
- Warmer with Fixed Baby Cradle.
- Micro Processor Based Servo Controller
- Modes of Operation: Servo Skin, AIR, Pre-Warm, Manual.
- Two Digital Displays For Baby Temp. & Set Temp. Monitoring.
- User Friendly Soft Touch Buttons.
- °F and °C Converter.
- Stands for Monitor, Infusion Pumps & I.V Pole.
- Swivelling Top for X-ray and easy Access
- LED Illumination for Observation.
- Safety Alarms with High Temp. cut-off.

With high quality mattress, four side clear acrylic walls with front and both sides collapsible, head front & back tilt facility, clear acrylic base for under surface phototherapy.







INFANT/ BABY PHOTO THERAPY MACHINE

Model no. Alis-1890



- LED Phototherapy with high bright super flux LED Lamps specially suitable for Jaundice Treatment.
- >100,000 Burning Hours Life.
- Treatment Irradiance at Skin Level upto 60uw/cm sqr/nm at 30cm with Wave Length 420 to 500nm.
- Upto 30% faster serum bilirubin breakdown compared to conventional phototherapy.
- Digital timer for total lamp usage & patient exposure.
- Designed to uniformly distribute light on the patient surface area.
- Fire Resistant Resin Engineered Body
- Electric Shock Proof, free from corrosion, anti-skid Castors.
- Transparent Base for Two Way Phototherapy (Bottom and Top), Designed to be perfectly compatible with Phototherapy and X-Ray Cassette.













ASHISH VERMA

+91 98142 62255



INFO@ROYALINTERNATIONAL.ORG

JALANDHAR, PUNJAB (FACTORY)

115 - A WARYANA INDUSTRIAL COMPLEX, KAPURTHALA ROAD, JALANDHAR, PUNJAB, 144021

DELHI (CORPORATE OFFICE)

237, 2ND FLOOR WESTEND MALL, NEAR DISTRICT CENTER, JANAKPURI WEST DELHI, INDIA

DELHI (WAREHOUSE)

PLOT NO. 581, KAKROLA HOUSING COMPLEX DWARKA MOR, PILLAR NO 802, DELHI INDIA

