



PN: 36100
Model Number: 36M-CLA
Revised September 28, 2022



Safe Jack Conex Lifting Adapter Instruction Manual

SAFE JACK

SUPPORT YOUR
WORLD




The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors, which cannot be built into this product, but must be supplied by the operator.



WARNING: Do not allow anyone in or near the Conex/Shipping Container while using the jack. Sudden movement and weight shift can result in instability. Keep all personnel a safe distance away from the container.



WARNING: Do not attempt to lift the Conex/Shipping container on a side or longitudinal slope. The Conex/Shipping Container can shift causing severe injury or death.

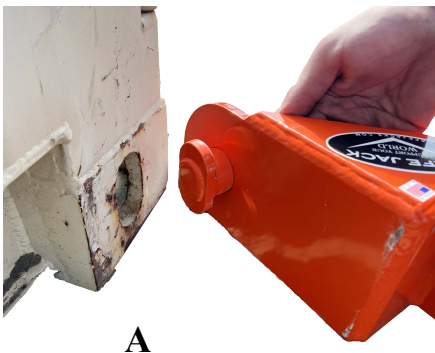

A



B

Step 1:
Turn Conex Lifting Adapter
90 degrees. Insert into
receiving hole of Conex.
Figure A & B



C

Step 2:
Turn Conex Lifting Adapter upright to lock into place.

Figure C



D

Step 3:
Place bottle jack under the Conex Lifting Adapter. **Figure D**

Step 4:
Extend the screw of the bottle jack until the saddle makes contact with the receiving pocket of the Conex Lifting Adapter.

Figure E



E

Step 5:
Ensure that the bottle jack is straight and in the upright position.

Figure F & G

Step 6:
Lift Conex to the desired height. **Figure H**



F



G



H

SafeJacks.com

(509) 735-2106



Safe Jack by Bogert Manufacturing Inc.
3606 N. Swallow Ave. Ste 200
Pasco, WA 99301 USA
(509) 735-2106 Phone
(800) 627-8088 Toll Free
(509) 272-0280 Fax
www.safejacks.com
info@bogert-mfg.com

