



PN: 51104, Model Number: 51M-SLING
PN: 51105, Model Number: 51M-375CHAIN
PN: 51108, Model Number: 51M-MP36
PN Instructions: 51001
Revised June 13, 2019



Safe Jack Chain & Sling Instruction Manual

The warnings, precautions, and instructions discussed in this manual cannot cover all possible conditions and situations that may occur. The operator must understand that common sense and caution are factors, which cannot be built into this product, but must be supplied by the operator.

Part Number	Model Number	Description
51105	51M-375CHAIN	6' Long 3/8" Chain is Grade 30 Max Rated 2650 lbs.

Part Number	Model Number	Description
51104	51M-SLING	Flat-Eye Web Sling, 2" Wide, 4950 lbs. Polyester, 4ft in length.


Sling Working Load Limit:

Choker: 4,960 lbs
Vertical: 6,200 lbs.
Double Basket: 20,000 lbs.
Basket: 12,400 lbs.

Part Number	Model Number	Description
51108	51M-MP36	Master Pull Mini Mac Rigging Line, 21,500 lbs. 3ft in length.

Rigging Line Working Load Limit:

Vertical: 21,500 lbs
Basket: 43,000 lbs

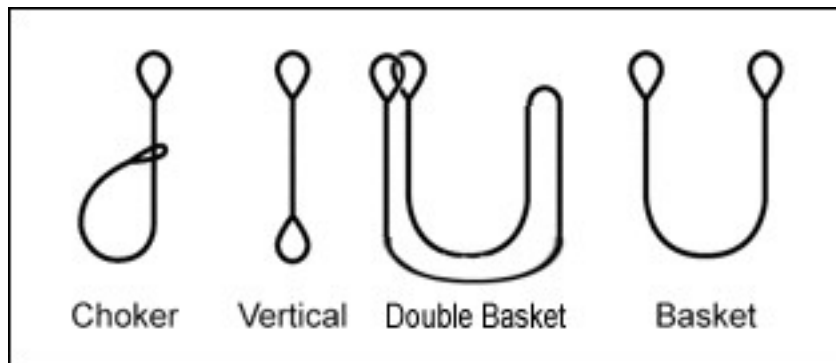

If you are missing any parts please call 1-509-735-2106 immediately and reference which parts.



WARNING: Do not allow anyone in or near the vehicle while using the jack. Sudden movement and weight shift can result in instability. Keep all personnel a safe distance away from the vehicle.



WARNING: Do not attempt to lift the vehicle on a side or longitudinal slope. The vehicle can slide or roll causing severe injury or death.



WARNING: Before lifting, place the vehicle's transmission in "PARK" for automatic transmissions and Low gear (1st gear) for manual transmissions. Set the vehicle's emergency brake. Then, block the wheel diagonal to the wheel that is being lifted, with wheel chocks. Failure to follow this instruction can result in severe injury or death to personnel.



SafeJacks.com

(509) 735-2106



Safe Jack by Bogert Manufacturing Inc.
3606 N. Swallow Ave. Ste 200
Pasco, WA 99301 USA
(509) 735-2106 Phone
(800) 627-8088 Toll Free
(509) 272-0280 Fax
www.safejacks.com
info@bogert-mfg.com

