


# PACKAGES

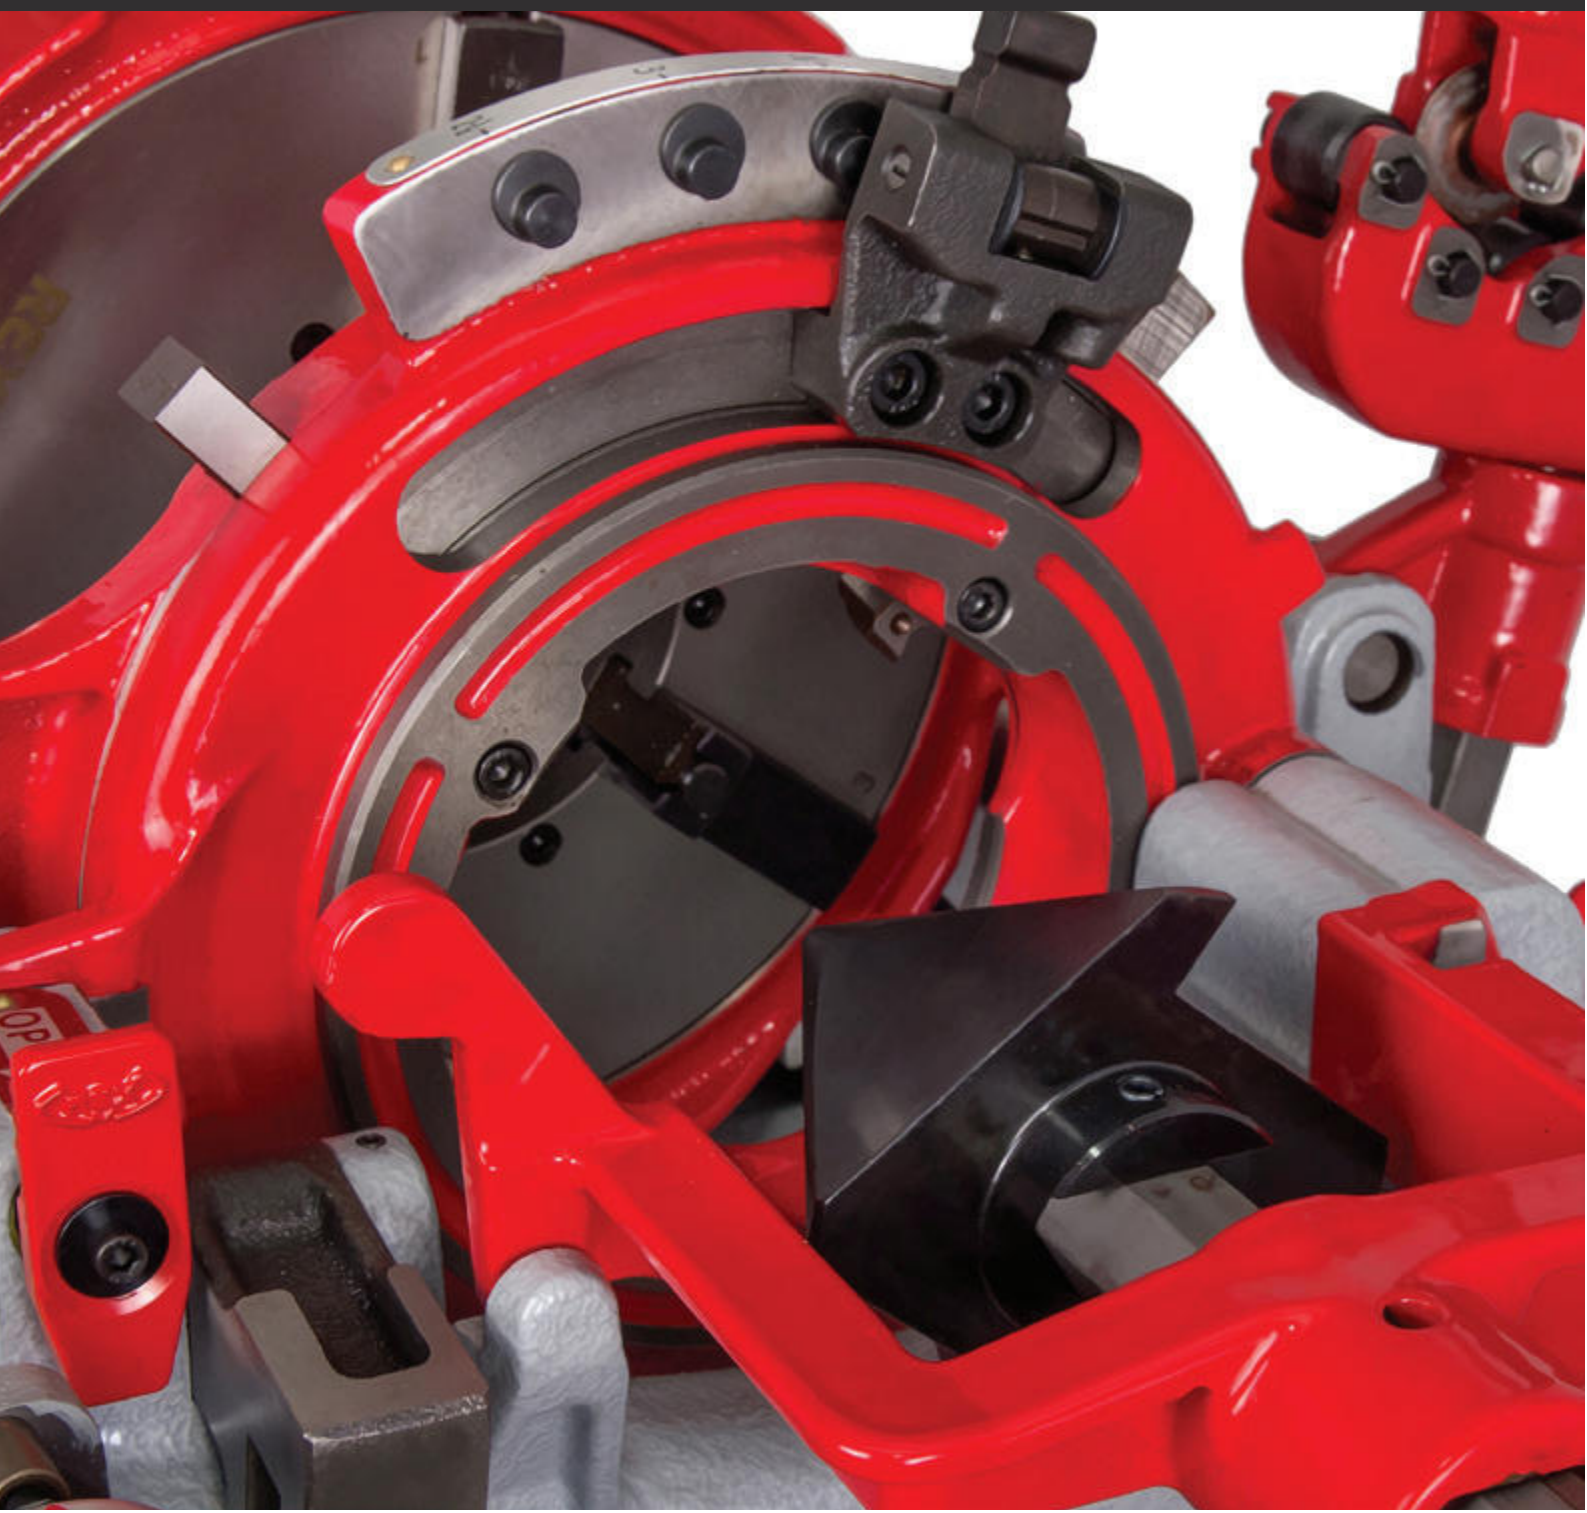

# PACKAGES

SAVE  
WITH  
PACKS!

## RGPACK

### CUTTING & GROOVING PACKAGE

#### PACKAGE INCLUDES:

##### **POWER DRIVE & ROLL GROOVING ATTACHMENT (2 - 6")** RX-341323

- Anti-slipping device for safe, efficient processing
- Groove depth easily adjusted
- Wind down feed handle facilitates light and easy operation

##### **EXACTCUT** PEC170E

- Lightweight (5.7kg) pipe cutting system
- Range of use: 15 - 170mm
- Max pipe wall thickness: 8mm for steel or 14mm for plastics

##### **PROFESSIONAL PIPE STAND** PS-FLD-V

- Convenient adjusting screw
- Hardened steel locking ring
- Powder painted and zinc phosphate-plated outer surfaces to resist corrosion
- Working height range: min 730mm - max 1250mm



# PACKAGES

## THRGAPACK1

### THREADING, CUTTING & GROOVING PACKAGE 1

#### PACKAGE INCLUDES:

##### PIPE THREADING MACHINE (½ - 2")

RX-218232

- User-friendly design & easy pipe size adjustment
- Thread length can be adjusted by changing the lever contact (except manual Die head)
- Die head can be opened manually or automatically

##### ROLL GROOVING ATTACHMENT (2 - 6")

RX-341501

- Anti-slipping device for safe, efficient processing
- Groove depth easily adjusted
- Wind down feed handle facilitates light and easy operation

##### EXACTCUT

PEC170E

- Lightweight (5.7kg) pipe cutting system
- Range of use: 15 - 170mm
- Max pipe wall thickness: 8mm for steel or 14mm for plastics

##### PROFESSIONAL PIPE STAND

PS-FLD-V

- Convenient adjusting screw
- Hardened steel locking ring
- Powder painted and zinc phosphate-plated outer surfaces to resist corrosion
- Working height range: min 730mm - max 1250mm





# PACKAGES

## THRGAPACK2

### THREADING & GROOVING PACKAGE 2

#### PACKAGE INCLUDES:

##### **PIPE THREADING MACHINE (½ - 2")** RX-218232

- User-friendly design & easy pipe size adjustment
- Thread length can be adjusted by changing the lever contact (except manual Die head)
- Die head can be opened manually or automatically

##### **ROLL GROOVING ATTACHMENT (2 - 6")** RX-341501

- Anti-slipping device for safe, efficient processing
- Groove depth easily adjusted
- Wind down feed handle facilitates light and easy operation

##### **PROFESSIONAL PIPE STAND** PS-FLD-V

- Convenient adjusting screw
- Hardened steel locking ring
- Powder painted and zinc phosphate-plated outer surfaces to resist corrosion
- Working height range: min 730mm - max 1250mm

