


One of our most unique products, this Genuine Mahogany is salvaged from the manufacture of solid body electric guitars. This expensive tone wood was once thrown away before we partnered with a major guitar manufacturer to rescue this precious resource and make it one of our flagship products. Its rich tone and uniform character make it a desirable look for more refined interiors.

Dimensions and Profile	Color Options
<p>Thickness 3/8"</p> <p>Width 1.5"</p> <p>Lengths 24" - 96"</p> <p>Precision Tongue &amp; Groove</p>	



Certified Salvaged 100%  
 Choosing this product saves trees  
 And reduces the demand for new  
 Lumber.

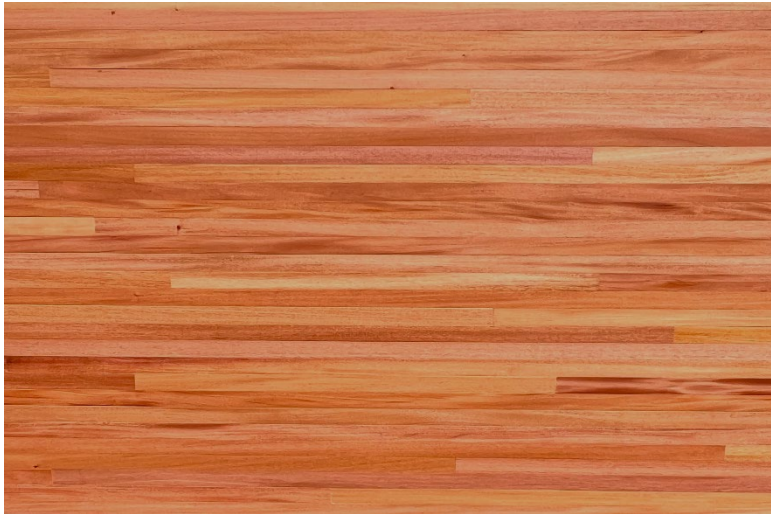

All finishes are Green Gold  
 Certified for indoor air quality.  
 UV based & commercially durable.



Meets TSCA Title VI compliance  
 For EPA formaldehyde  
 Emissions.

Manufacturer	WD Walls PO Box 2222 Lake Oswego, Oregon 97035 Sales@WDwalls.com
Specify Product Name	Encore- Mahogany
Price per Square Foot	\$15.95
Dimensions	Thickness 3/8" Width 1.5" Lengths 24"-96" Longer lengths available.
Milling Profile	Precision Tongue and Groove. (end cut by installer as needed)
Finish	Commercial Grade, UV Matte Finish. Zero VOC
Species	100% Salvaged Genuine Mahogany (Swietenia Macrophylla)
Character	Extremely fine grain. Very few knots. Uniform texture and color.
Grade	The finest grade of Mahogany on the market. This grade is used in the manufacture of solid body electric guitars. Allowable but not common are; unlimited grain combinations; heartwood & sapwood; knots, including some that may be open/missing or extend to plank edge; & non-structural checks & cracks. We recommend ordering 7-10% additional material for onsite grading and trimming for installation.
Hardness	900 using Janka Ball test (ASTM D1037-96A). Natural wood products have no minimum hardness specifications since individual plank values vary depending on cell structure & wood grain.
Fire Rating	Class C. OPTION: add Class A fire retardant finish for \$2.95/ SF
Certified Sustainable	Certified Salvage 100% Pre-consumer reclaimed. Choosing this product saves trees & reduces demand for new lumber. Green Guard Gold certified finishes for indoor air quality.
Made in the USA	Salvaged on the West Coast and manufactured in Portland Oregon
Shipping	Material is bundle packaged palletized for transportation. 1.1 LB per SF weight
Installation	Store, handle and install per Architectural Woodwork Standards (AWS) 2nd Edition (2014), Section 8: Wall/Ceiling Surfacing and Partitions, available at <a href="http://www.awinet.org">www.awinet.org</a> . <b>Typical installation:</b> paneling is mechanically fastened to a backing sheet (drywall or plywood) using nails or fasteners located in the tongue, concealed from exposed surfaces. Some pieces are to be square cut by installer at the time of installation for starting or ending rows. Paneling can also be securely glued with adhesive and/or face nailed were essential.