




This flagship material is a show-stopping mix of dense hardwoods that arrive in Portland as transpacific shipping crates carrying steel railroad tracks. Designers love the mix of colors, punctuated by vertical jet-black lines where the tracks sat on the crates. We reclaim this wood ourselves, to rescue it and give it new life in Jakarta Paneling.

Dimensions and Profile	Color Options	
<p>Thickness 9/16" Width 2-3/4" Lengths 24" - 56"</p> <p>Precision Tongue & Groove</p>	 <p data-bbox="607 1283 833 1318">Jakarta- Rustic</p>	 <p data-bbox="1105 1283 1354 1318">Jakarta- Smooth</p>

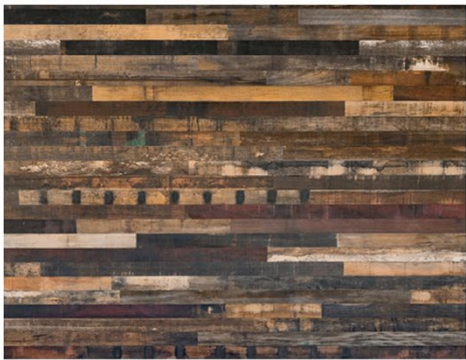

FSC Certified Recycled 100%
Choosing this product saves trees
And reduces the demand for new
Lumber.



All finishes are Green Gold
Certified for indoor air quality.



Meets TSCA Title VI compliance
For EPA formaldehyde
Emissions.

Manufacturer	WD Walls PO Box 2222 Lake Oswego, Oregon 97035 Sales@WDwalls.com
Specify Product Name	Jakarta Rustic
Color Options also available	Jakarta Smooth
Price per Square Foot	Rustic and Smooth \$15.95
Dimensions	Thickness 9/16" Width 2-3/4" Lengths 24"-56"
Milling Profile	Precision Tongue and Groove. (end cut by installer as needed)
Finish	Greenguard Gold, VOC free, plant based hard oil finish. CARB II compliant.
Species	Various reclaimed tropical species
Character	Unlimited color variation is inherent to the product. Contains all hues of red, brown, tan & deep gold among others. Weathered original board faces contain uneven surfaces (over/underwood), saw marks, fastener marks, indentations, oxide staining, & discoloration from prior use; unlimited grain combinations; heartwood & sapwood; nail & pinholes; knots; non-structural checks & cracks.
Grade	Character grade. We recommend ordering 9-12% additional material for onsite grading, defecting, trimming & other installation factors to achieve design intent.
Hardness	1100-3500 using Janka Ball test (ASTM D1037-96A). Natural wood products have no minimum hardness specifications since individual plank values vary depending on cell structure & wood grain.
Fire Rating	Class C. OPTION: add Class A fire retardant finish for \$2.95/ SF
Certified Sustainable	FSC® Recycled 100% (SA-COC-002372-220). Post-consumer reclaimed. Choosing this product saves trees & reduces demand for new lumber. Greenguard Gold certified finishes for indoor air quality.
Made in the USA	Reclaimed on the West Coast and manufactured in Portland Oregon
Shipping	Material is bundle packaged palletized for transportation. 2.2 LB per SF weight
Installation	Store, handle and install per Architectural Woodwork Standards (AWS) 2nd Edition (2014), Section 8: Wall/Ceiling Surfacing and Partitions, available at www.awinet.org . Typical installation: paneling is mechanically fastened to a backing sheet (drywall or plywood) using nails or fasteners located in the tongue, concealed from exposed surfaces. Some pieces are to be square cut by installer at the time of installation for starting or ending rows. Paneling can also be securely glued with adhesive and/or face nailed where essential.