


Fill in the Blank Fields  
with Your Measurements

<b>INPUT</b>	BODY WIDTH		<b>Name</b>	_____
	TIRE WIDTH			_____
	BACK SPACE		<b>Phone</b>	_____
	WHL WD			<b>Cust #</b>
	<b>SPEC FRAME WD</b>		<b>E-mail</b>	_____
	<b>SPEC AF-AF</b>			_____

	FRAME WIDTH	TIRE-TIRE OUTSIDE	TIRE-TIRE INSIDE	BODY-TIRE CLR	TIRE-FRAME CLR
<b>STANDARD</b>	22	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W
	24	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W
	26	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W
	28	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W
<b>SPEC</b>	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W	T.B.D. by S&W

**Take Your Measurements  
& Contact Our Sales Staff  
at 1-800-523-3353**

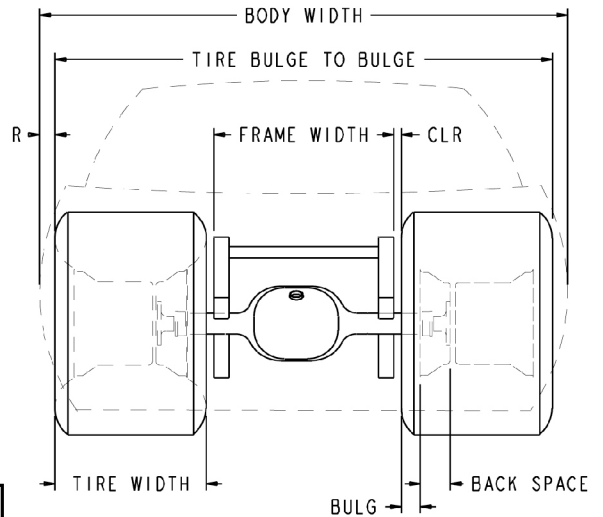

<b>Common Tires for Your Reference</b>	SIZE	MAX WIDTH
M-T	29x18.5	17.6
M-T	31X18.5R-15LT	17.6
M-T	33X21.5-15LT	20.2
HOOSIER	31X18.5R-15LT	18.0
HOOSIER	33X21.5R-15LT	21.3
GOODYEAR	32X14-15	17.0
GOODYEAR	32X16-15	18.4
GOODYEAR	33X15-15	17.5
GOODYEAR	33X17-15	20.5

STANDARD FRAME WIDTH	STD AF-AF
22	<b>37.25</b>
24	<b>39.25</b>
26	<b>41.25</b>
28	<b>43.25</b>