


Direct Mount Ball Valve

Lead Free Brass, 2 Piece, Full Port, Threaded Connection, Stainless Steel Trim, ISO Mounting Pad, 600 WOG

A101



FEATURES


- Dezincification Resistant Brass Alloy
- ISO 5211 Direct Mounting Pad
- Square Valve Stem for Direct Mounting to any ISO Actuator
- Latch Lock May be Locked in Open or Closed Position
- Blow-Out Proof Stem
- 100% Leak Tested
- Wetted Surfaces Contain Less than .25% Lead Content

CERTIFICATIONS/APPROVALS

- NSF 61-8
- NSF 372
- MSS SP-110
- ANSI B1.20.1
- RoHS Compliant

VALVE SEAT RATING

600 WOG - 150 WSP

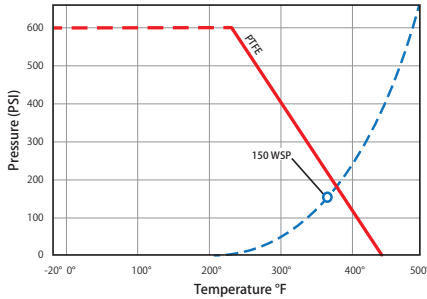

MATERIALS

No.	Part	Material
1	Body	Lead Free Brass - C46500
2	Seat (2)	PTFE
3	Ball	304 Stainless Steel
4	Stem Seat	PTFE
5	Stem	304 Stainless Steel
6	O-Ring (2)	Viton®
7	Screw	Nickel Plated Steel
8	Packing Nut	Nickel Plated Brass - C37700
9	Gasket	Nylon
10	Handle	Chrome PLated Steel
11	End Connection	Lead Free Brass

DIMENSIONS

Part No	Size	A	B	C	D	E	F	G	H	J	ISO	Torque
A101-12	1/2"	2.39	2.34	4.76	0.59	1.14	0.37	0.35	1.42	0.23	F03	31
A101-34	3/4"	2.57	2.48	4.76	0.75	1.28	0.37	0.35	1.42	0.23	F03	62
A101-1	1"	2.97	2.85	6.73	0.98	1.59	0.39	0.43	1.97	0.28	F05	89
A101-114	1-1/4"	3.44	3.15	6.73	1.26	1.82	0.39	0.43	1.97	0.28	F05	98
A101-112	1-1/2"	3.88	3.64	6.73	1.57	2.32	0.43	0.43	1.97	0.28	F05	115
A101-2	2"	4.29	3.94	6.73	1.94	2.62	0.43	0.43	1.97	0.28	F05	133

Note: Torque is in (in-lb)