




Direct Mount Ball Valve

Brass, 3-Way, Standard Port, T or L Port, Threaded Connection, ISO Mounting Pad, 400 WOG

A-751T/L



| Lever Assembly | Flow Options | | | | | |
|----------------|--------------|--|--|--------|--|--|
| | T-Port | | | L-Port | | |
| Position 1 | | | | | | |
| Position 2 | | | | | | |

FEATURES


- ISO 5211 Direct Mounting Pad
- Square Valve Stem for Direct Mounting to any ISO Actuator
- Four Seats Standard
- Blow-Out Proof Stem
- Ships with Lever Handle

CERTIFICATIONS/APPROVALS

ANSI B1.20.1

VALVE SEAT RATING

400 WOG - 100 WSP

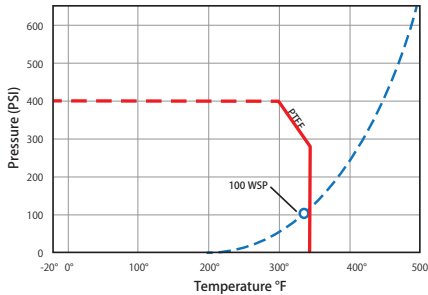

MATERIALS

| No. | Part | Material |
|-----|--------------------|------------------------------|
| 1 | Body | Brass - CW617N |
| 2 | End Connection (3) | Brass - CW617N |
| 3 | Ball | Chrome Plated Brass - CW617N |
| 4 | Seat (4) | PTFE |
| 5 | Stem Seal | PTFE |
| 6 | O-ring (2) | Viton® |
| 7 | Body O-ring (4) | Viton® |
| 8 | Screw* | Steel |
| 9 | Bushing* | Brass - CW614N |
| 10 | Stem | Brass - CW614N |
| 11 | Washer* | Nylon |
| 12 | Handle* | Steel |

*Only included on lever operated valves

DIMENSIONS

| Part No | Size | A | B | C | D | E | F | G | H | J | K | L | Torque |
|------------|--------|------|------|------|------|------|------|------|------|------|-----|------|--------|
| A751_-14* | 1/4" | 2.64 | 2.44 | 4.72 | 0.39 | 0.35 | 1.20 | 1.32 | 0.77 | 0.35 | F03 | 0.23 | 54 |
| A751_-38* | 3/8" | 2.64 | 2.44 | 4.72 | 0.43 | 0.35 | 1.20 | 1.32 | 0.77 | 0.35 | F03 | 0.23 | 54 |
| A751_-12 | 1/2" | 2.87 | 2.44 | 4.72 | 0.43 | 0.35 | 1.20 | 1.44 | 0.77 | 0.35 | F03 | 0.23 | 54 |
| A751_-34 | 3/4" | 3.19 | 2.52 | 4.72 | 0.59 | 0.35 | 1.29 | 1.60 | 0.87 | 0.35 | F03 | 0.23 | 54 |
| A751_-1 | 1" | 3.74 | 2.95 | 6.69 | 0.79 | 0.43 | 1.63 | 1.87 | 1.00 | 0.43 | F05 | 0.27 | 151 |
| A751_-114 | 1-1/4" | 4.39 | 3.17 | 6.69 | 0.98 | 0.43 | 1.85 | 2.20 | 1.22 | 0.43 | F05 | 0.27 | 151 |
| A751_-112 | 1-1/2" | 4.86 | 3.66 | 6.69 | 1.26 | 0.43 | 2.34 | 2.43 | 1.79 | 0.43 | F05 | 0.27 | 151 |
| A751_-2 | 2" | 5.73 | 4.43 | 9.05 | 1.57 | 0.59 | 2.90 | 2.87 | 1.75 | 0.55 | F07 | 0.35 | 275 |
| A751_-212* | 2-1/2" | 6.93 | 4.86 | 9.05 | 1.95 | 0.59 | 3.35 | 3.47 | 2.20 | 0.55 | F07 | 0.35 | 381 |
| A751_-3* | 3" | 7.08 | 4.86 | 9.05 | 1.95 | 0.59 | 3.35 | 3.54 | 2.20 | 0.55 | F07 | 0.35 | 381 |

_ = Must specify ball: T = T-Port, L = L-Port

*1/4" - 3/8" and 2-1/2" - 3" are model A750, see www.jomarvalve.com for detailed specification

Note: Torque is in (in-lb)

WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer, birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.