

The VP Series Carbon units are used where standard air flow volumes are required with minimal backpressure. These units include a false bottom and distributor screen to allow for even distribution and lower pressure drop.

APPLICATIONS:

- SVE and AST vapor effluent remediation for VOC's.



STANDARD SPECIFICATIONS:

VP-55: 24" Diameter x 35" Tall
 approx. 150 lbs Carbon
 200 scfm Max. Flow
 Dry Weight: 200 lbs

VP-85: 28" Diameter x 37" Tall
 approx. 300 lbs Carbon
 300 scfm Max. Flow
 Dry Weight: 400 lbs

VP-110: 32" Diameter x 43" Tall
 approx. 400 lbs Carbon
 600 scfm Max. Flow
 Dry Weight: 500 lbs

- False bottom allows for even distribution, lower pressure drop, and no channeling
- Open top drum allows for easy carbon access and change-out
- Custom inlet and outlet available in sizes between 2" and 6" FNPT
- Maximum pressure is 2 psi.

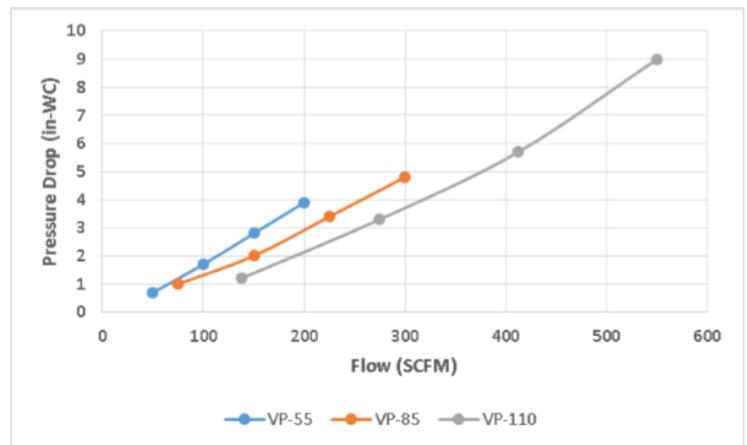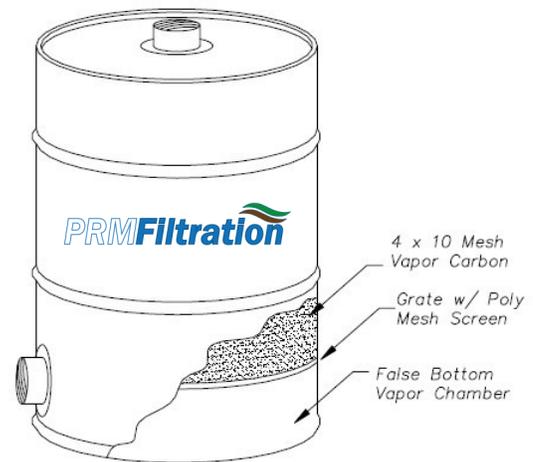

AVAILABILITY: Usually in stock, if manufactured, allow 1 to 2 weeks lead time