

FMDFG50 Rotameter



ROTAMETER FOR VAPOR EXTRACTION OR AIR SPARGE APPLICATIONS


PRM PART NUMBER: FMDFG50

FLOW RANGE: 10-100 SCFM

- Designed For Vapor Extraction, Air Sparge and other industrial air flow applications.
- Scaled for standard cubic feet per minute (SCFM) and can be used on pressure and high vacuum applications.
- Meter sizes designed to provide an ample working range and are less prone to failure through impact exposure.
- Larger than comparable meters on the market which provides a fine scale control for a higher degree of accuracy.

Specifications:

- Materials:
 - ◇ Body: Acrylic with replaceable Polypropylene end tails
 - ◇ 304 SS Float and travel rod
 - ◇ Viton® O-rings and seals
- Maximum 85 psig pressure rating
- Maximum Temperature rating of 125°F
- Accuracy: +/- 4% of full scale flow
- Connections: 2 Inch Female NPT

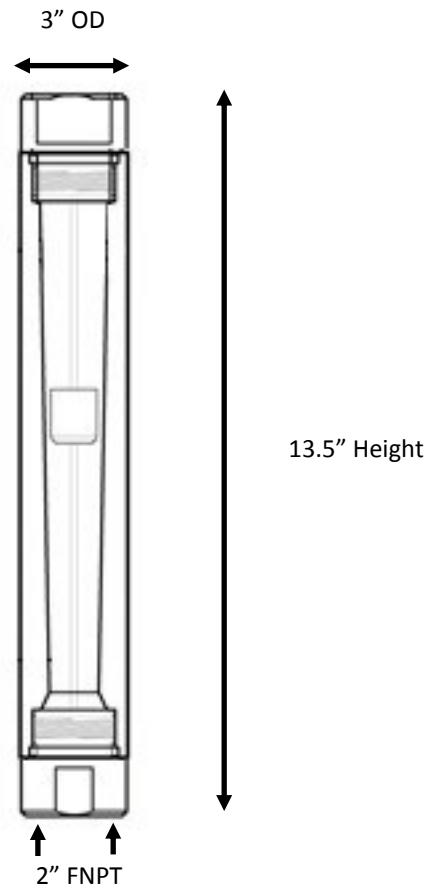

Information in this drawing is provided for reference only.

(888-TREAT-IT) • www.prmfiltration.com • sales@prmfiltration.com